
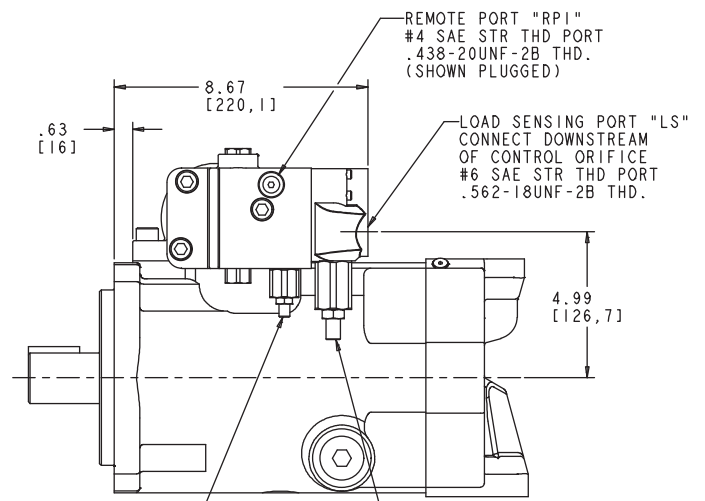
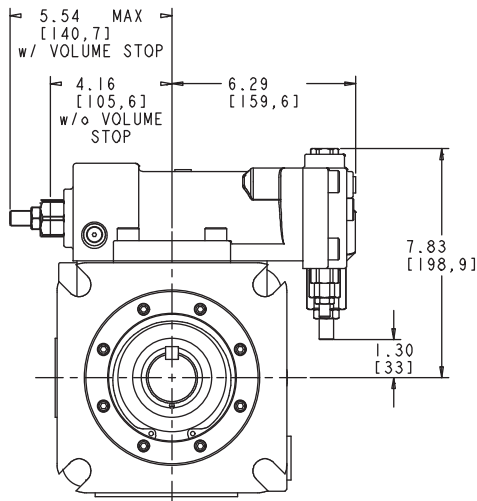
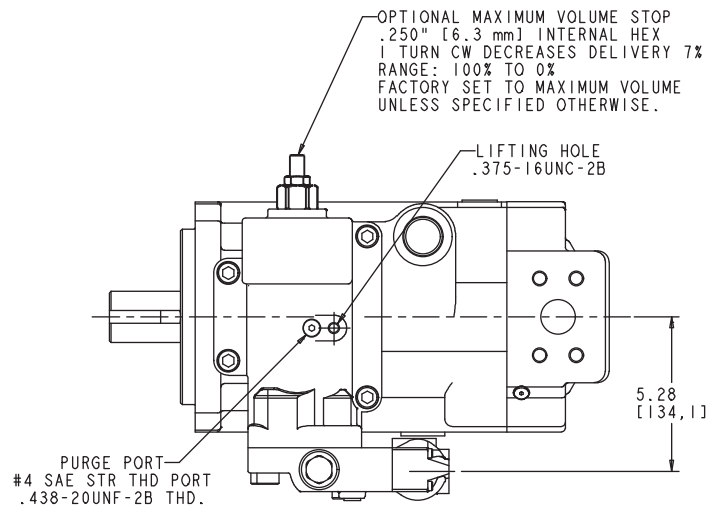


HYDRAULIC CIRCUIT

NOTES:

1. PUMPS DESIGNED FOR ONE-WAY SERVICE AND ARE DIMENSIONED AS SHOWN.
2. THESE UNITS ARE DESIGNED TO RUN CASE FULL OF FLUID AT ALL TIMES. FILL CASE BEFORE STARTING AND CONNECT DRAIN LINES ACCORDINGLY.
3. NUMERICAL DIMENSIONS GIVEN IN INCHES/[MM].
4. NET WEIGHT- 172 LBS [78 KG] FOR VERSION SHOWN
185 LBS [84 KG] FOR THRU SHAFT VERSION.

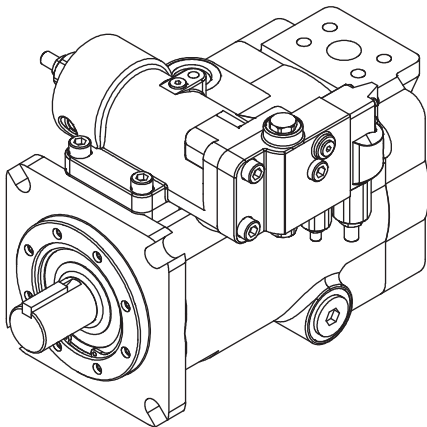

PRESSURE COMPENSATOR ADJUSTMENT
.188" [4.8 mm] INTERNAL HEX
1 TURN CW INCREASES PRESSURE SETTING 1000 PSI.
RANGE: 300 TO 5000 PSI
FACTORY SET AT MINIMUM UNLESS SPECIFIED OTHERWISE.

LOAD SENSE ADJUSTMENT
.188" [4.8 mm] INTERNAL HEX
1 TURN CW INCREASES PRESSURE DIFFERENTIAL 40 PSI
RANGE: 235 TO 750 PSI
FACTORY SET AT 250 ± 25 PSI
UNLESS SPECIFIED OTHERWISE.

FOR BASIC PUMP DIMENSIONS SEE PLANOGRAPHS:
DS-47375, DS-47376

520241-104