



NOTES:


1. PUMPS DESIGNED FOR ONE-WAY SERVICE AND ARE DIMENSIONED AS SHOWN.
2. THESE UNITS ARE DESIGNED TO RUN CASE FULL OF FLUID AT ALL TIMES. FILL CASE BEFORE STARTING AND CONNECT DRAIN LINES ACCORDINGLY.
3. NUMERICAL DIMENSIONS GIVEN IN INCHES/[MM].
4. NET WEIGHT- 132 LBS [56 KG] FOR VERSION SHOWN  
135 LBS [57 KG] FOR SIDE PORT VALVE PLATE  
142 LBS [62 KG] FOR THRU SHAFT VERSION.

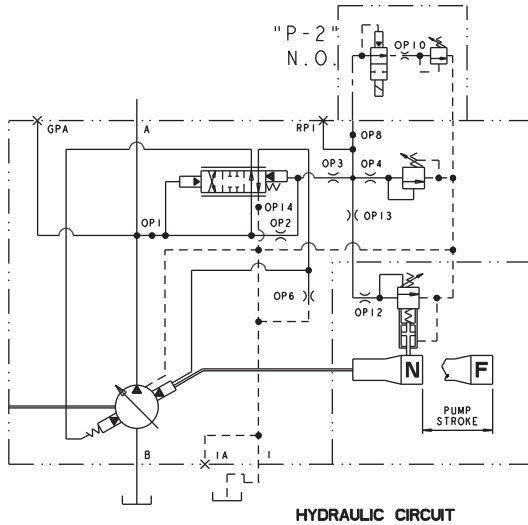

LIFTING HOLE  
.375-16UNC-2B




OPTIONAL MAXIMUM VOLUME STOP  
.250" [6.3 mm] INTERNAL HEX  
1 TURN CW DECREASES DELIVERY 7%  
RANGE: 100% TO 0%  
FACTORY SET TO MAXIMUM VOLUME  
UNLESS SPECIFIED OTHERWISE.

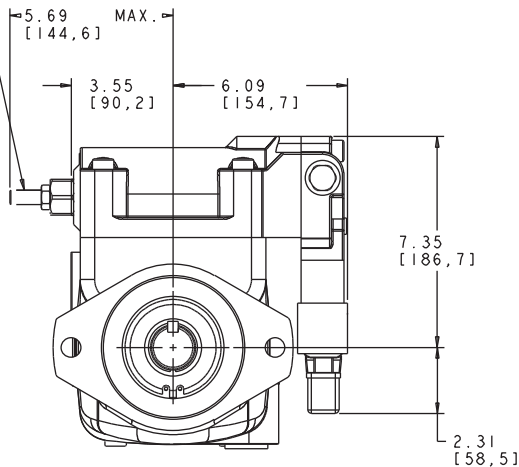

LOW PRESSURE COMPENSATOR ADJUSTMENT  
.188" [4.8 mm] INTERNAL HEX  
1 TURN CW INCREASES PRESSURE SETTING 1000 PSI.  
RANGE: 300 TO 3750 PSI (130) 5000 PSI (100)

HIGH PRESSURE COMPENSATOR ADJUSTMENT  
.188" [4.8 mm] INTERNAL HEX  
1 TURN CW INCREASES PRESSURE SETTING 1000 PSI.  
RANGE: 300 TO 3750 PSI (130) 5000 PSI (100)

HORSEPOWER LIMITER  
ADJUSTER - FACTORY SET

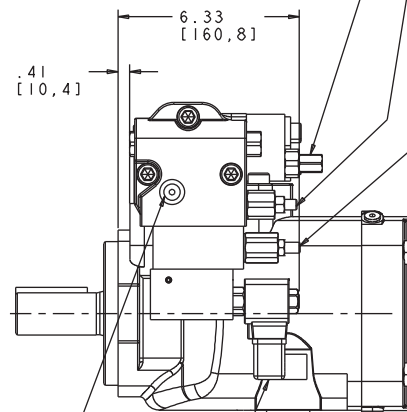

REMOTE PORT RPI-  
#4 SAE STR. THD.  
(PLUGGED)  
(.438-20UNF-2B THD.)

PRESSURE SELECTOR SOLENOID  
DIN 43650 ELECTRICAL CONN.

FOR BASIC PUMP DIMENSIONS  
SEE PLANOGRAPHS:  
DS-47942 DS-47943 DS-47944