




PUMP, VARIABLE DELIVERY PVV-540 "B1" with "P-1NN/H" or "P-C-/H" CONTROL


ENGINEERING

1





Installation Drawing Single Compensator or Soft Start w/Horsepower Limit

PVV-200/250-BIB PUMP
WITH P-1NN/H CONTROL (SHOWN)
AND P-C-/H CONTROL

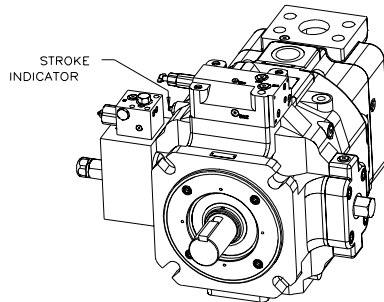


NOTES:


1. PUMPS DESIGNED FOR ONE-WAY SERVICE ARE DIMENSIONED AS SHOWN.
2. THESE UNITS ARE DESIGNED TO RUN CASE FULL OF FLUID AT ALL TIMES. FILL CASE BEFORE STARTING AND CONNECT DRAIN LINES ACCORDINGLY.
3. NUMERICAL DIMENSIONS ARE GIVEN IN MILLIMETERS.
4. NET WEIGHT: P-1NN/H CONTROL
379 KG SIDE PORTED (SHOWN)
354 KG REAR PORTED
P-C-/H CONTROL
383 KG SIDE PORTED
358 KG REAR PORTED
5. FOR BASIC PUMP DIMENSIONS SEE: DS-M47940A
6. LEFTHAND (CCW) VERSION IS SHOWN. FOR RIGHTHAND (CW) VERSION, THE CONTROL CAPS, VOLUME STOPS, AND STROKE INDICATOR WILL BE ON THE OPPOSITE SIDES, ASSUMING THAT THE OUTLET IS ON TOP.
7. FOR HP CONTROLS, "RP" ON THE CONTROL BLOCK IS CONNECTED TO "C" ON THE HP MODULE WITH AN EXTERNAL TUBE.

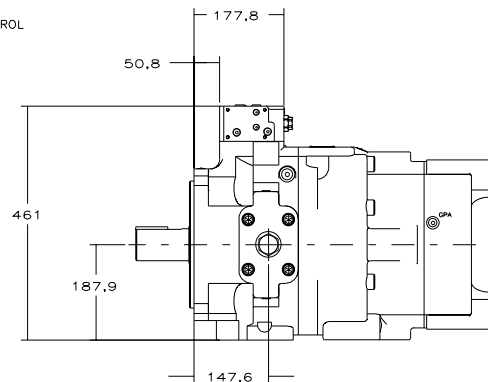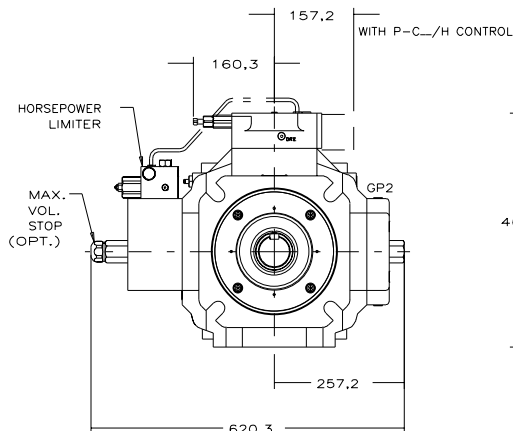

P-1NN/H CONTROL SINGLE PRESSURE COMPENSATOR CONTROL W/ HORSEPOWER LIMITER

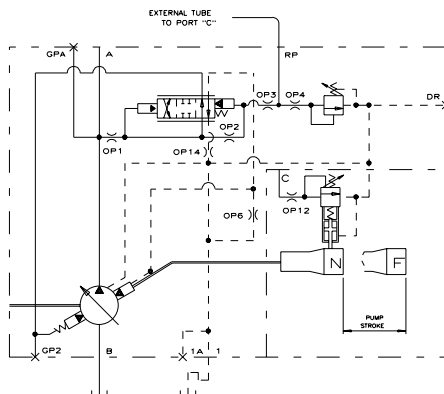

P-C-/H CONTROL SINGLE PRESSURE SOFT STARTING CONTROL W/ HORSEPOWER LIMITER

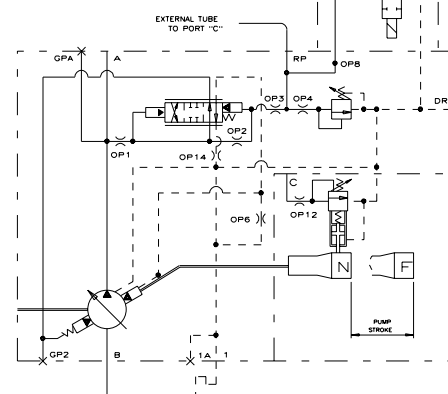

519256-306 sh. 3

Telephone: (414) 327-1700
Fax: (414) 327-0532

OILGEAR
2300 So. 51st. Street
Milwaukee, WI USA 53219

Issued: Oct., 2002
DS-M47512