




PUMP, VARIABLE DELIVERY PVV-540 "B1" with

"P-RNN" or "P-RNN/H" CONTROL


ENGINEERING

1



Installation Drawing Remote Pressure Compensator and Remote w/Horsepower Limit Control



PVV-540-B1B PUMP
WITH P-RNN CONTROL (SHOWN)
AND P-RNN/H CONTROL

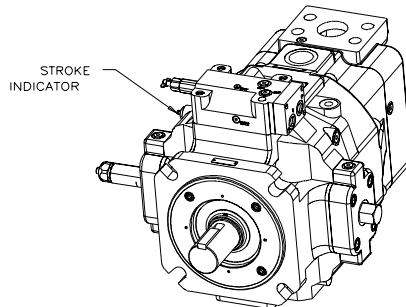


NOTES:

1. PUMPS DESIGNED FOR ONE-WAY SERVICE ARE DIMENSIONED AS SHOWN.
2. THESE UNITS ARE DESIGNED TO RUN CASE FULL OF FLUID AT ALL TIMES. FILL CASE BEFORE STARTING AND CONNECT DRAIN LINES ACCORDINGLY.
3. NUMERICAL DIMENSIONS ARE GIVEN IN MILLIMETERS.
4. NET WEIGHT: P-RNN CONTROL
369 KG SIDE PORTED (SHOWN)
344 KG REAR PORTED


WITH HORSEPOWER LIMITER ADD 11 KG
5. FOR BASIC PUMP DIMENSIONS SEE:
DS-M47940A
6. LEFTHAND (CCW) VERSION IS SHOWN. FOR RIGHTHAND (CW) VERSION, THE CONTROL CAPS, VOLUME STOPS, AND STROKE INDICATOR WILL BE ON THE OPPOSITE SIDES, ASSUMING THAT THE OUTLET IS ON THE TOP.
7. FOR HP CONTROLS, "RP" ON THE CONTROL BLOCK IS CONNECTED TO "C" ON THE HP MODULE WITH AN EXTERNAL TUBE.}

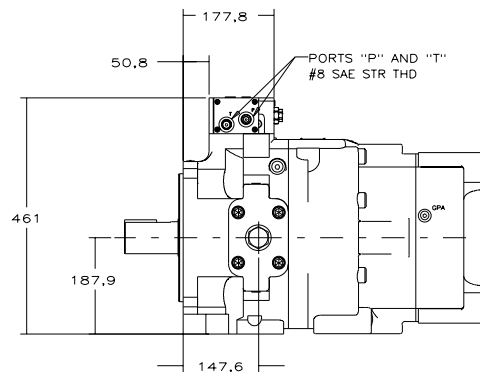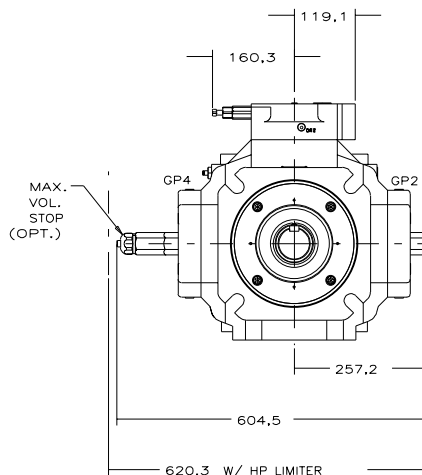

P-RNN CONTROL
REMOTE CONTROL

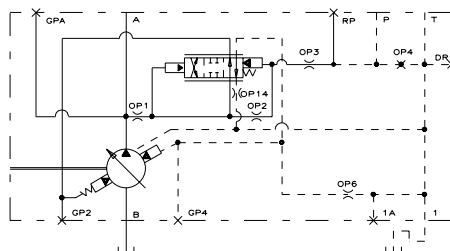

P-RNN/H CONTROL
REMOTE CONTROL W/ HORSEPOWER LIMITER

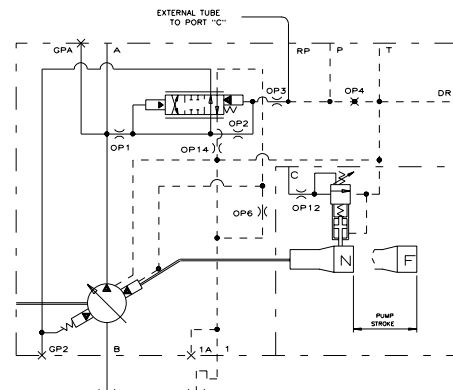

519256-306 sh.11

Telephone: (414) 327-1700
Fax: (414) 327-0532

OILGEAR
2300 So. 51st. Street
Milwaukee, WI USA 53219

Issued: Oct., 2002
DS-M47569