THE WORLD DEMANDS OILGEAR

Installation Drawing

Basic Pump Without Controls - Side Ported

PVWJ 025
WITHOUT CONTROLS

Pump, Variable Delivery

OPTIONAL SAE "B–B" SPLINE SHAFT CODE "C"



VIEW SHOWING OPTIONAL SPLINE SHAFT SAE INVOLUTE SPLINE 15 TEETH 16/32 PITCH .995 [25,27] MAJOR DIA.

OPTIONAL SAE "B" SPLINE SHAFT CODE "S"



VIEW SHOWING OPTIONAL SPLINE SHAFT SAE INVOLUTE SPLINE 13 TEETH 16/32 PITCH .859 [21,82] MAJOR DIA.

OPTIONAL SAE "B" SPLINE SHAFT CODE "D"



VIEW SHOWING OPTIONAL SPLINE SHAFT SAE INVOLUTE SPLINE 13 TEETH 16/32 PITCH .875 [22,23] MAJOR DIA. (INDUSTRIAL VERSION)

OPTIONAL SAE "B–B" KEYED SHAFT CODE "B"



VIEW SHOWING OPTIONAL KEYED SHAFT ø1.000–.001 [25,40–,025] W/ .250 [6,35] SQ. KEY

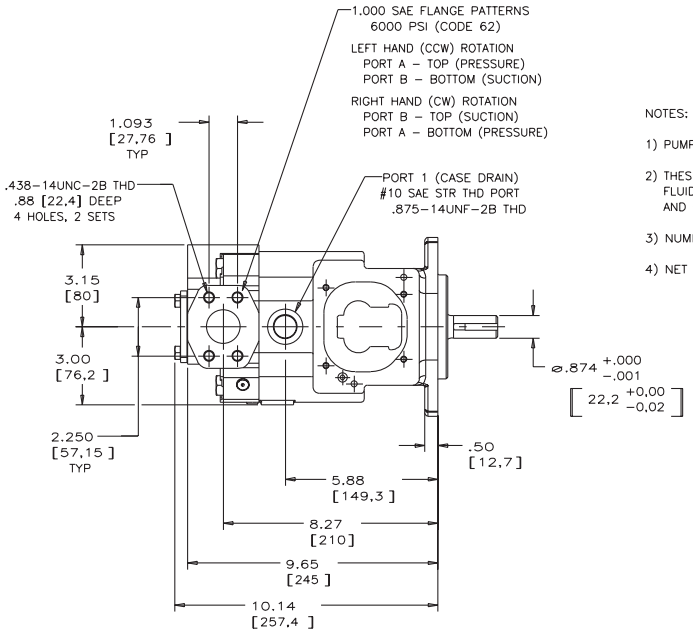

NOTES:

1) PUMPS ARE DESIGNED FOR ONE–WAY SERVICE.

2) THESE UNITS ARE DESIGNED TO RUN CASE FULL OF FLUID AT ALL TIMES. FILL CASE BEFORE STARTING AND CONNECT DRAIN LINES ACCORDINGLY.

3) NUMERICAL DIMENSIONS GIVEN IN INCHES/[MM].

4) NET WEIGHT– 58 LBS. [26,31 KG].

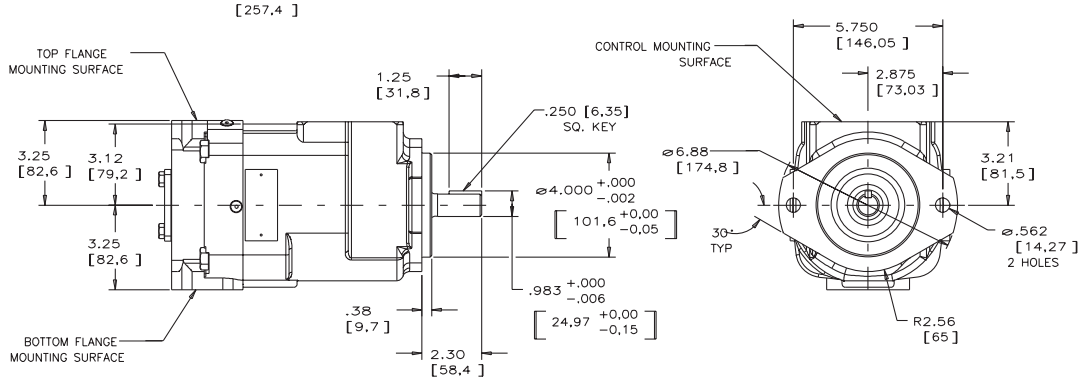

520034-202