

**INDEX TO SCREW-IN  
PRESSURE CONTROL CARTRIDGE VALVES  
(DS 82550 - DS 82790)**

HSLR600 .....	Pilot Adjusters .....	DS-82550-1B
HSLR403-P .....	Relief Valve, Direct Acting .....	DS-82550-B1.1A
HSLR603-P .....	Relief Valve, Direct Acting .....	DS-82550-B2.1A
HSR601-P .....	Relief Valve, Pilot .....	DS-82560-B3.2
HSR802-P .....	Relief Valve, Piloted .....	DS-82560-B3.3
HSRS802-P .....	Relief Valve, Piloted "Spike" .....	DS-82560-B3.35
HSR1201-P .....	Relief Valve, Piloted .....	DS-82560-B3.51
HSR1201 .....	Relief Valve, Pilot Operation .....	DS-82570-B3.5A
HSR1601 .....	Relief Valve, Pilot Operation .....	DS-82570-B3.6
HSR2001 .....	Relief Valve, Pilot Operation .....	DS-82570-B3.7A
HSDPR601 .....	Relief Valve, Differential Pressure .....	DS-82590-B5.1
HSAUR601 .....	Relief Valve, Accumulator Unloading .....	DS-82591-B6.1
HSU1200-DA .....	Sequence Valve, Direct Acting External Operated N.C. ....	DS-82650-B8.4
HSUO1200-DA .....	Sequence Valve, Direct Acting External Operated N.O. ....	DS-82650-B9.4
HSU1600 .....	Sequence Valve, For Pilot Operation Normally Closed .....	DS-82651-B8.5
HSUO1600 .....	Sequence Valve, For Pilot Operation Normally Open .....	DS-82652-B9.5
HSS801-P .....	Sequence Valve, Piloted .....	DS-82660-B7.2
HSUO801-P .....	Sequence Valve, External Pilot Normally Open .....	DS-82662-B9.2
HSS801-RP .....	Sequence Valve, For Pilot Operation .....	DS-82670-B7.4
HSS1201 .....	Sequence Valve, For Pilot Operation .....	DS-82670-B7.5
HSS1600 .....	Sequence Valve, For Pilot Operation .....	DS-82670-B7.6
HSS2000 .....	Sequence Valve, For Pilot Operation .....	DS-82670-B7.7
HSU1201 .....	Sequence Valve, For Pilot Operation, Normally Closed .....	DS-82671-B8.3
HSU2000 .....	Sequence Valve, For Pilot Operation, Normally Closed .....	DS-82671-B8.6
HSUO1201 .....	Sequence Valve, For Pilot Operation, Normally Open .....	DS-82672-B9.3
HSUO2000 .....	Sequence Valve, For Pilot Operation, Normally Open .....	DS-82672-B9.6
HSU801-P .....	Sequence Valve, External Pilot, Normally Closed .....	DS-82681-B8.2
HSUCO800 .....	Sequence Valve, External Pilot Three-Way .....	DS-82690-B10.1
HSPR801-P .....	Pressure Reducing Valve, Piloted Sleeve .....	DS-82760-B13.3
HSRPB1201 .....	Pressure Reducing Valve, Piloted Spool .....	DS-82770-B14.2
HSPRB1601 .....	Pressure Reducing Valve, Piloted Spool .....	DS-82770-B14.3
HSPRR801-P .....	Pressure Reducing & Releiving Valve .....	DS-82790-B15.1


## HSLR600

### Pilot Circuits

#### Data Sheet

#### Pilot Adjustors

### Pilot Operator Circuits

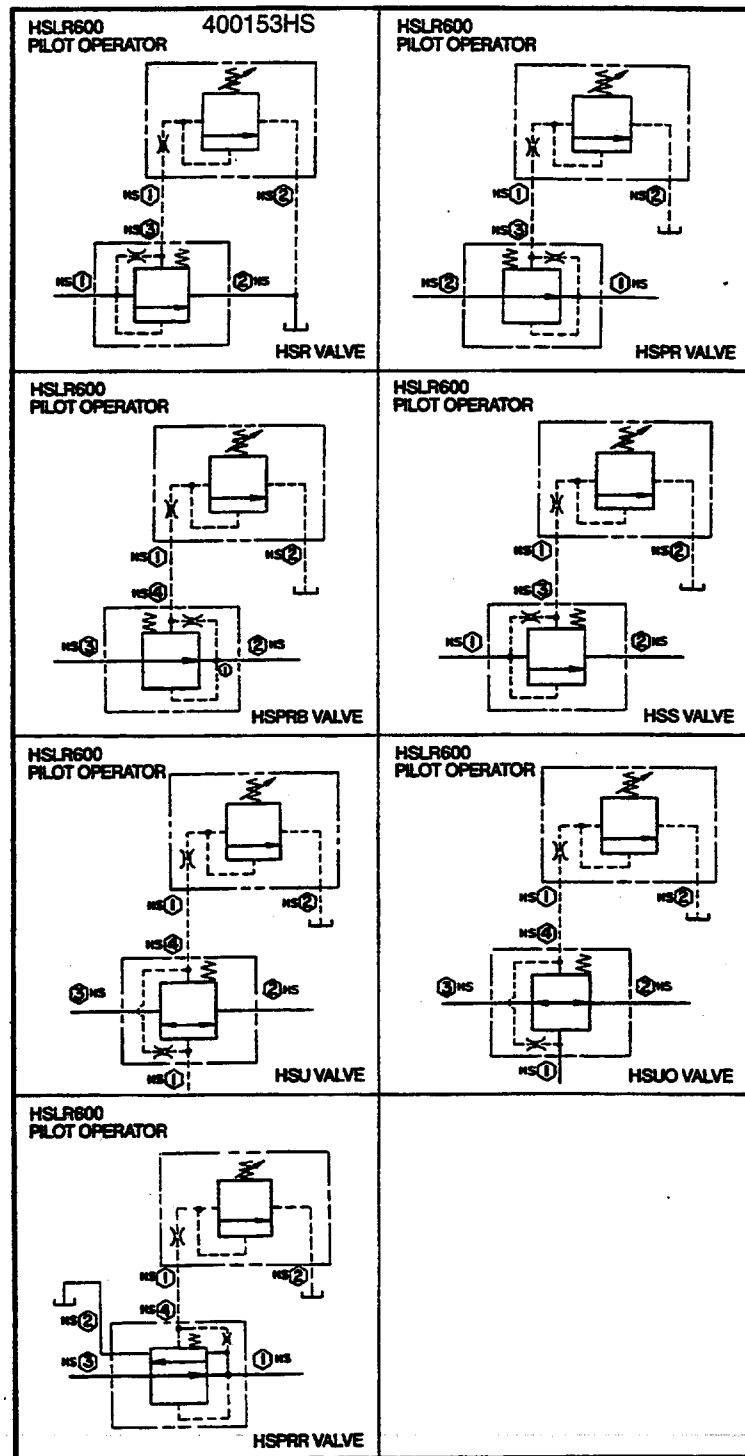

### Application

For increased sensitivity, smoothness of operation, broadness of range and ease of adjustments, many times it is advantageous to use a smaller (pilot) relief valve to operate a large pressure control valve. (See DS 82550-B1.1 & DS 82550-B2.1A for information on the HSLR403-P & HSLR602-P pilot valves).

### Operation

The compound ASA symbols shown are for pilot operated pressure control valves. That is—they show both the pilot valve and the larger pressure control valve.

### Features


HSLR relief valves are available with several pressure adjusters. The standard knob, tamper resistant option, tamper proof option and internal adjuster option are shown on the reverse side of this sheet.

## HSLR600


Pilot Circuits

Data Sheet


Pilot Adjustors

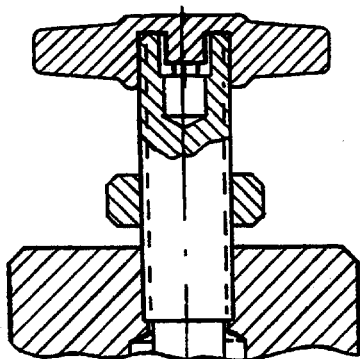


Standard Knob

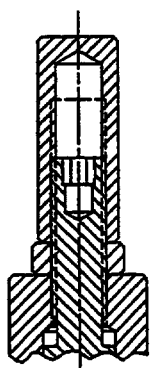

TR  
Tamper Resistant Option

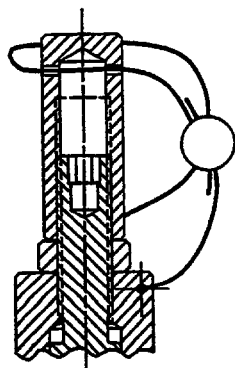


TP  
Tamper Proof Option




I  
Internal Adjustor Option

## HSLR403-P



### Data Sheet

### Relief Valve, Direct Acting

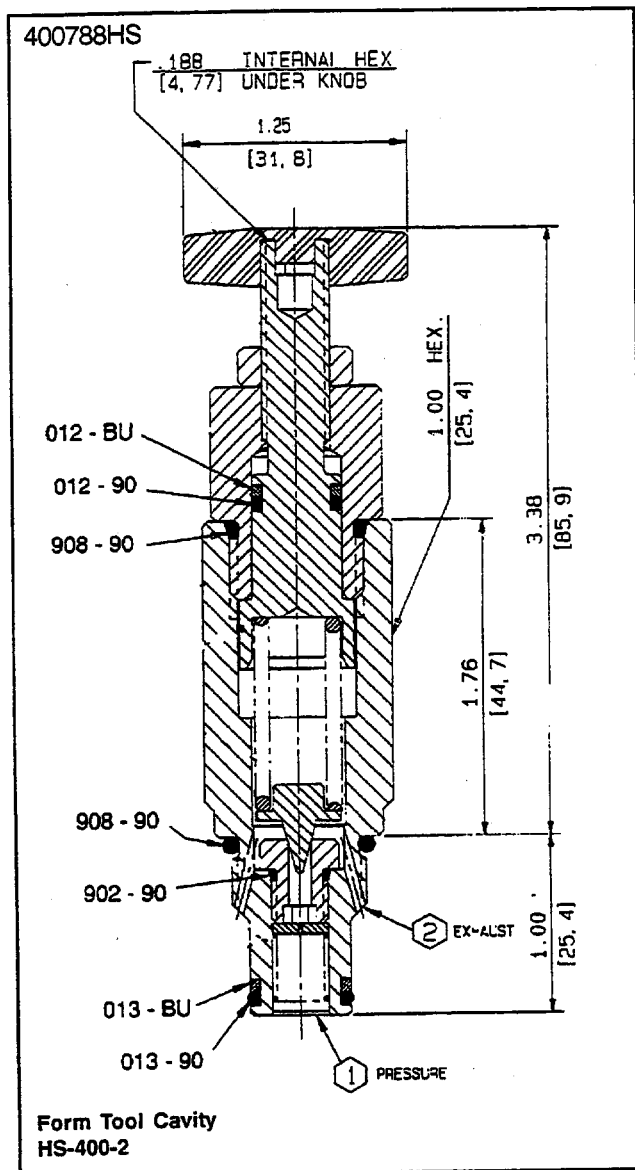

### Application

The HSLR is a flow adjustable relief valve used for pilot control of relief, pressure reducing, sequence, or any other type of pressure control valve.

### Operation

Inlet pressure (at port 1) passes thru a stability orifice in the center of the valve. When pressure on the exposed face of the poppet exceeds that of the adjustable spring tension, holding the poppet on the seat, the valve opens and allows flow from port 1 to port 2. When pressure drops, the poppet re-seats and flow stops.

### Features


HSLR relief valves are available with several orifice sizes and springs so you can tailor the valve to your needs. The cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for ease of service or field repair. Available with tamper resistant or tamper proof adjusting screws.

### Specifications

Rated flow to — 2.5 gpm (9.45 lpm)  
 Maximum operating pressure—  
 5000 psi (345 bar)  
 Adjustable pressure range — Depends on  
 pressure range selected — see How to Order  
 Maximum shut-off leakage at rated  
 pressure — 3 drops per minute  
 Viscosity range — 27-300 SSU at 100°F  
 35-2000 SSU at 100°F  
 Seal—Viton  
 Operating temperature— -40°F to 350°F  
 (-39.6°C to 175°C)  
 Filtration — Maintain SAE Class 6, ISO 18/15  
 Seal kit — HSSK-400-A



## HSLR403-P



Data Sheet

Relief Valve, Direct Acting

### How To Order

#### Screw-In Cartridge Only

HSLR403-P - \_\_\_\_\_


Pressure Range		
	psi	bar
07	50-700	3,4-48,0
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345

Orifice Diameter		
	in.	mm
0	No. disk	No. disk
2	.026	0,66
3	.032	0,81
4	.040	1,02
5	.055	1,40
6	.062	1,57

Option	
Blank	None
TR	Tamper resistant
TP- * _ _ _	Tamper proof
I- _ _ _ _	Internal Adj.


\*Tamper proof to be specified as "TP——" (followed by the pressure the valve is to be set at while passing the full allowable volume thru the specified orifice). Use "0000", when the valve is to be furnished with loose wire and seal, so valve can be set in the field.

## HSLR603-P



### Data Sheet

### Relief Valve, Direct Acting

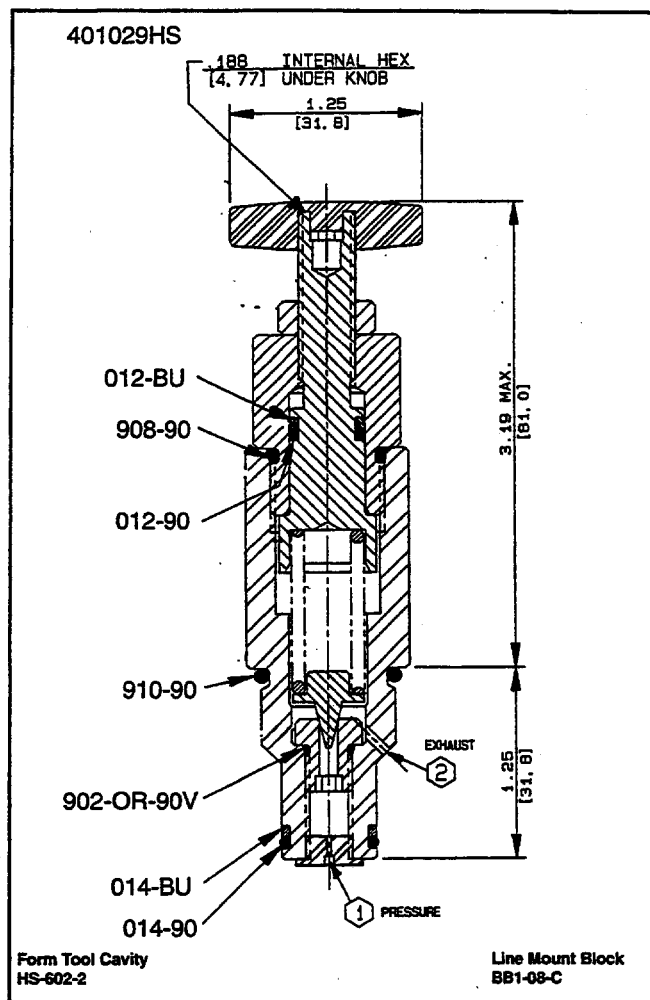

### Application

The HSLR is a low flow adjustable relief valve used for pilot control of relief, pressure reducing, sequence, or any other type of pressure controlled valve.

### Operation

Inlet pressure (at port 1) passes thru a stability orifice in the center of the valve. When pressure on the exposed face of the poppet exceeds that of the adjustable spring tension, holding the poppet on the seat, the valve opens and allows flow from port 1 to port 2. When pressure drops, the poppet re-seats and flow stops.


### Features

HSLR relief valves are available with several orifice sizes and springs so you can tailor the valve to your needs. The cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for ease of service or field repairs. Available with tamper resistant or tamper proof adjusting screws.

### Specifications

Rated flow to—2.5 gpm (9.45 lpm)  
 Maximum operating pressure—  
 5000 psi (345 bar)  
 Adjustable pressure range—Depends on  
 pressure range selected—see How to Order  
 Maximum shut-off leakage at rated  
 pressure—3 drops per minute  
 Viscosity range—27-30 SSU at 100°F  
 35-2000 SSU at 100°F  
 Seals—Viton  
 Operating temperature—-40°F to 350°F  
 (-39.6°C to 175°C)  
 Filtration—Maintain SAE Class 6, ISO 18/15  
 Seal kit—HSSK-600-D

## HSLR603-P




Data Sheet

Relief Valve, Direct Acting

### Line Mount Specifications

HSLR603-P/BB1-08-C

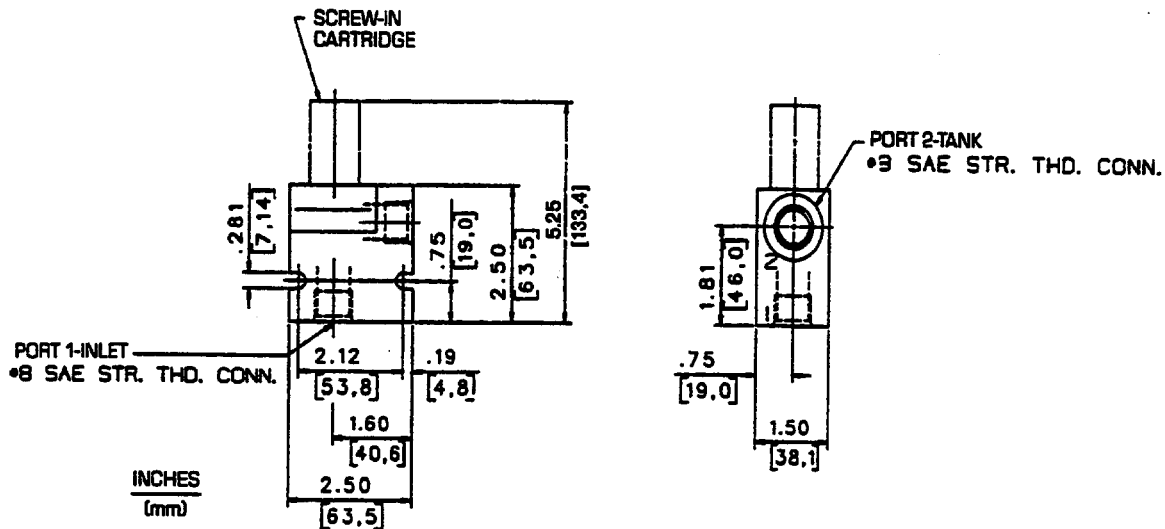

## How To Order

### Screw-In Cartridge Only

HSLR603-P - - - - -

	Pressure Range	
	psi	bar
07	50-700	3,4-48,0
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345

	Orifice Diameter	
	in.	mm
0	No. disk	No. disk
3	.032	0,81
4	.040	1,02
5	.055	1,40
6	.062	1,57

see DS 82550-1B

Option	
Blank	None
TR	Tamper resistant
TP- - - -	Tamper proof
I -	Internal Adj.


\*Tamper proof option to be specified as "TP- - - -" (followed by the pressure the valve is to be set at while passing the full allowable volume thru the specified orifice). Use "0000;" when the valve is to be furnished with loose wire and seal, so valve can be set in the field.

### Cartridge With Line Mount Block

HSLR603-P - - - /BB1-08-C

10 USGPM  $\Delta$ 100 PSI  
(37,9 LPM  $\Delta$ 6,9 Bar)


### HSR601-P



#### Data Sheet

#### Pilot Relief Valve

401020HS

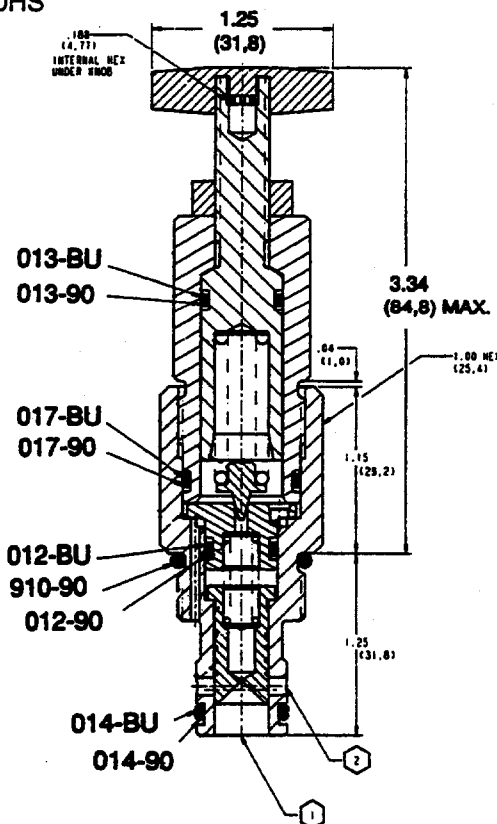

Form Tool Cavity  
HS-600-2

Line Mount Block  
BB1-08-C

### Application

The HSR pilot relief valve is a fast acting valve designed for continuous duty applications to regulate system maximum pressure consistently and smoothly.

### Operation

Inlet pressure is ported thru orifices in the center of the valve to the adjustable pilot relief valve (in upper portion of body). When inlet pressure exceeds this valve (spring) setting, the poppet opens and pressure on top side of the (lower) main spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the main spool to allow flow to port 2.


### Features

The HSR Cartridge Valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service and field repair.

### Specifications


- Rated flow - 10 USgpm (37,9 lpm)
- Maximum operating pressure - 5000 psi (345 bar)
- Adjustable pressure range - Depends on pressure range selected - see How To Order
- Viscosity range - 27-2000 SSU at 100°F
- Seals - Viton
- Operating temperature - 40°F to 350°F (-39,6°C to 175°C)
- Filtration - Maintain SAE Class 6, ISO 18/15
- Seal kit - HSSK-600-AM

### Performance Curve

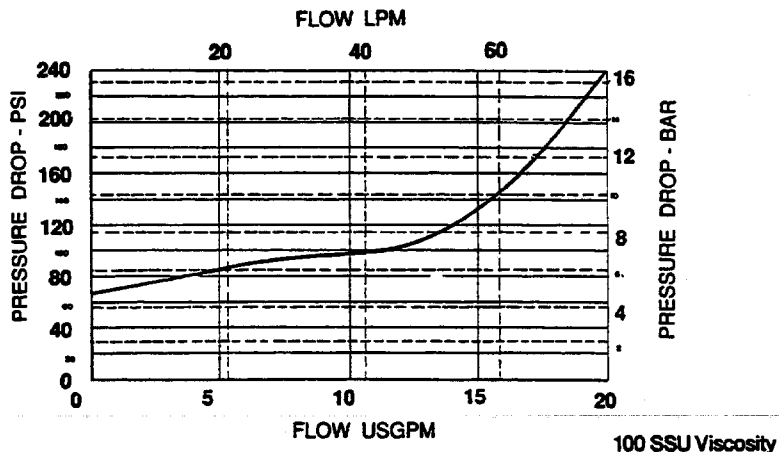

10 USGPM  $\Delta$ 100 PSI  
(37,9 LPM  $\Delta$ 6,9 Bar)

### HSR601-P




#### Data Sheet

#### Pilot Relief Valve

### Line Mount Specifications

HSR601-P/BB1-08-C

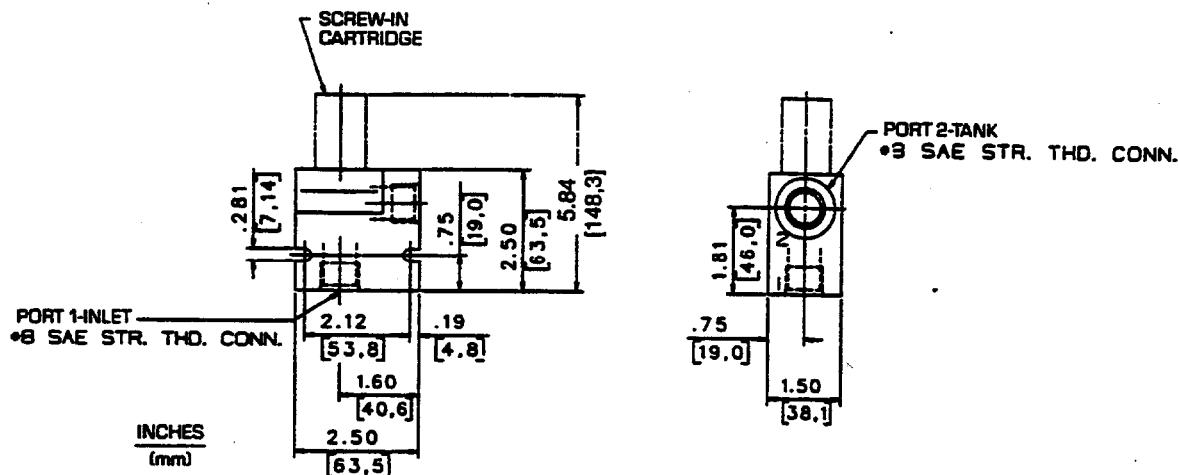

## How To Order

### Screw-In Cartridge Only


HSR601-P-

	Pressure Range	
	psi	bar
07	50-700	3,4 - 48,0
20	50-2000	3,4 - 138,0
35	50-3500	3,4 - 241,0
50	50-5000	3,4 - 345,0

### Cartridge With Line Mount Block


HSR601-P-\_/BB1-08-C

### Performance Curves

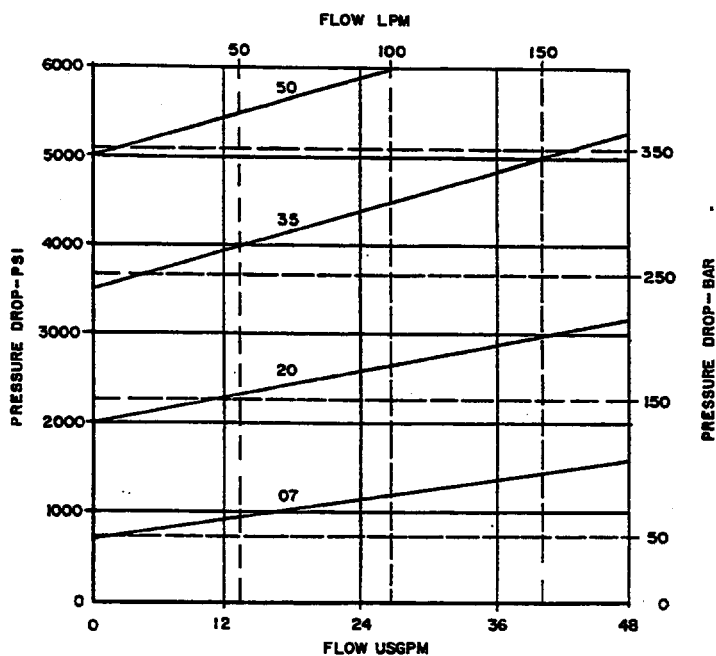

35 USGPM  $\Delta$  100 PSI  
(132,7 LPM  $\Delta$  6,9 Bar)


### HSR802-P



#### Data Sheet

#### Piloted Relief Valve

400789HS

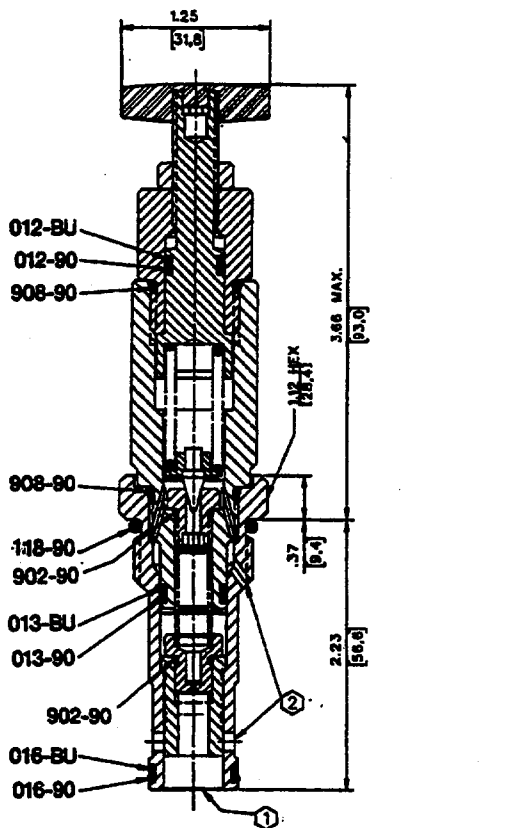

#### Application

The HSR piloted relief valve is a fast acting valve designed for continuous duty applications to regulate system maximum pressure consistently and smoothly.

#### Operation

Inlet pressure is ported thru orifices in the center of the valve to the adjustable pilot relief valve (in upper portion of body). When inlet pressure exceeds this valve setting, pressure on top side of main spool is relieved, a pressure imbalance then exists (across the main spool) and port 1 pressure raises the main spool to allow flow to Port 2.

#### Features

HSR Cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service and field repair.

#### Specifications

Rated flow—35 USgpm (132,7 lpm)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—Depends on  
pressure range selected—see How to Order

Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F


Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15


Seal kit—HSSK-800-E

#### Performance Curves

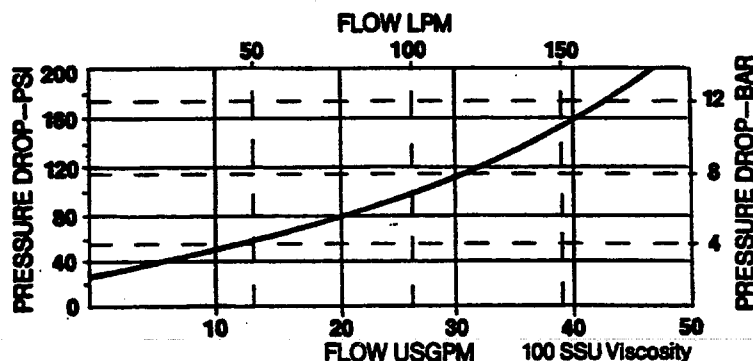

35USGPM  $\Delta$  100PSI  
(132,7 LPM  $\Delta$  6,9 Bar)

### HSR802-P




#### Data Sheet

#### Piloted Relief Valve

#### Line Mount Specifications

HSR802-P/CF1-10-C

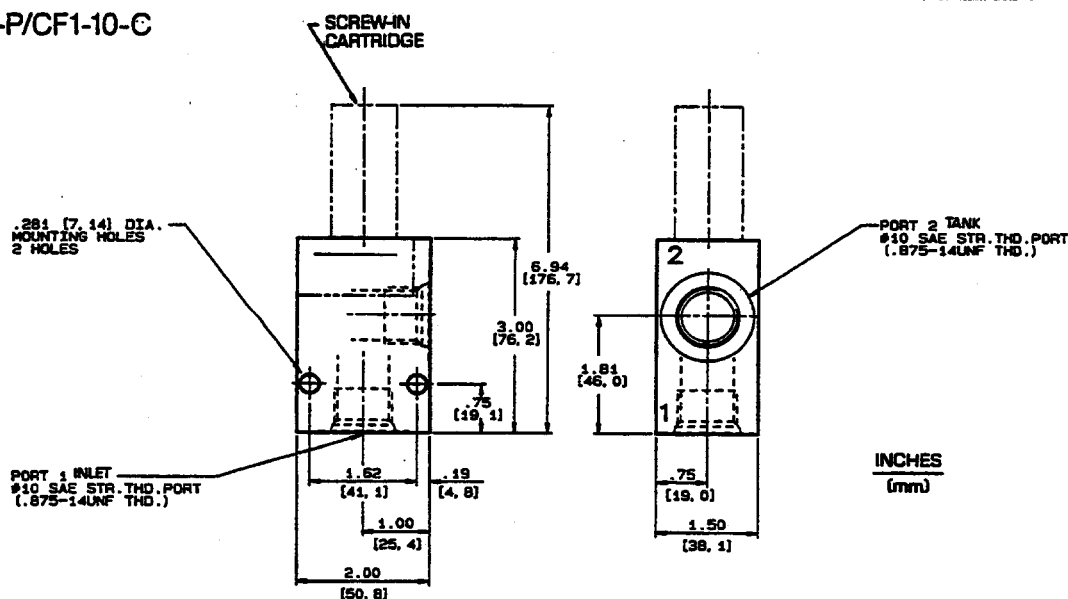

INCHES  
(mm)

## How To Order

### Screw-In Cartridge Only

HSR802-P-\_\_\_\_\_


NOTE: All adjusting screw options on DS 82550-1B are available for this valve.

	Pressure Range	
	psi	bar
07	50- 700	3,5-48,0
20	50-2000	3,5-241,0
35	50-3500	3,5-241,0
50	50-5000	3,5-345,0

### Cartridge With Line Mount Block


HSR802-P-\_\_\_\_\_/CF1-10-C

### Performance Curves

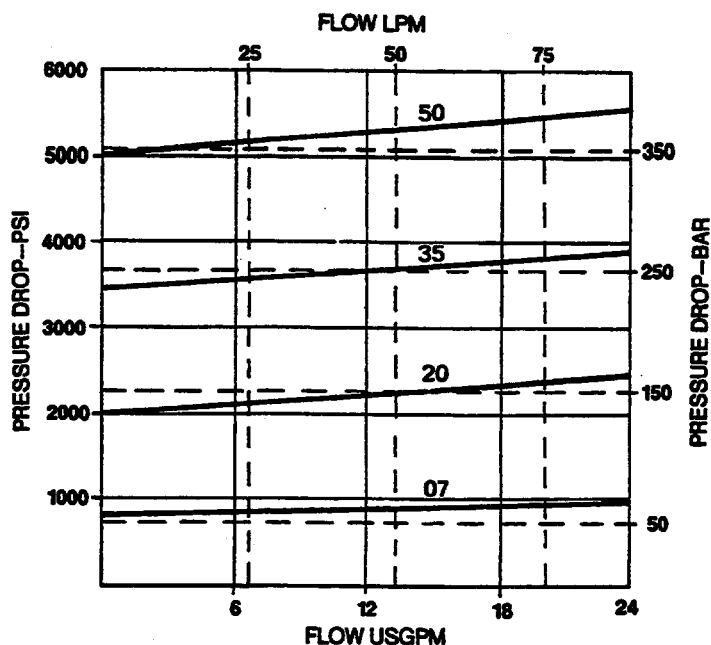

35 USGPM  $\Delta$  100 PSI  
(132,7 LPM  $\Delta$  6,9 Bar)

## HSRS802-P



### Data Sheet

### Piloted "Spike" Relief Valve

400911HS

188 INTERNAL HEX  
[4,77] UNDER KNOB

012-BU

012-90

908-90

908-90

018-90

902-90

013-BU

013-90

902-90

016-BU

016-90

Form Tool Cavity  
HSR-800-2

Line Mount Block  
CF1-10-C

### Application

The HSRS piloted relief valve is a fast acting valve designed to prevent high pressure spikes, that can occur with slower acting valves, and regulate system maximum pressure consistently.

### Operation

Inlet pressure is ported thru an orifice (lower, main spool) to the pilot relief valve (in upper portion of body). When inlet pressure exceeds the pilot valve setting, pressure on top side of main spool is relieved. A pressure imbalance then exists (across the main spool) and Port 1 pressure raises the main spool to allow flow to Port 2.

### Features

HSRS cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service and field repair.

### Specifications

Rated flow - 35 USgpm (137,9 lpm)

Maximum operating pressure -  
5000 psi (345 bar)

Adjustable pressure range - Depends on  
pressure range

selected - see How To Order

Viscosity range - 27-2000 SSU at 100°F

Seals - Viton


Operating temperature - 40°F to 350°F

(-39,6°C to 175°C)

Filtration - Maintain SAE Class 6, ISO 18/15

Seal kit - HSSK-800-E


### Performance Curves

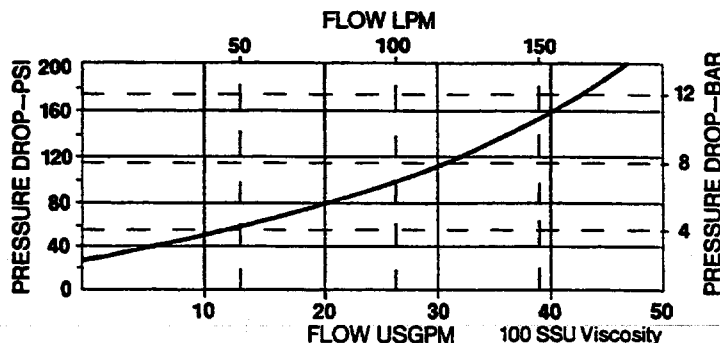



35 USGPM  $\Delta$  100 PSI  
(132,7 LPM  $\Delta$  6,9 Bar)

### HSRS802-P




#### Data Sheet

#### Piloted "Spike" Relief Valve

#### Line Mount Specifications

HSRS802-P/CF1-10-C

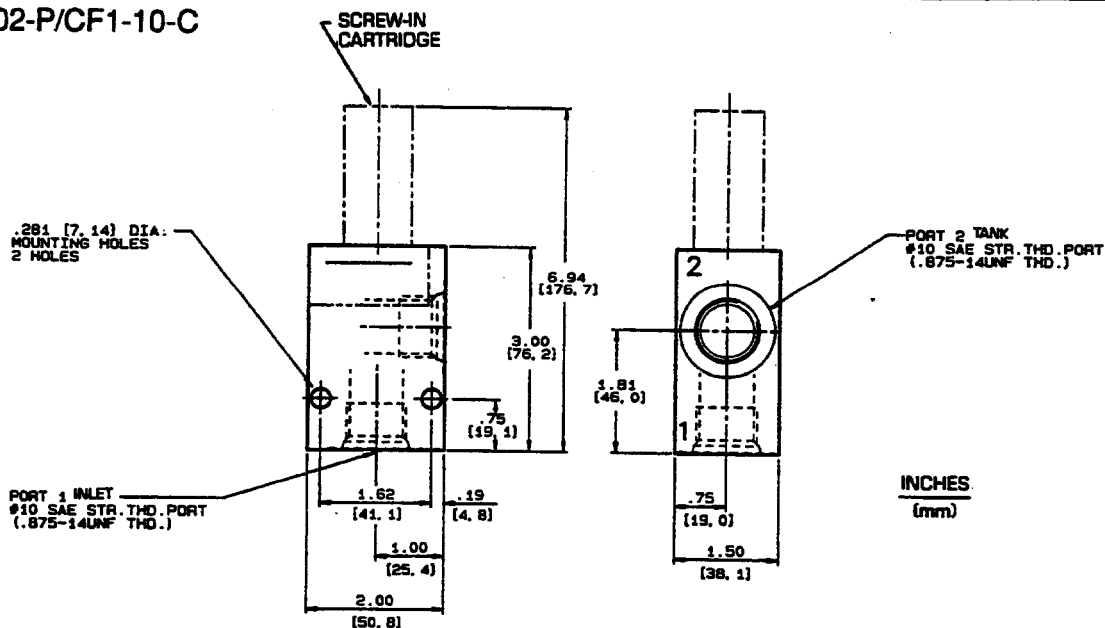

#### How To Order


#### Screw-In Cartridge Only

HSRS802-P-

Adjuster Options -  
see - DS 82550-1B

	PRESSURE RANGE	
	psi	bar
07	50-700	3,5-48,0
20	50-2000	3,5-138,0
35	50-3500	3,5-241,0
50	50-5000	3,5-345,0

#### Performance Curves

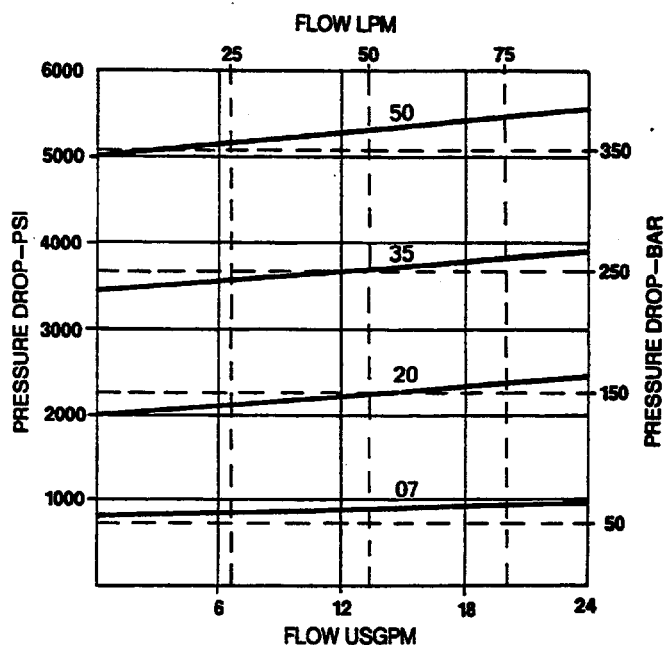


#### Cartridge With Line Mount Block

HSRS802-P-\_\_\_/CF1-10-C

35 USGPM  $\Delta$  100 PSI  
(132 LPM  $\Delta$  6,9 Bar)


### HSR1201-P



Data Sheet

Piloted Relief Valve

400863HS

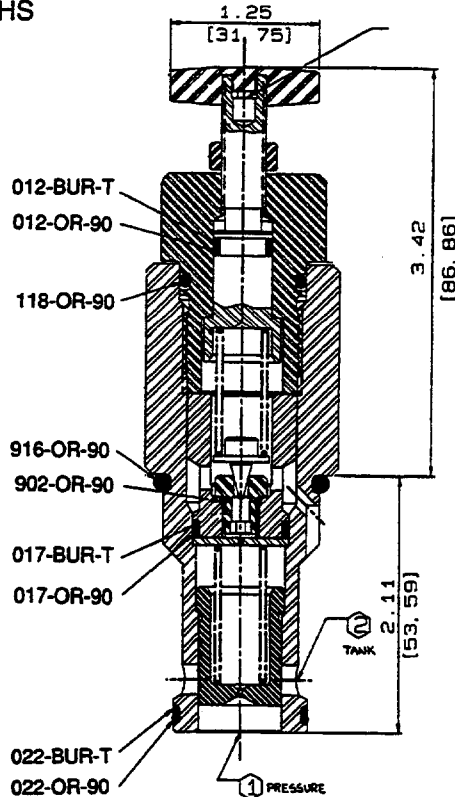

Form Tool Cavity  
HS-1200-3

Line Mounted Block  
DR1-16-C

### Application

The HSR piloted relief valve is a fast acting valve designed for continuous duty applications to regulate system maximum pressure consistently and smoothly.

### Operation

Inlet pressure is ported thru orifices in the center of the valve to the adjustable pilot relief valve (in upper portion of body). When inlet pressure exceeds this valve setting, pressure on top side of main spool is relieved, a pressure imbalance then exists (across the main spool) and port 1 pressure raises the main spool to allow flow to port 2.

### Features

HSR Cartridge Valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service and field repair.

### Specifications

Rated flow to - 35 US gpm (132 lpm)

Maximum operating pressure -  
5000 psi (345 bar)

Adjustable pressure range - Depends on pres-

sure range selected - see How To Order

Viscosity range - 27-2000 SSU at 100°F


Seals - Viton

Operating temperature -40°F to 350°F  
(-39,6°C to 175°C)

Filtration Maintain SAE Class 6, ISO 18/5

Seal Kit - HSSK-1200-P

### Performance Curves

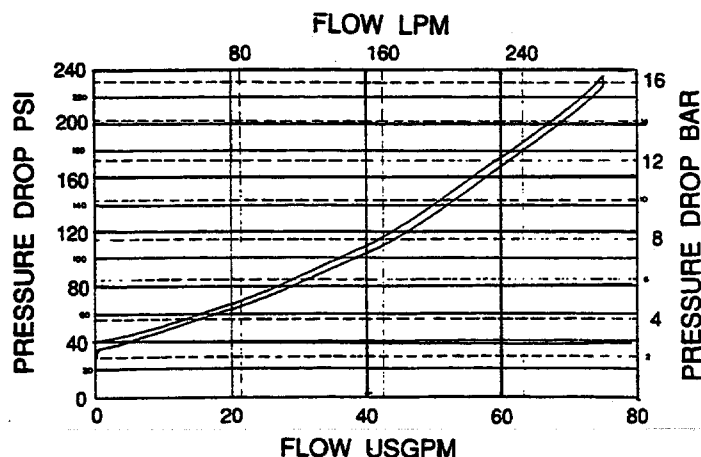




## VALVE, SCREW-IN CARTRIDGE

35 USGPM  $\Delta$  100 PSI  
(132 LPM  $\Delta$  6,9 Bar)

### HSR1201-P

ENGINEERING

2




Data Sheet

Piloted Relief Valve

### Line Mounted Specifications

HSR1201-P/DR1-16-C

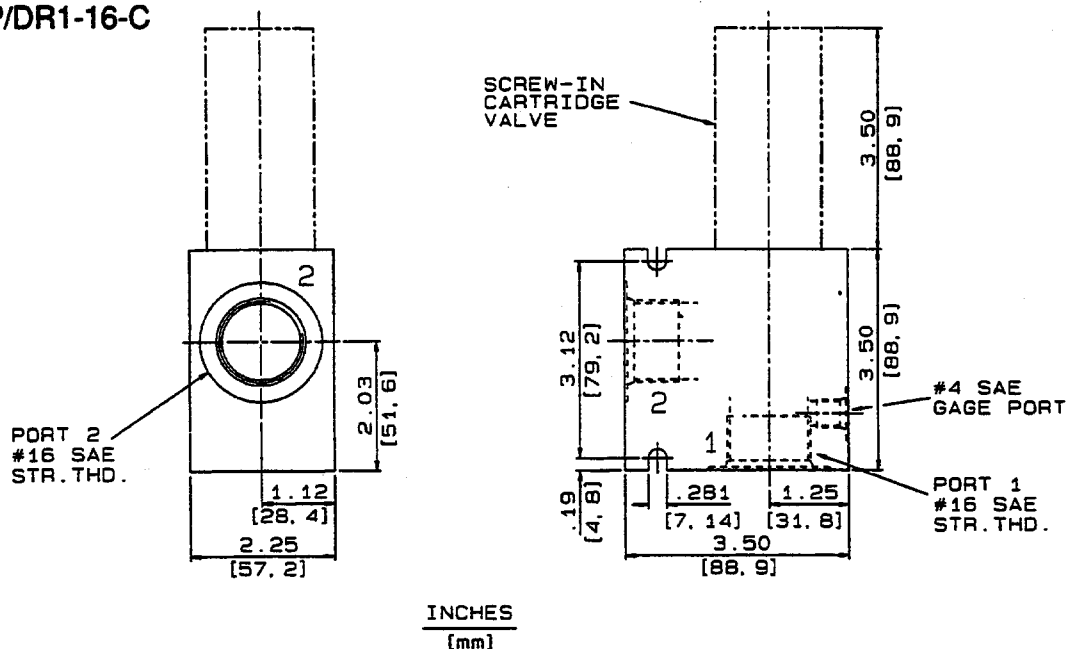

## How To Order

### Screw-In Cartridge Only

HSR1201-P-

			OPTIONS	
			TP	Tamper Proof
			TR	Tamper Resistant
			Blank	Non Req.d.
	Pressure PSI	Range Bar		
07	100 - 700	6,9 - 48,0		
20	100 - 2000	6,9 - 138,0		
35	100 - 3500	6,9 - 241,0		
50	100 - 5000	6,9 - 345,0		

NOTE: All adjusting screw  
options on DS-82550-1B  
are available for this valve

### Cartridge With Line Mount Block

HSR1201-P-\_-\_-/DR1-16-C

Reissued: Nov., 1995


DS 82560-B3.51

OILGEAR  
2300 So. 51st. Street  
Milwaukee, WI USA 53219

Telephone: (414) 327-1700  
Fax: (414) 327-0532

62 USGPM  $\Delta$  100 PSI  
(235 LPM  $\Delta$  6,9 Bar)


### HSR1201



#### Data Sheet

#### Relief Valve For Pilot Operation

400348HS

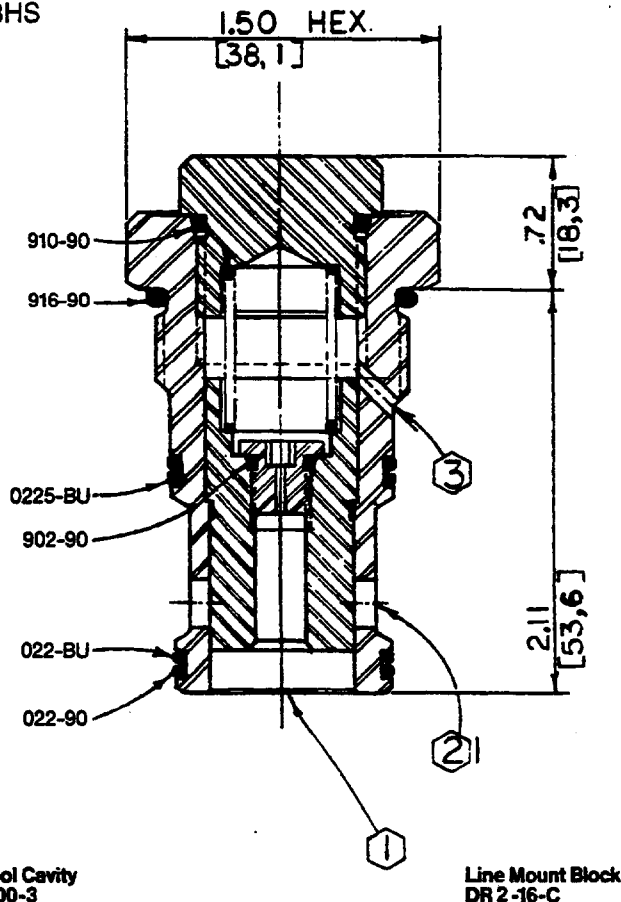

#### Application

This HSR cartridge is a fast acting relief valve when controlled by a HSLR pilot operator. The cartridge is designed for continuous duty applications to regulate system maximum pressure continuously and smoothly.

#### Operation

A HSLR pilot relief valve must be connected via port 3 to top (spring side) of the main spool. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2.


#### Features

HSR cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridges are designed for easy service or field repair. Multiple pressure ranges, proportional pressure, and vent operation are available thru use of standard pilot control modules.

#### Specifications


Rated flow to—62 USgpm (235,0 lpm)  
Maximum operating pressure—  
5000 psi (345 bar)  
Adjustable pressure range—Depends on  
pressure range selected—see HSLR  
Pilot Valve, DS 82550-B2.1A  
Seals—Viton  
Operating temperature— -40°F to 350°F  
(-39,6°C to 175°C)  
Filtration—Maintain SAE Class 6, ISO 18/15  
Seal kit—HSSK-1200-C

#### Performance Curves

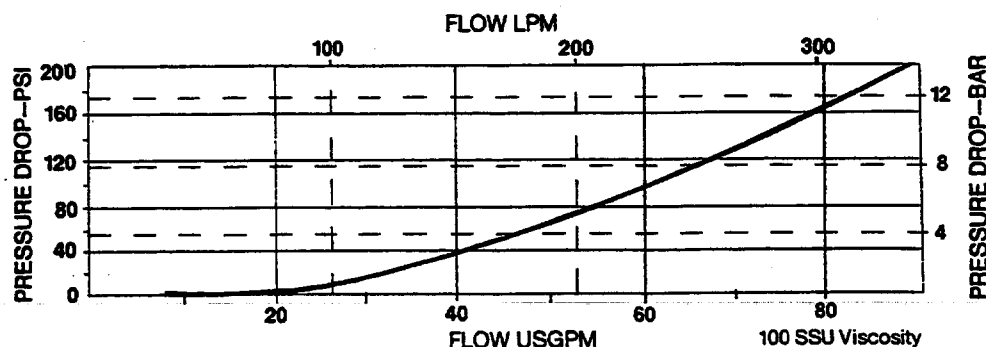

62 USGPM  $\Delta$  100 PSI  
(235 LPM  $\Delta$  6,9 Bar)

### HSR1201




#### Data Sheet

#### Relief Valve For Pilot Operation

#### Line Mount Specifications

HSR1201/DR2-16-C

WHEN ADDITIONAL HSPCM MODULES ARE REQUIRED, THIS PLUG MUST BE REMOVED.

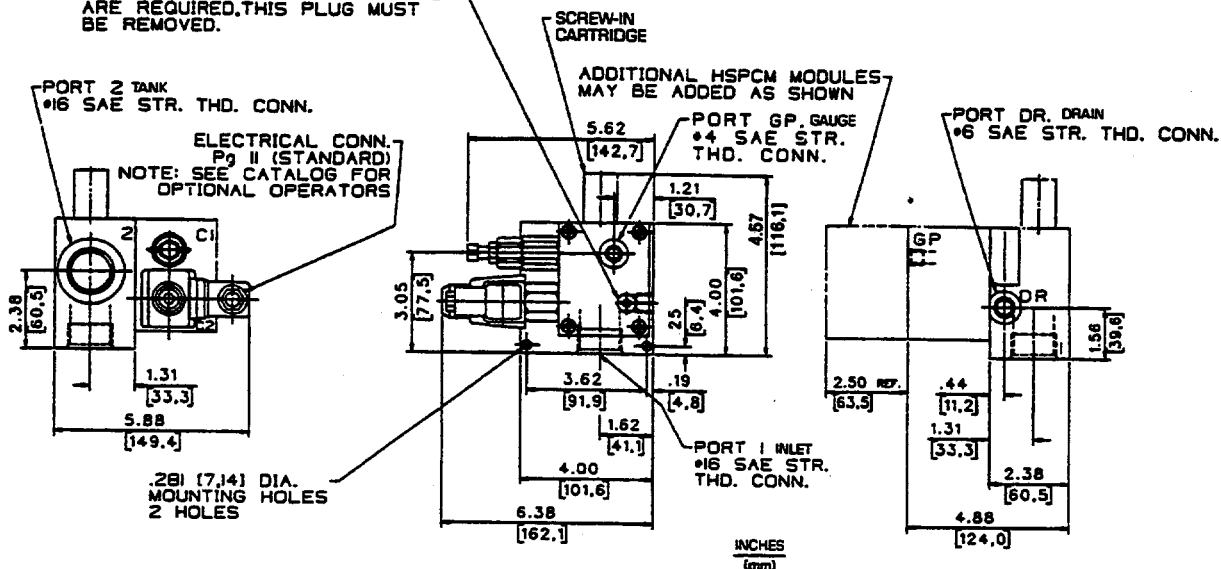

## How To Order


### Screw-In Cartridge Only

HSR1201

### Cartridge With Line Mount Block


HSR1201/DR2-16-C \*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

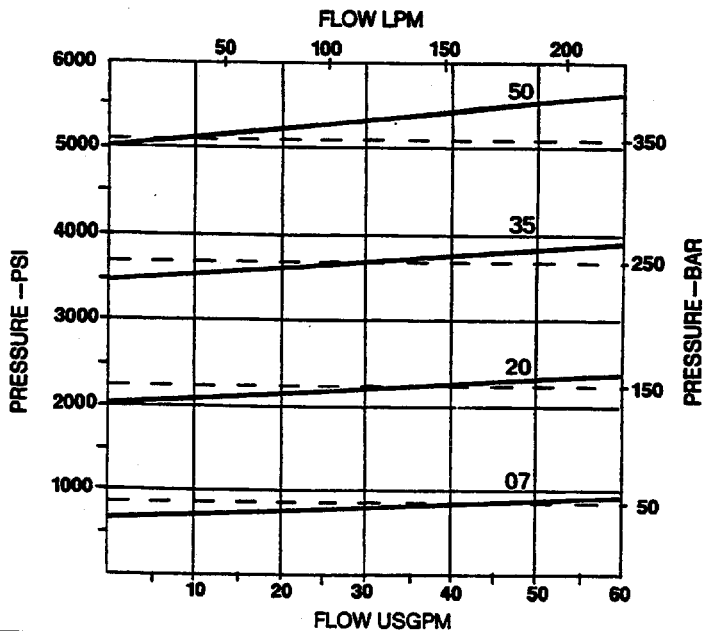

62 USGPM  $\Delta$  100 PSI  
(235 LPM  $\Delta$  6,9 Bar)

### HSR1201



#### Data Sheet


#### Relief Valve For Pilot Operation

### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.


### Typical HSR1201 How To Order Example

HSR1201 / DR2-16-C / 1-35-4-C / Optional

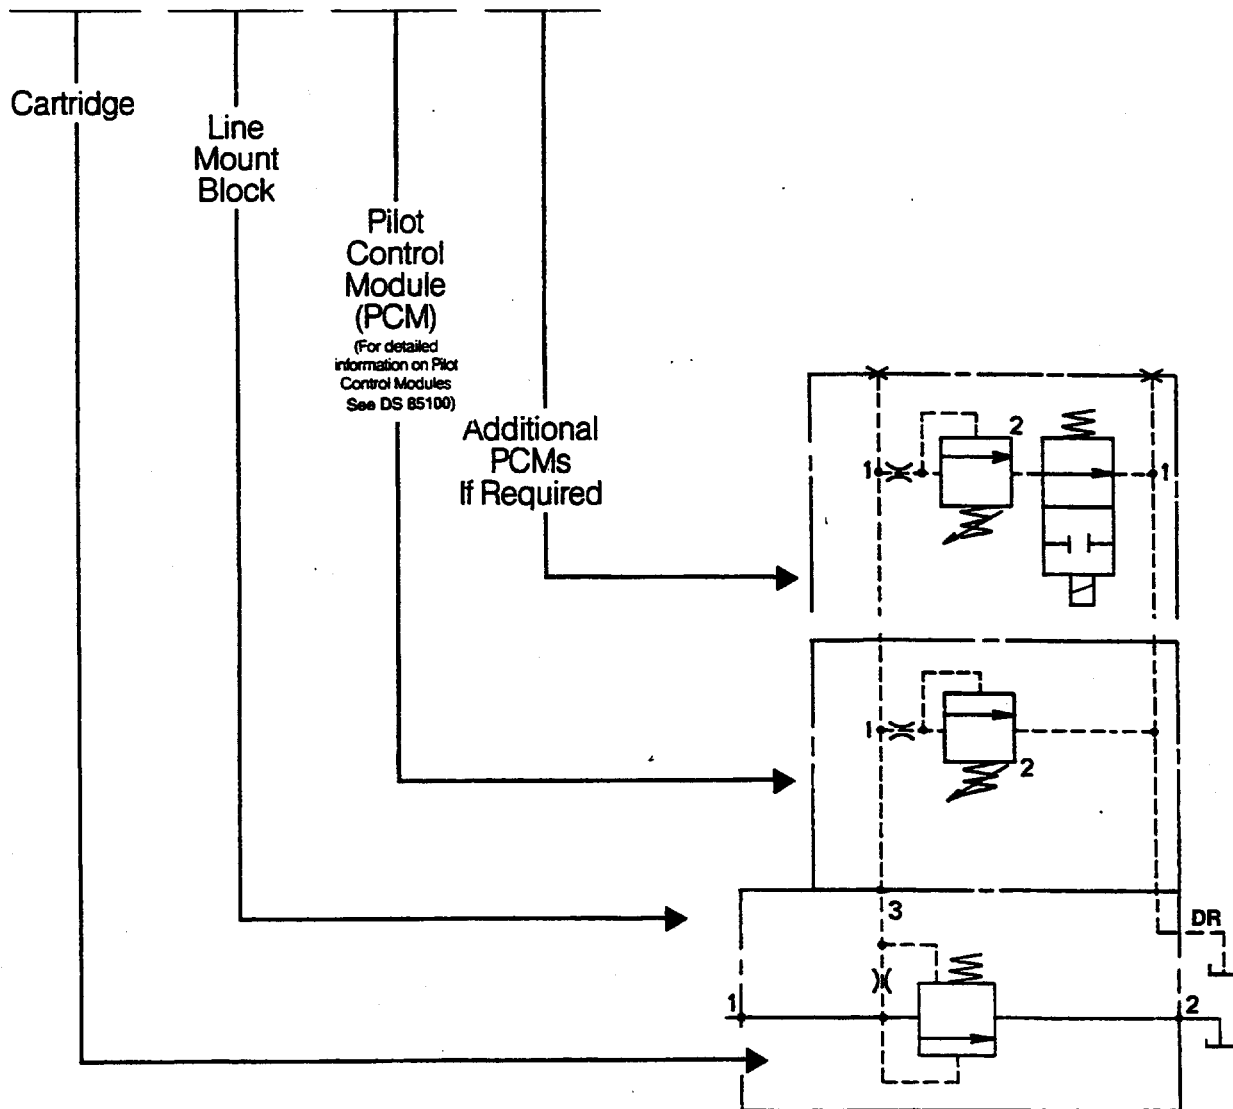

62 USGPM  $\Delta$  100 PSI  
(235 LPM  $\Delta$  6,9 Bar)

### HSR1201



#### Data Sheet


#### Relief Valve For Pilot Operation

### How To Order


#### Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C


#### PCM Code

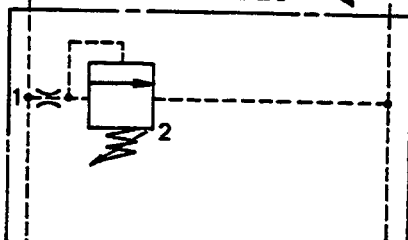


PCM Code 1

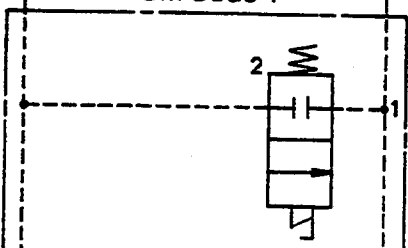


PCM Code 2

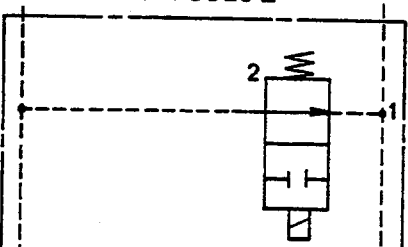

PCM Code 20

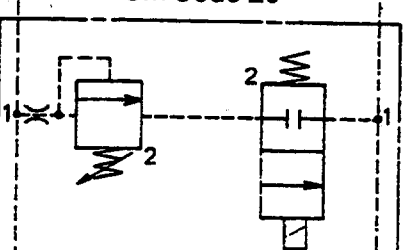

PCM Code 3

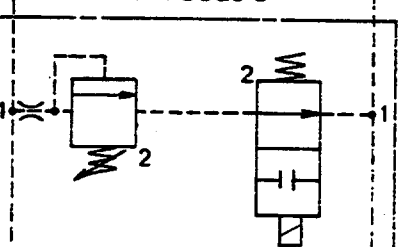

PCM Code 30

#### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

#### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for  
special applications

#### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

#### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650  
connector w/mating plug


#### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information  
on pilot controls.

112 USGPM  $\Delta$  100 PSI  
(424,5 LPM  $\Delta$  6,9 Bar)


### HSR1601



#### Data Sheet

#### Relief Valve For Pilot Operation

400795HS

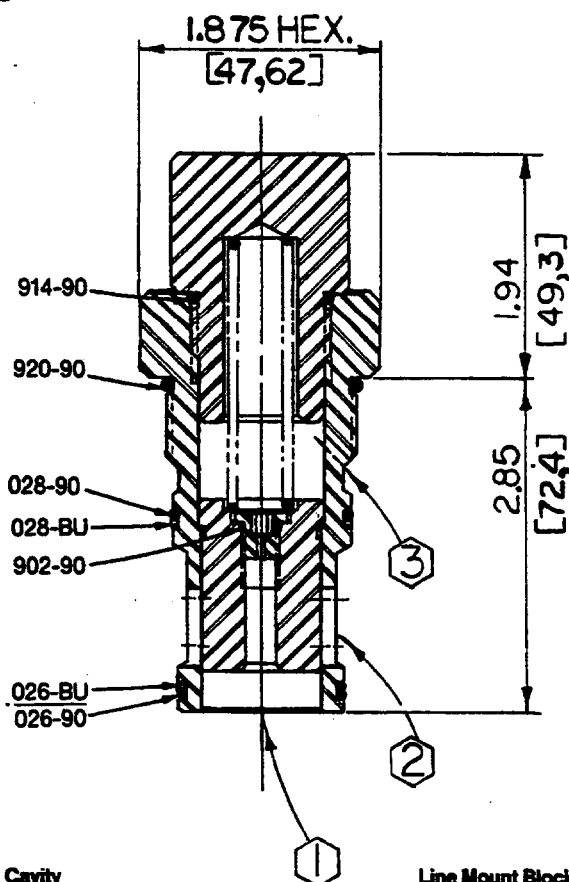

Form Tool Cavity  
HS-1600-3

Line Mount Block  
3000 psi = EV1-24-C  
5000 psi = EV1-66-C

### Application

This HSR cartridge is a fast acting relief valve when controlled by a HSLR pilot operator. The cartridge is designed for continuous duty applications to regulate system maximum pressure continuously and smoothly.

### Operation

A HSLR pilot relief valve must be connected via port 3 to top (spring side) of the main spool. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2.

### Features

HSR cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridges are designed for easy service or field repair. Multiple pressure ranges, proportional pressure, and vent operation are available thru use of standard pilot control modules.

### Specifications

Rated flow to—112 USgpm (424,5 lpm)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—Depends on  
pressure range selected—see HSLR  
Pilot Valve, DS 82550-B2.1A


Seals—Viton

Operating temperature— -40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15

Seal kit—HSSK-1600-C


### Performance Curve

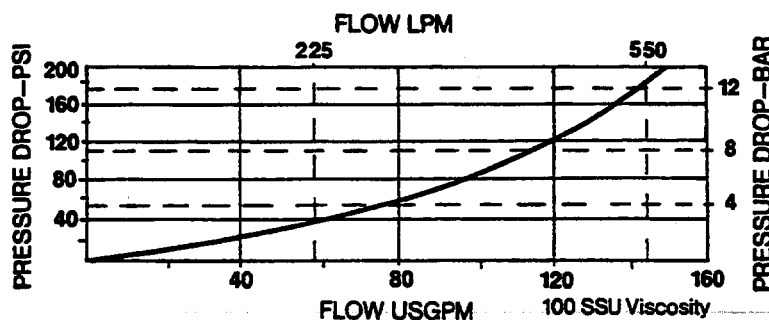



112 USGPM  $\Delta$  100 PSI  
(424,5 LPM  $\Delta$  6,9 Bar)

### HSR1601




#### Data Sheet


#### Relief Valve For Pilot Operation

#### Line Mount Specifications


##### HSR1601/EV1-24-C

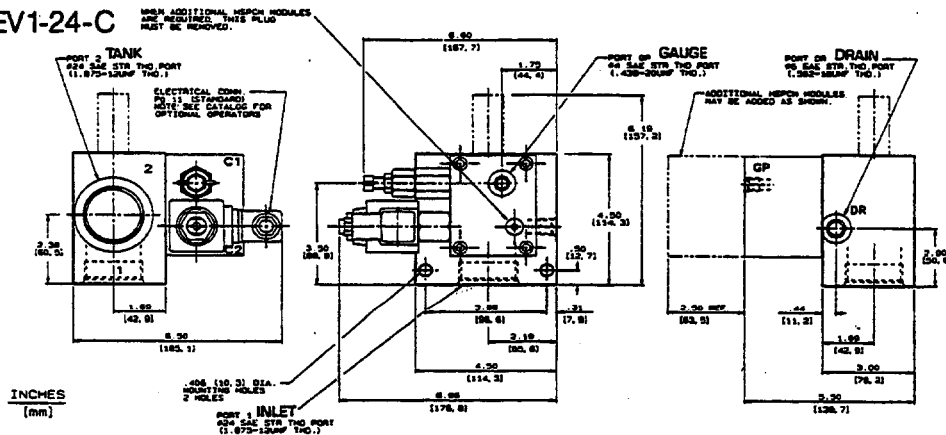

##### HSR1601/EV1-66-C

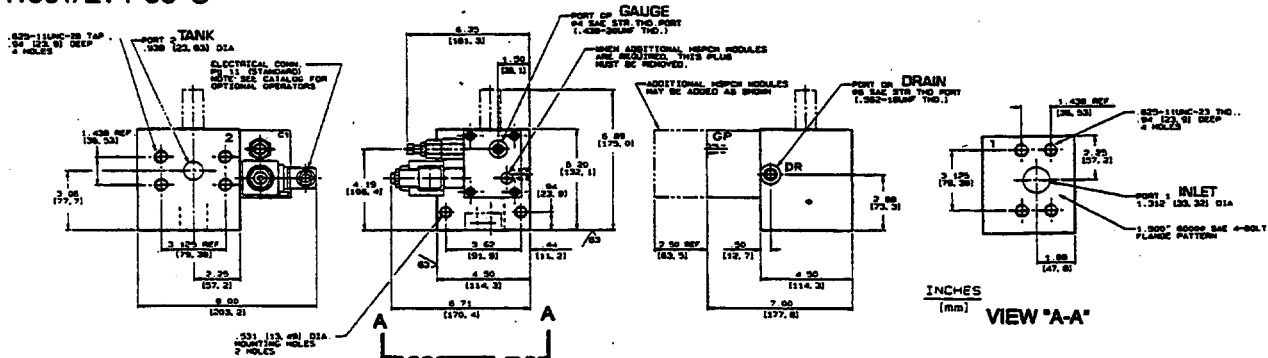

#### Performance Curve

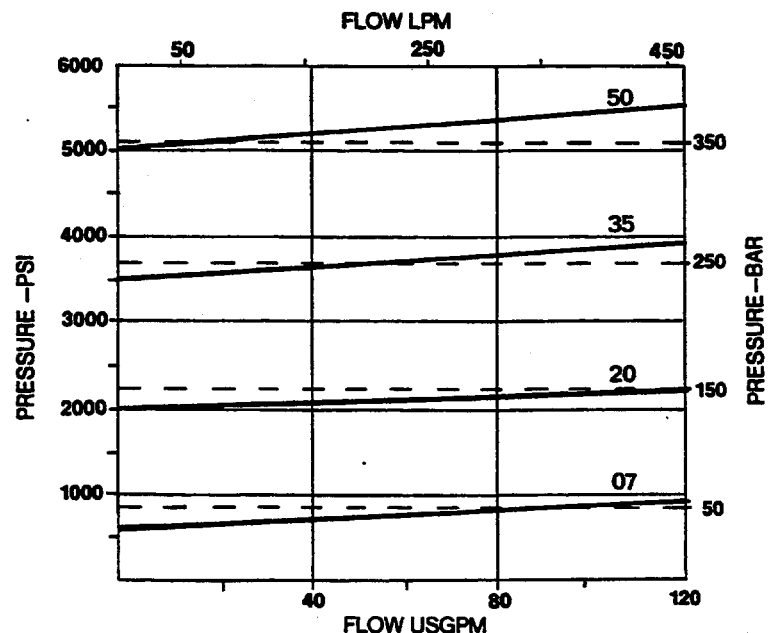

#### How To Order

##### Screw-In Cartridge Only

HSR1601

##### Cartridge With Line Mount Block


3000 psi (207 bar) service pressure  
HSR1601/EV1-24-C\*

5000 psi (345 bar) service pressure  
HSR1601/EV1-66-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

112 USGPM  $\Delta$  100 PSI  
(424,5 LPM  $\Delta$  6,9 Bar)

### HSR1601



#### Data Sheet


#### Relief Valve For Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.


#### Typical HSR1601 How To Order Example

HSR1601 / EV1-24-C / 1-35-4-C / Optional

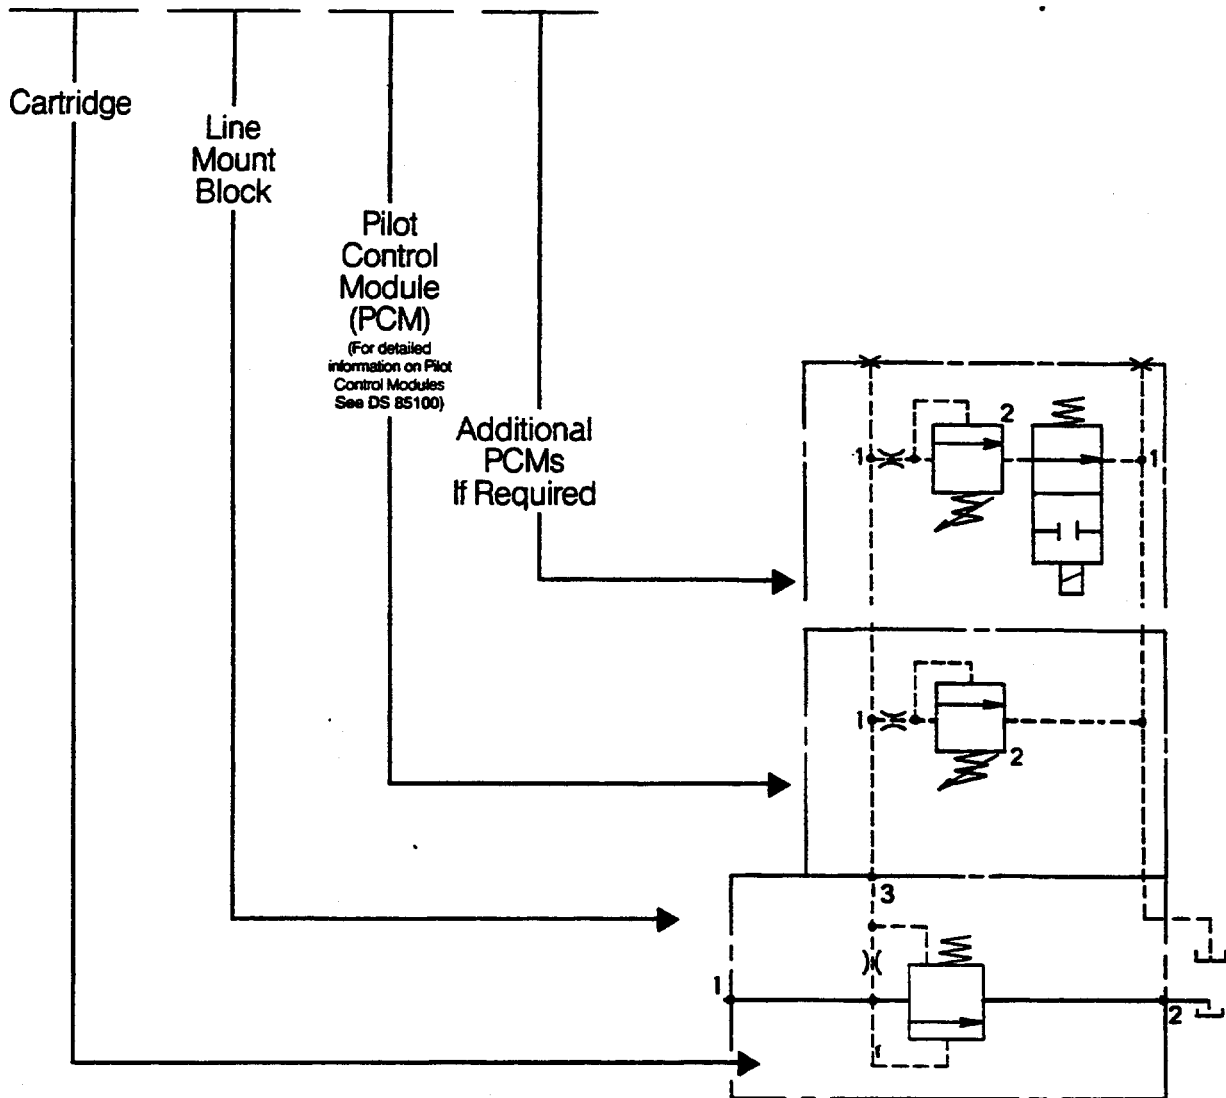

112 USGPM  $\Delta$  100 PSI  
(424,5 LPM  $\Delta$  6,9 Bar)

### HSR1601




Data Sheet

Relief Valve For Pilot Operation


## How To Order

Typical PCM How To Order Example:


/30 - 35 - 4 - 0W - C

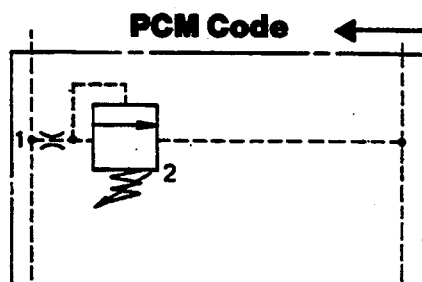


PCM Code 1

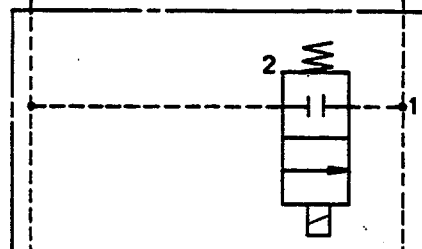


PCM Code 2

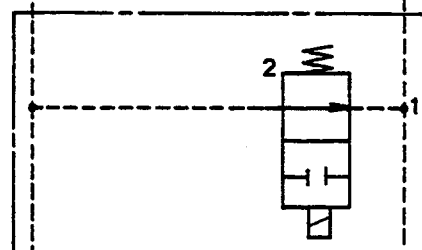

PCM Code 20

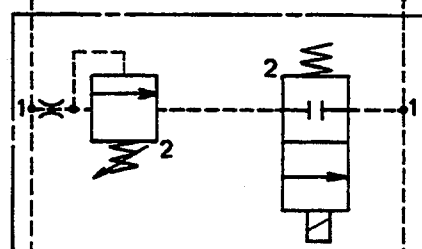

PCM Code 3

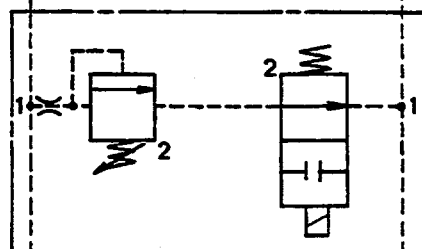

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for  
special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid  
Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650  
connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information  
on pilot controls.

220 USGPM  $\Delta$  100 PSI  
(833,8 LPM  $\Delta$  6,9 Bar)


### HSR2001



#### Data Sheet

#### Relief Valve for Pilot Operation

400796HS

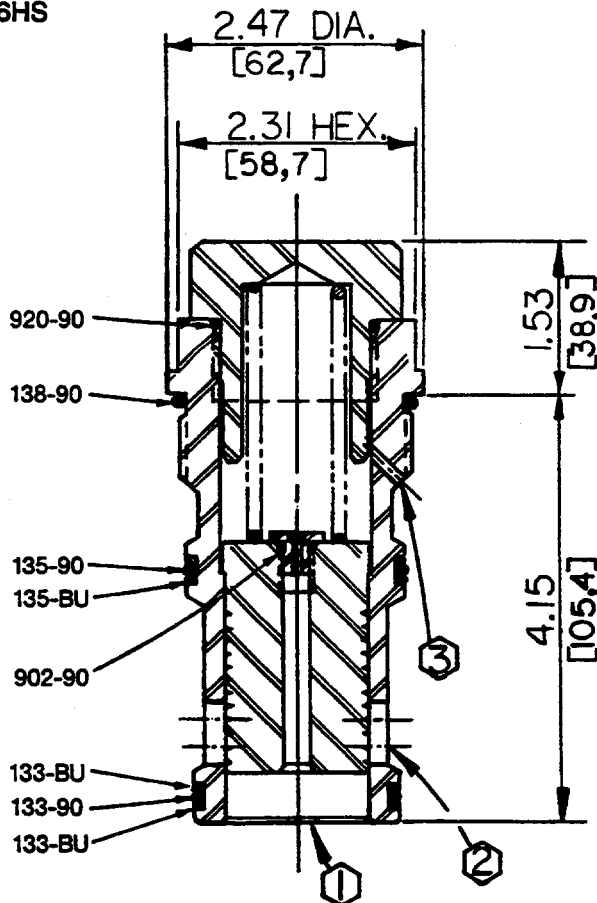

Form Tool Cavity  
HS-2000-3

Line Mount Block  
3000 psi = FY2-38-C  
5000 psi = FY1-68-C

#### Application

This HSR cartridge is a fast acting relief valve when controlled by a HSLR pilot operator. The cartridge is designed for continuous duty applications to regulate system maximum pressure continuously and smoothly.

#### Operation

A HSLR pilot relief valve must be connected via port 3 to top (spring side) of the main spool. When inlet pressure (ported through the valve) exceeds the pilot is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2.

#### Features

HSR cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridges are designed for easy service or field repair. Multiple pressure ranges, proportional pressure, and vent operation are available thru use of standard pilot control modules.

#### Specifications

Rated flow to—220 USgpm (833,8 lpm)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—Depends on  
pressure range selected—see HSLR  
Pilot Valve, DS 82550-B2.1A


Seals—Viton

Operating temperature— -40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15


Seal kit—HSSK-1600-C

#### Performance Curve

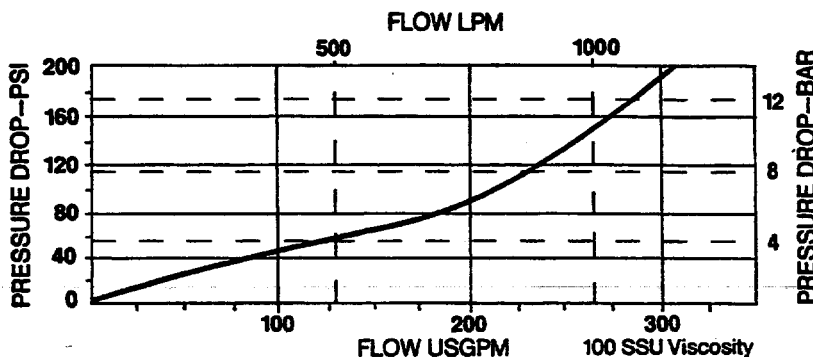

220 USGPM  $\Delta$  100 PSI  
(833,8 LPM  $\Delta$  6,9 Bar)

### HSR2001




#### Data Sheet


#### Relief Valve for Pilot Operation

#### Line Mount Specifications

##### HSR2001/FY2-38-C

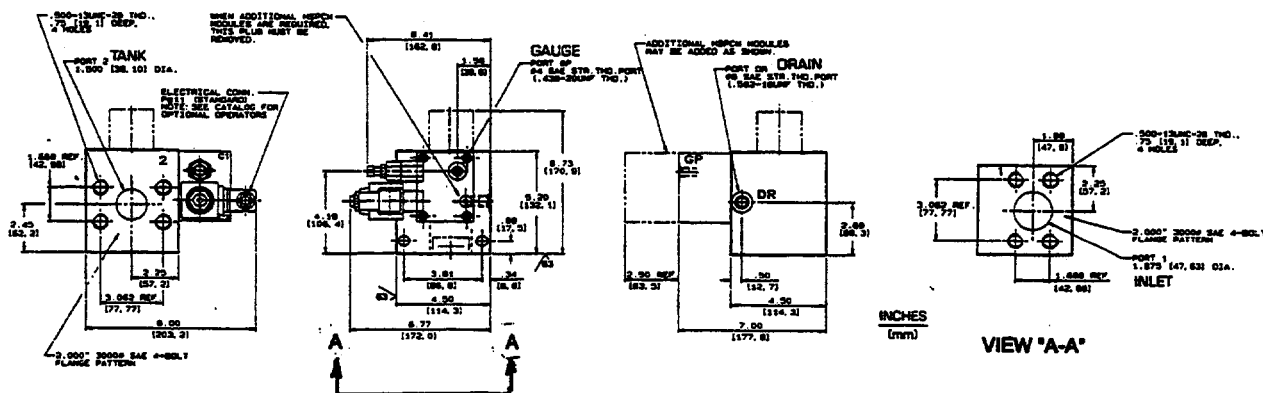

##### HSR2001/FY1-68-C

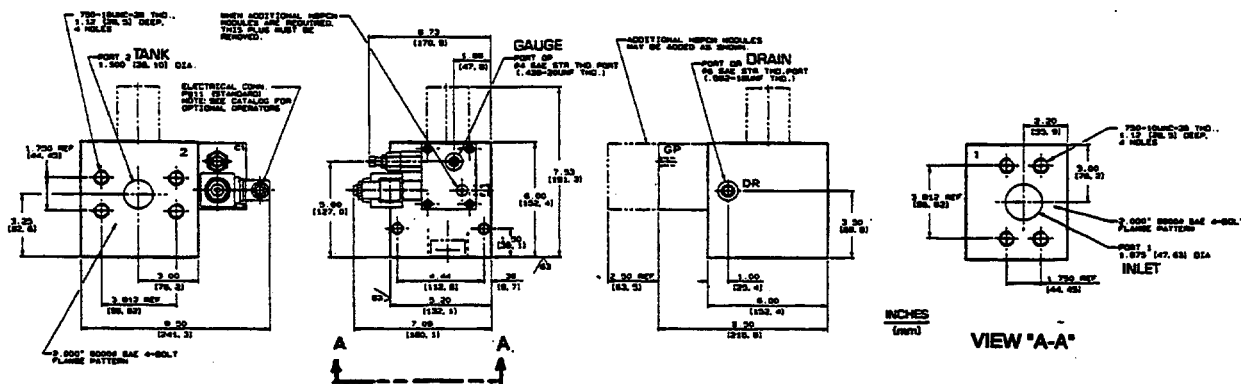

## How To Order

### Screw-In Cartridge Only


HSR2001

### Cartridge With Line Mount Block

3000 psi (207 bar) service pressure  
HSR2001/FY2-38-C\*


5000 psi (345 bar) service pressure  
HSR2001/FY1-68-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

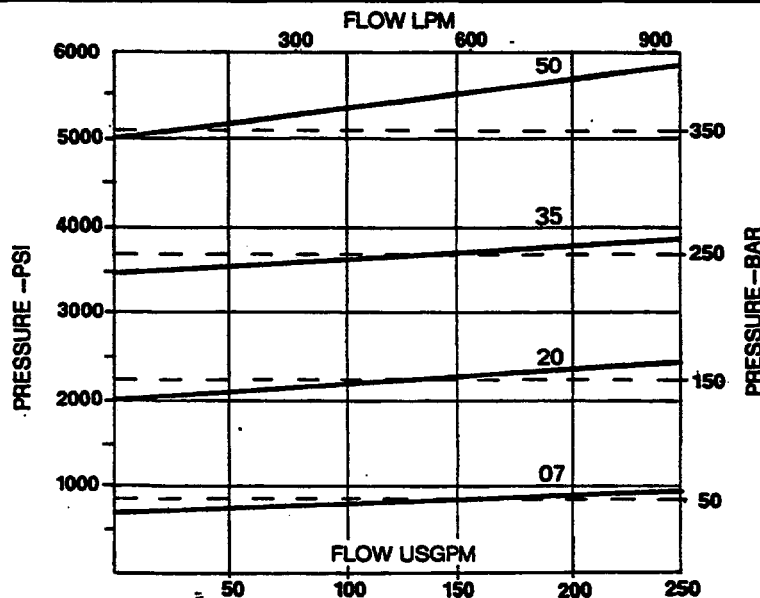

220 USGPM  $\Delta$  100 PSI  
(833,8 LPM  $\Delta$  6,9 Bar)

### HSR2001



#### Data Sheet

#### Relief Valve for Pilot Operation

### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

### Typical HSR2001 How To Order Example


HSR2001 / FY2-38-C / 1-38-4-C / Optional

Cartridge

Line  
Mount  
Block


Pilot  
Control  
Module  
(PCM)  
(For detailed  
information on Pilot  
Control Modules  
See DS 85100)

Additional  
PCMs  
If Required

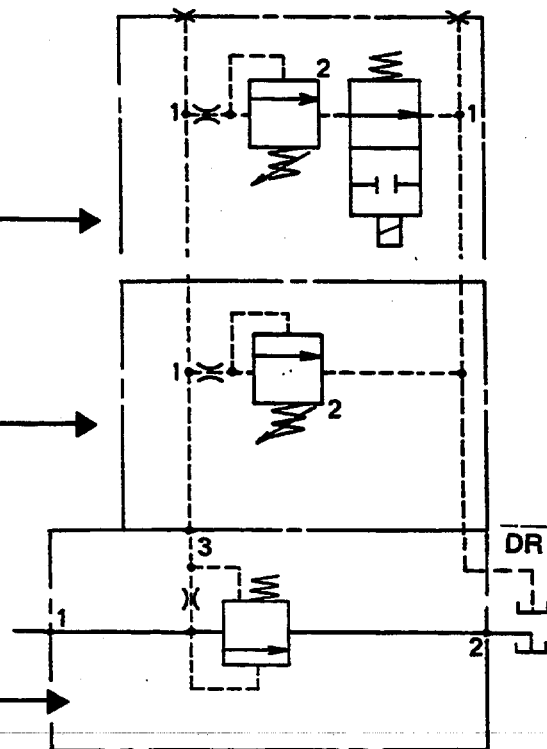

220 USGPM  $\Delta$  100 PSI  
(833,8 LPM  $\Delta$  6,9 Bar)

### HSR2001



#### Data Sheet


#### Relief Valve for Pilot Operation

### How To Order


Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C


#### PCM Code

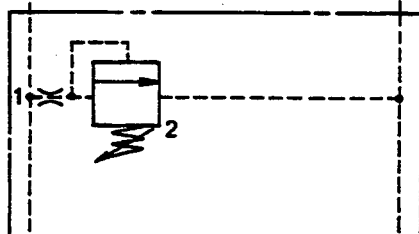


PCM Code 1

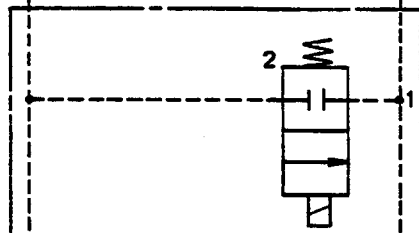


PCM Code 2

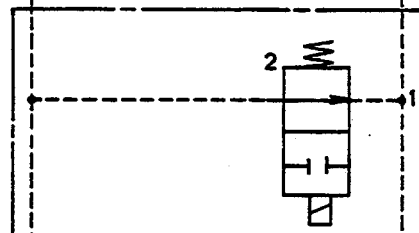

PCM Code 20

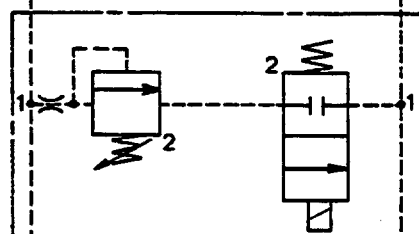

PCM Code 3

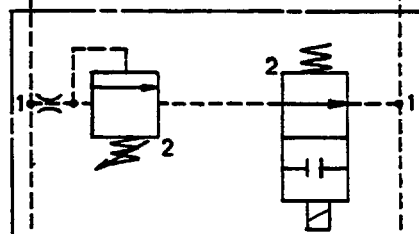

PCM Code 30

#### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4- 241,0 bar)  
50 = 50-5000 psi (3,4- 345,0 bar)

#### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

#### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

#### Electrical Connector (if required)


S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug

#### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.


## HSDPR601



### Data Sheet

### Differential Pressure Relief Valve

400196HS

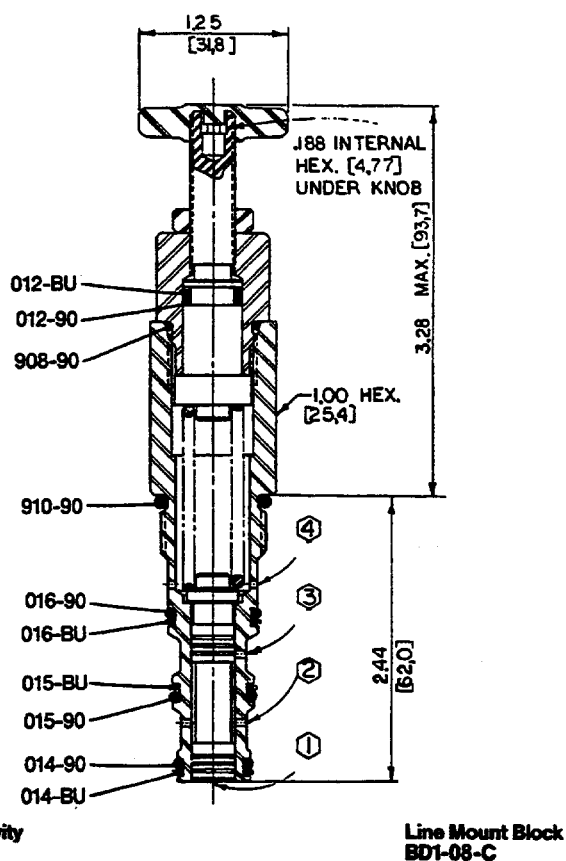

### Application

The HSDPR valve can be used as a pilot control valve to monitor differential loads.

### Operation

Inlet is port 2 and outlet is port 3. A screw is used to adjust the compression on the valve spring. If there is no pressure at pilot port 4, the valve opens when pressure at port 1 exceeds the spring setting [example—spring set at 500 psi (34,5 bar)], valve opens when pressure at port 1 is 500 psi (34,5 bar). If there is pressure at both port 1 and 4, the valve opens when the pressure differential (between ports 1 and 4) exceeds the spring setting (example—spring set for 500 psi (34,5 bar), 1000 psi (69 bar) present at port 4—valve starts to open when pressure at port 1 exceeds 1525 psi (105,2 bar).

### Features


HSDPR relief valves are available with several springs so you can select the one that best fits your needs. The cartridge is constructed of steel parts and all operating parts are hardened as required. Cartridge is designed for ease of service and field repair.

### Specifications

Maximum working pressure—  
2400 psi (165,5 bar)  
Adjustable pressure range—Depends on pressure range selected—see "How To Order."  
Seals—Viton  
Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)  
Filtration—Maintain SAE Class 6, ISO 18/15  
Seal kit—HSSK-600-P



### HSDPR601




#### Data Sheet

#### Differential Pressure Relief Valve

### Line Mount Specifications

HSDPR601/BD1-08-C

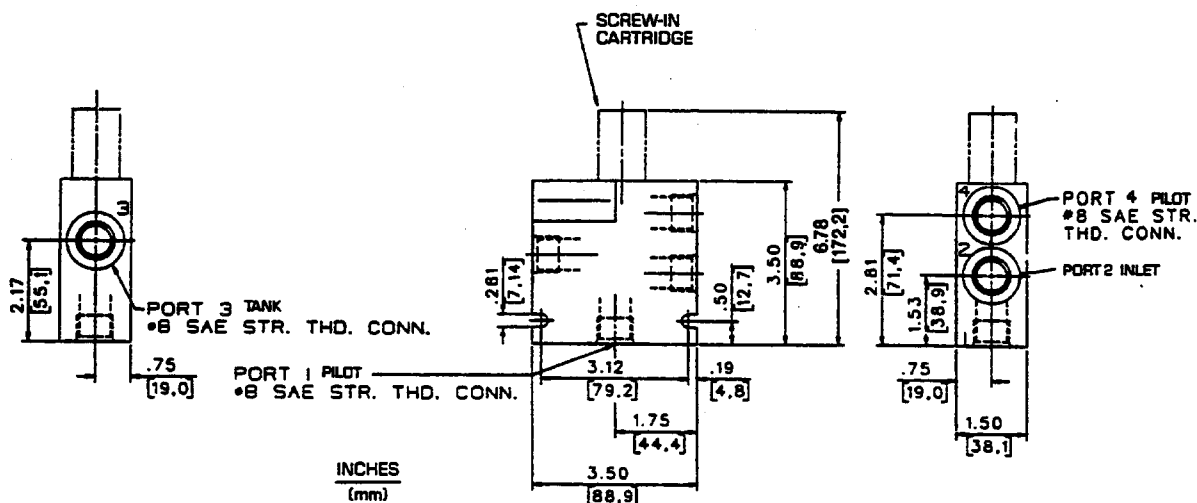

### How To Order

#### Screw-In Cartridge Only


HSDPR601-

	Pressure Differential	
	psi	bar
2	50- 200	3,4- 13,8
6	100- 600	6,9- 41,4
12	200-1200	13,8- 82,8
24	400-2400	27,6-165,5

#### Cartridge With Line Mount Block

HSDPR601-\_/BD1-08-C


## HSAUR601



### Data Sheet

### Accumulator Unloading Relief Valve

400246HS

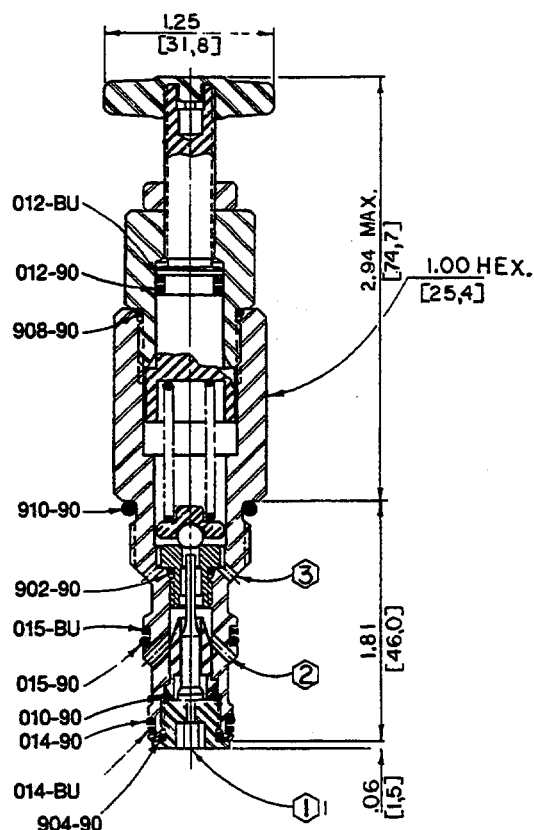

Form Tool Cavity  
HS-600-3

Line Mount Block  
BC1-08-C

### Application

The HSAUR valve is used with a HSP (poppet) valve, and a HSC (check) valve to unload the pump and maintain a preset pressure in an accumulator system.

### Operation

See typical system on back page. While the accumulator is being charged the HSAUR valve is in the closed position, the poppet of the HSP valve is balanced and blocks flow thru that valve, the HSC check valve opens and allows the pump to deliver fluid to the accumulator and system. When system and accumulator are fully charged, pressure at port 2 of the HSAUR valve pushes the ball off it's seat while pressure at port 1 pushes the pin up against the ball. When the ball is off it's seat the vent port of the HSP valve is open to drain allowing the poppet valve to open and unloading the pump delivery directly to the reservoir. The differential ratio between the ball seat and pin diameter dictates the reseal pressure percentage. NOTE: The HSAUR valve should not be used without HSP and HSC valves which must be sized to match pump delivery.


### Features

Several maximum pressure and reseal pressure ratios are offered in each adjustable (spring) range. The cartridge is constructed of steel parts and all operating parts are hardened. Cartridge is designed for ease of service and field repair.

### Specifications

Maximum operating pressure—  
5000 psi (345 bar)  
Adjustable pressure range—See  
"How To Order"  
Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F  
Seals—Viton  
Operating temperature—-40°F to 350°F  
(-39.6°C to 175°C)  
Filtration—Maintain SAE Class 6, ISO 18/15  
Seal kit—HSSK-600-Q

### HSAUR601




#### Data Sheet

#### Accumulator Unloading Relief Valve

#### Line Mount Specifications

HSAUR601/BC1-08-C

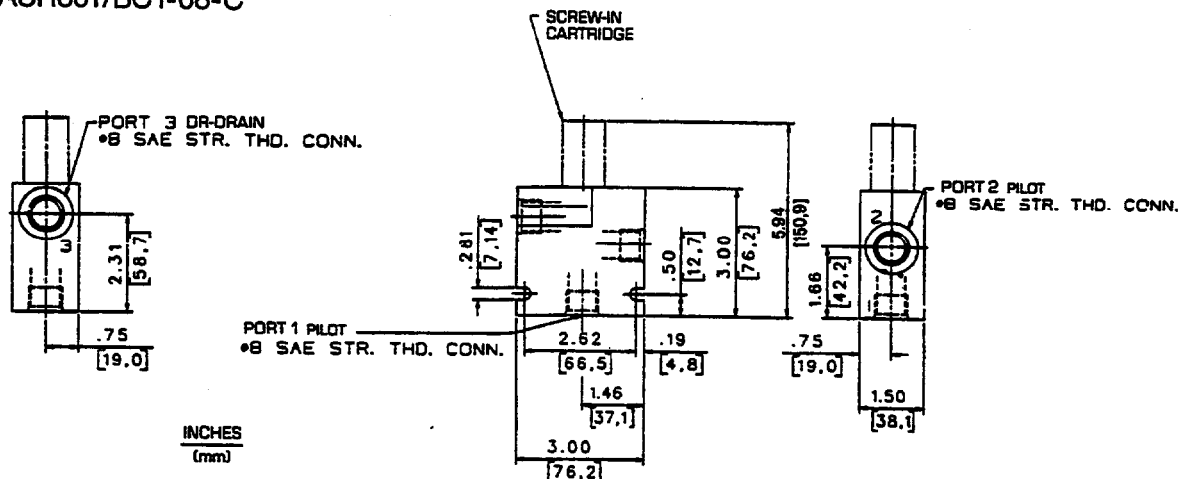

INCHES  
(mm)

#### How To Order

#### Screw-In Cartridge Only

HSAUR601-

Normal Reseat Pressure as a Percentage of Unloading Pressure Setting		33%	22%	17%	12%	9%**
Maximum Unloading	psi	1000	880	820	770	750
	bar	69,0	60,7	56,6	53,1	51,7
Order Code		A	B	C	D	E
Maximum Unloading	psi	2500	2300	2000	1900	1750
	bar	172,4	158,6	137,9	131,0	120,7
Order Code		F	G	H	I	J
Maximum Unloading	psi	4600	4100	3850	3600	3400
	bar	317,2	282,8	265,5	248,3	234,5
Order Code		K	L	M	N	O


\*Valve is rated for a maximum of 5000 psi

\*\*The 9% reseat valve is not recommended at very low pressures. As an example, 9% of 400 psi = 36 psi (2.5 bar) which results in a reseat pressure of 364 which would cause the pump to go on and off rapidly—9% of 4500 psi (310.3 bar) = 405 psi (27.9 bar) resulting in a reseat pressure of 4095 psi (282.4 bar) a reasonable differential pressure.

#### Cartridge With Line Mount Block


HSAUR601-\_\_\_/BC1-08-C

Typical accumulator system using HSAUR unloading valve and HSP poppet valve to un-load pump.



39 USGPM  $\Delta$  100 PSI  
(147,9 LPM  $\Delta$  6,9 Bar)


### HSU1200-DA



#### Data Sheet

#### Direct Acting External Operated N.C. Sequence Valve

400016HS

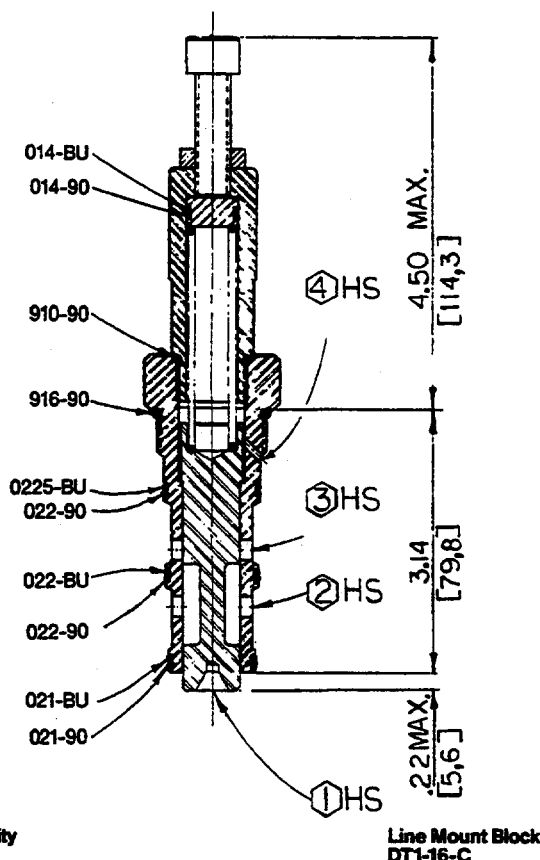

#### Application

The HSU-DA sequence valve connects primary and secondary system branches after the pressure requirements in a third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings.

#### Operation

As the pressure at port 1 overcomes the spring resistance it moves the main spool to connect ports 2 and 3. Because the spring chamber is connected (separately) to drain, back pressure at operating ports will not affect the pressure setting.

#### Features

Direct acting for fast accurate response, several pressure ranges available, constructed of steel parts, operating parts are hardened and ground as required. Cartridge is designed for easy service and field repair.

#### Specifications

Rated flow to—39 USgpm (147,9 lpm)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—See  
"How To Order"

Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F


Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15


Seal kit—HSSK-1200-D

#### Performance Curve

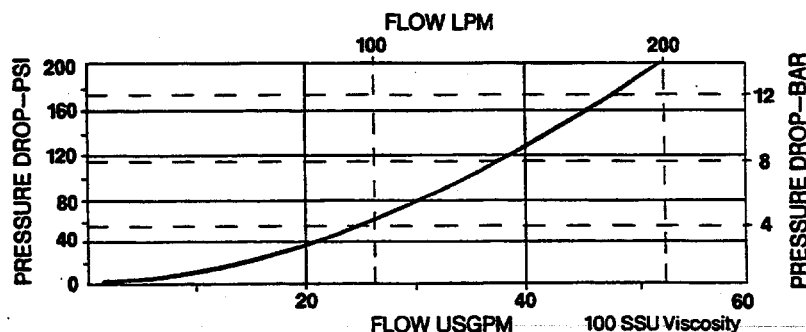

39 USGPM  $\Delta$  100 PSI  
(147,9 LPM  $\Delta$  6,9 Bar)


### HSU1200-DA



#### Data Sheet

#### Direct Acting External Operated N.C. Sequence Valve

HSU1200-DA-\_/DT1-16-C/21-C

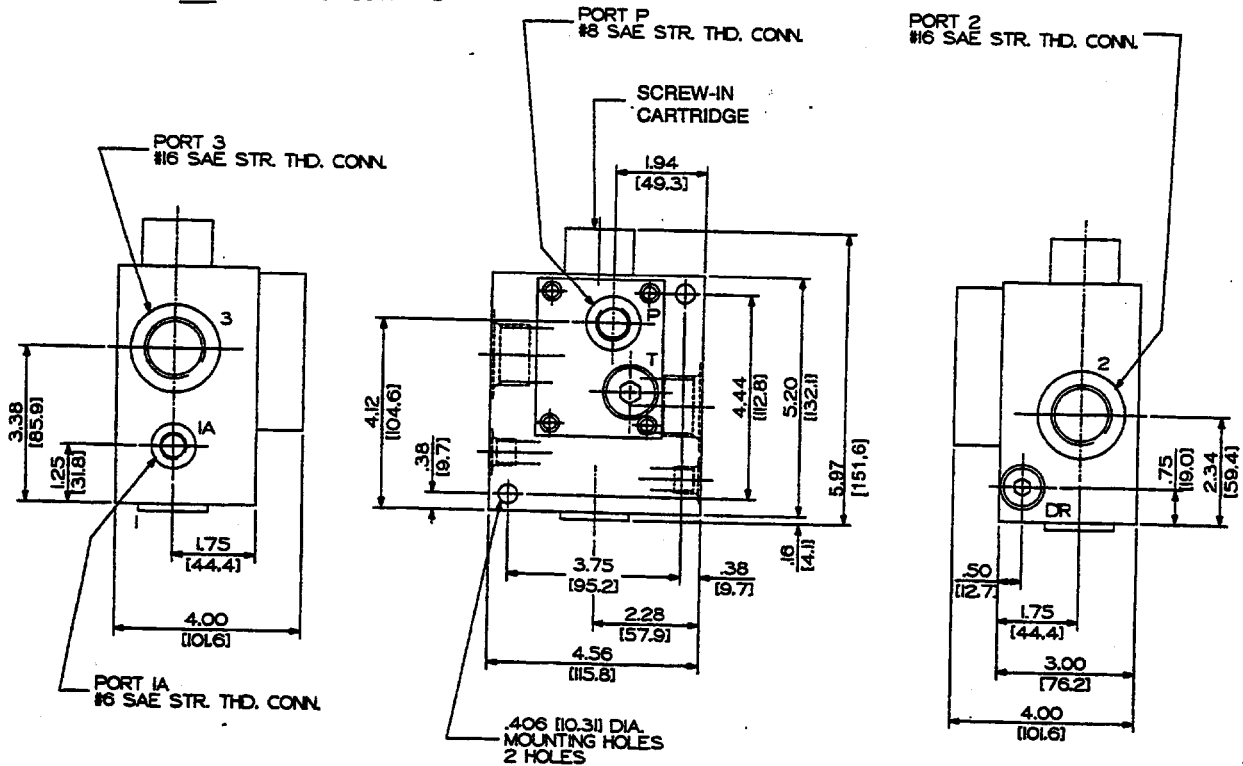

## How To Order

### Screw-In Cartridge Only

HSU1200-DA-


	Pressure Range	
	psi	bar
06	25- 60	1,7- 4,1
1	50-100	3,5- 6,9
2	120-200	8,3-13,8
3	185-300	12,8-20,7

### Cartridge with Line Mount Block

HSU1200-DA-\_/DT1-16-C/21-C

39 USGPM  $\Delta$  100 PSI  
(147,8 LPM  $\Delta$  6,9 Bar)


### HSU01200-DA



Data Sheet

Direct Acting External, Operated Normally Open, Sequence Valve

400017HS

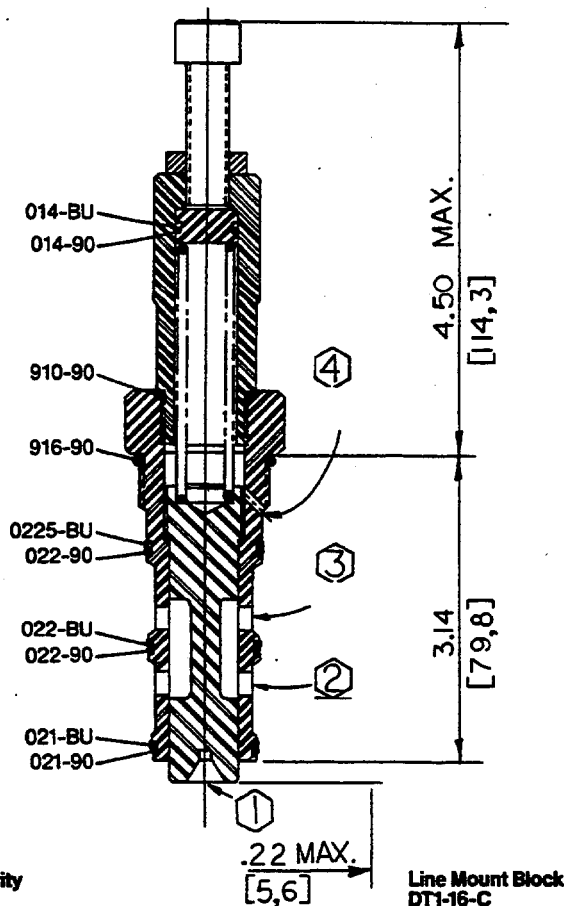

### Application

The HSU-DA sequence valve disconnects primary and secondary system branches after the pressure requirement in a third branch has been satisfied.

### Operation

As the pressure at port 1 overcomes the spring resistance, it moves the main spool to block port from 3. Because the spring chamber is connected (separately) to drain, back pressure at operating ports will not alter resistance.

### Features

Direct acting for fast accurate response, several pressure ranges available, constructed of steel parts, operating parts are hardened and ground as required. Cartridge is designed for easy service and field repair.

### Specifications

Rated flow to—57 USgpm  $\Delta$  200 psi  
(215,8 lpm  $\Delta$  13,8 bar)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—See "How To Order"

Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F


Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15


Seal kit—HSSK-1200-D

### Performance Curve

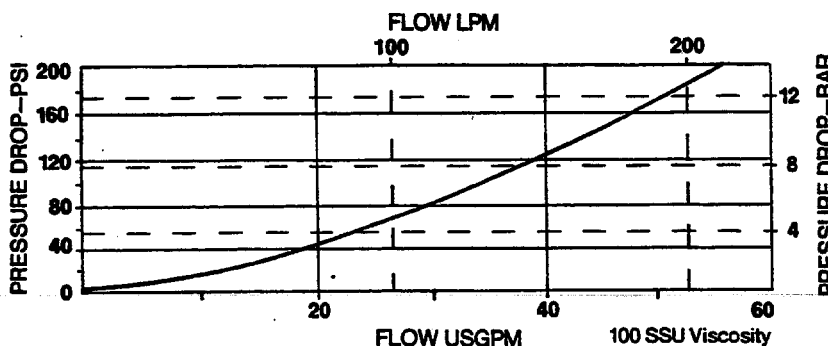

39 USGPM  $\Delta$  100 PSI  
(147,8 LPM  $\Delta$  6,9 Bar)

### HSUO1200-DA




Data Sheet

Direct Acting External, Operated Normally Open, Sequence Valve

### Line Mount Specifications

HSUO1200-DA-\_\_\_/DT1-16-C/21-C

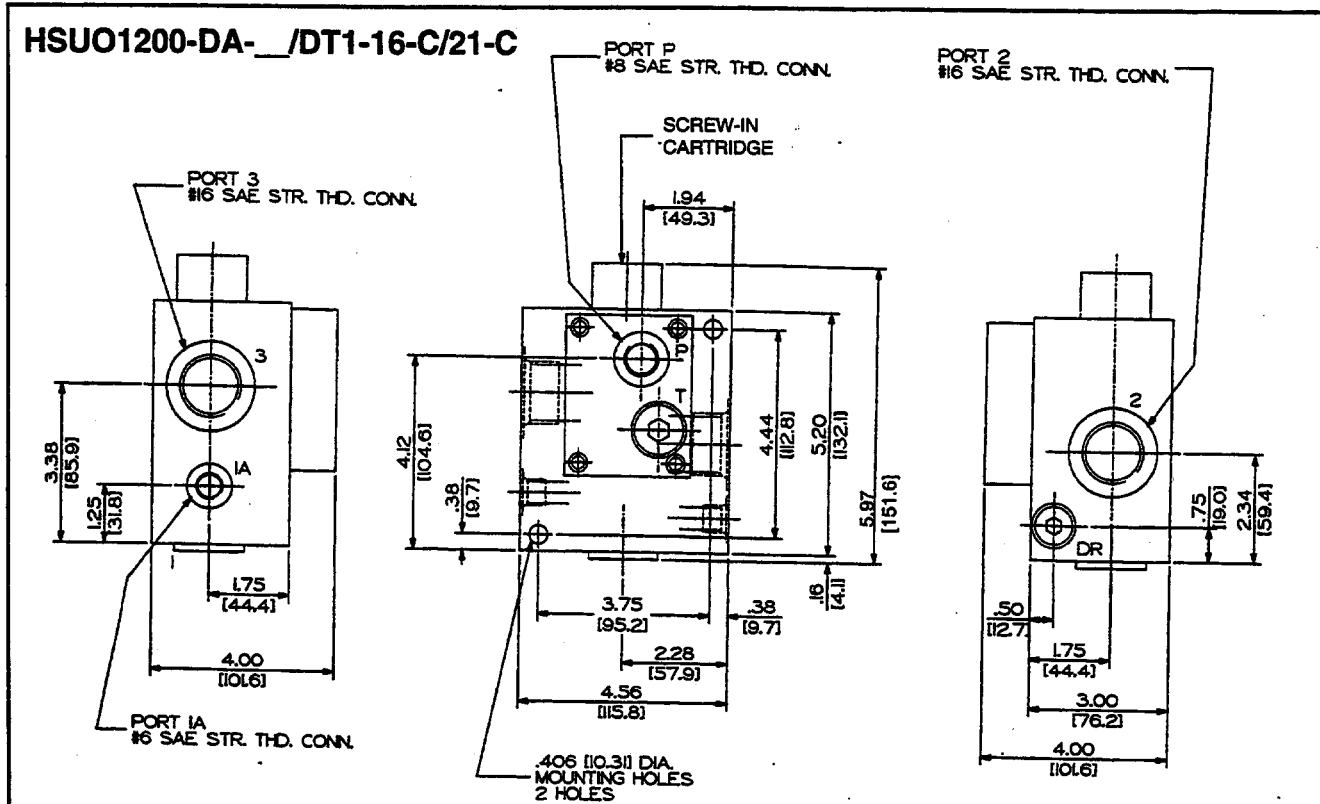

### How To Order

#### Screw-In Cartridge Only

HSUO1200-DA-


	Pressure Range	
	psi	bar
06	25- 60	1,7- 4,1
1	50-100	3,5- 6,9
2	120-200	8,3-13,8
3	185-300	12,8-20,7

#### Cartridge With Line Mount Block

HSUO1200-DA-\_\_\_/DT1-16-C/21-C

84 USGPM  $\Delta$  100 PSI  
(318,4 LPM  $\Delta$  6,9 Bar)


### HSU1600



#### Data Sheet

#### Normally Closed Sequence Valve for Pilot Operation

400052HS

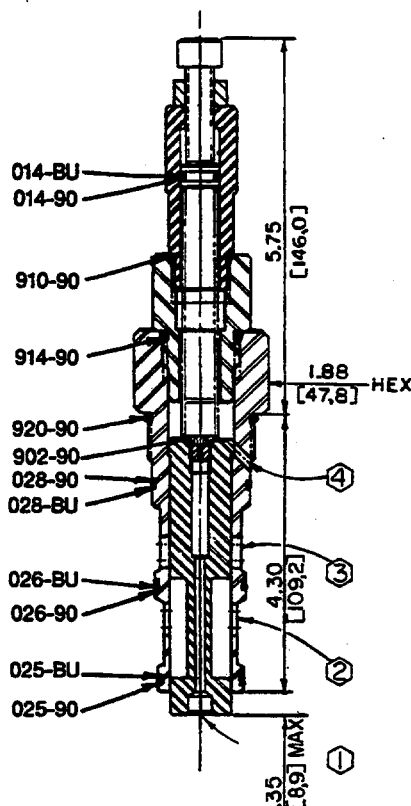

Form Tool Cavity  
HS-1600-4

Line Mount Block  
3000 psi (207 bar) = EW1-24-C  
5000 psi (345 bar) = EW1-66-C

#### Application

When operated by a HSLR pilot operator, the HSU sequence valve connects primary and secondary system branches after the pressure requirement in a third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings.

#### Operation

A HSLR pilot relief valve must be connected via port 4 to top (spring side) of the main spool and pressure must be connected to port 1 to operate the relief valve which pilots the sequence valve to connect ports 2 and 3. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow between ports 2 and 3.

#### Features


A trim adjustment is provided to vary the cracking and reseal pressure. The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

#### Specifications

Rated flow to- 84 USgpm (318,4 lpm)  
Maximum operating pressure—  
5000 psi (345 bar)  
Adjustable pressure range— See HSLR  
Pilot Valve DS 82550-B1.1A & B2.1A  
Viscosity range - 27- 30 SSU at 100°F  
35 - 2000 SSU at 100°F

Seals—Viton  
Operating temperature- -40°F to 350°F  
(-39,6°C to 175°C)  
Filtration— Maintain SAE Class 6, ISO 18/15  
Seal kit- HSSK-1600D


#### Performance Curve

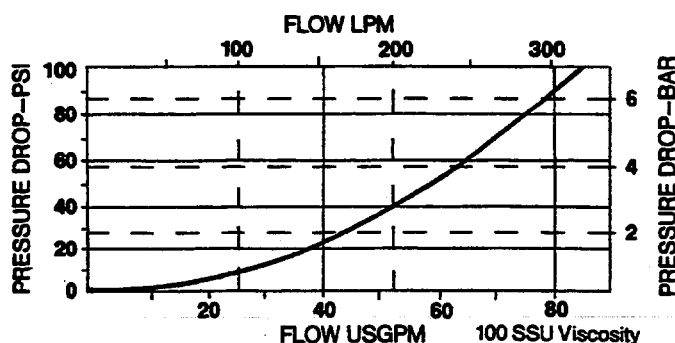



84 USGPM  $\Delta$  100 PSI  
(318,4 LPM  $\Delta$  6,9 Bar)

### HSU1600




#### Data Sheet


#### Normally Closed Sequence Valve for Pilot Operation

### Line Mount Specifications

#### HSU1600/EW1-24-C

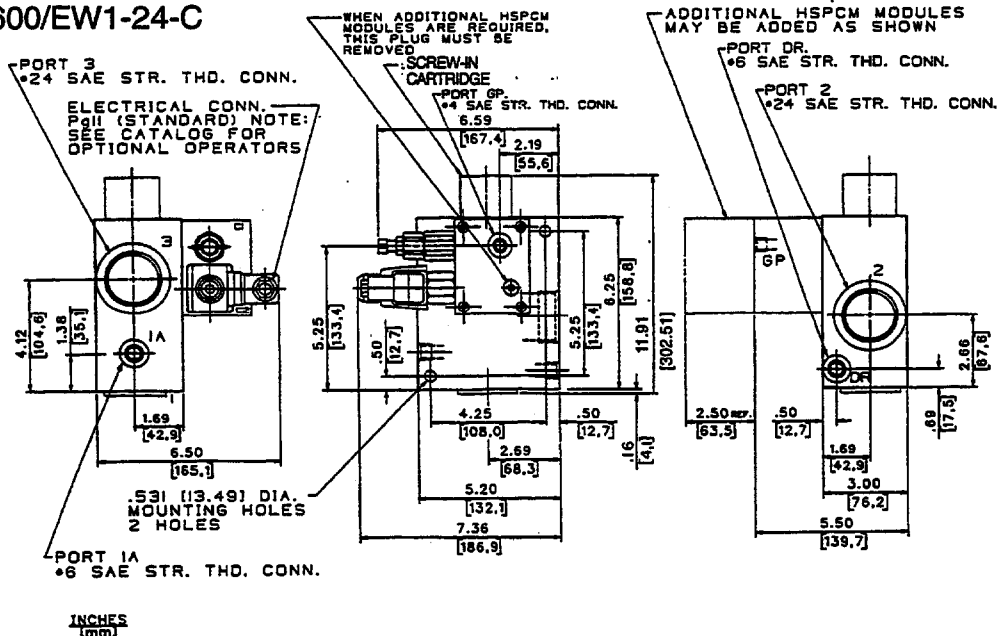

#### HSU1600/EW1-66-C

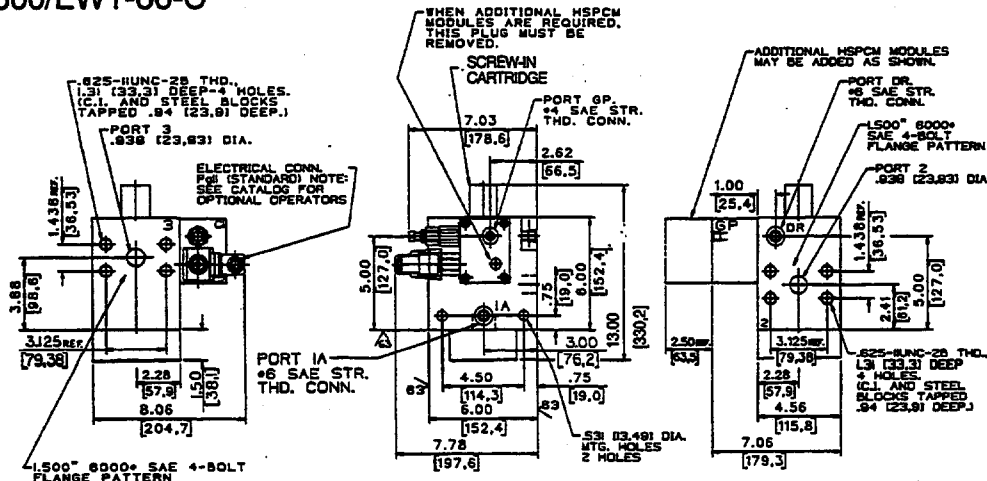

### How To Order

#### Screw-In Cartridge Only

HSU1600

#### Cartridge With Line Mount Block

HSU1600/EW1-24-C\*

3000 psi (207 bar) service pressure


HSU1600/EW1-66-C\*

5000 psi (345 bar) service pressure

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

84 USGPM  $\Delta$  100 PSI  
(318,4 LPM  $\Delta$  6,9 Bar)

### HSU1600



#### Data Sheet

#### Normally Closed Sequence Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

#### Typical HSU1600 How To Order Example


HSU1600 / EW1-24-C / 1-35-4-C / Optional

Cartridge

Line  
Mount  
Block


Pilot  
Control  
Module  
(PCM)  
(For detailed  
information on Pilot  
Control Modules  
See DS 85100)

Additional  
PCMs  
If Required

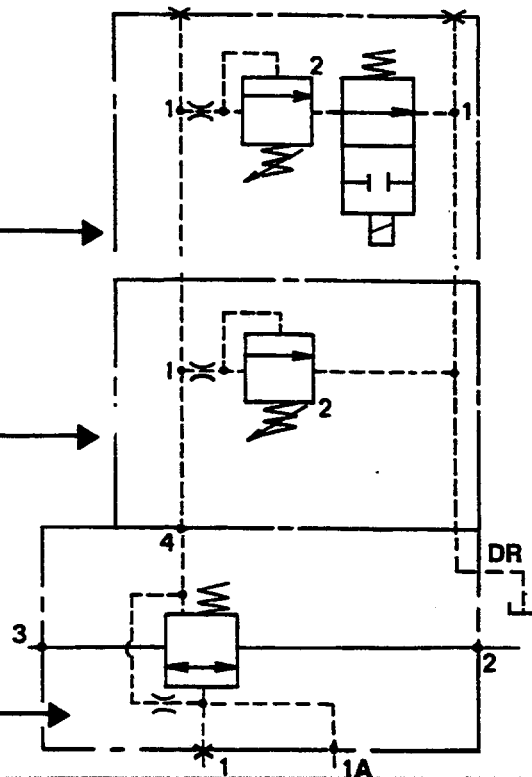

84 USGPM  $\Delta$  100 PSI  
(318,4 LPM  $\Delta$  6,9 Bar)

### HSU1600



Data Sheet


Normally Closed Sequence Valve for Pilot Operation

## How To Order


Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C


### PCM Code

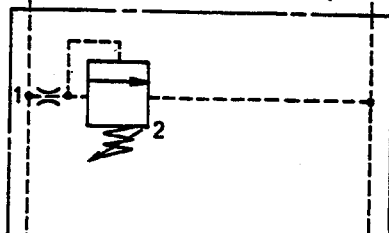


PCM Code 1

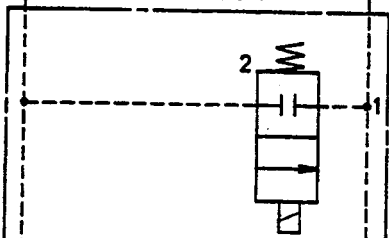


PCM Code 2

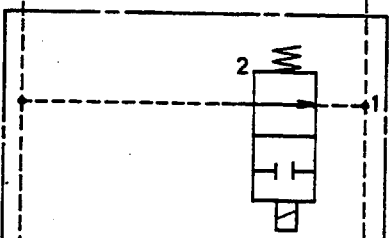

PCM Code 20

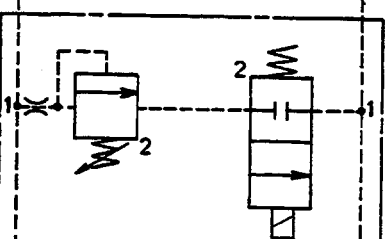

PCM Code 3

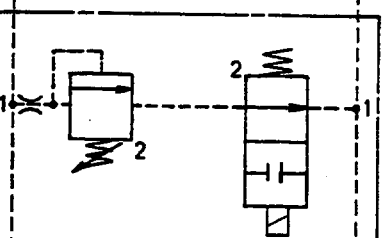

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4-138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

84 USGPM  $\Delta$  100 PSI  
(318,4 LPM  $\Delta$  6,9 Bar)


### HSUO1600



#### Data Sheet

#### Normally Open Sequence Valve for Pilot Operation

400053HS

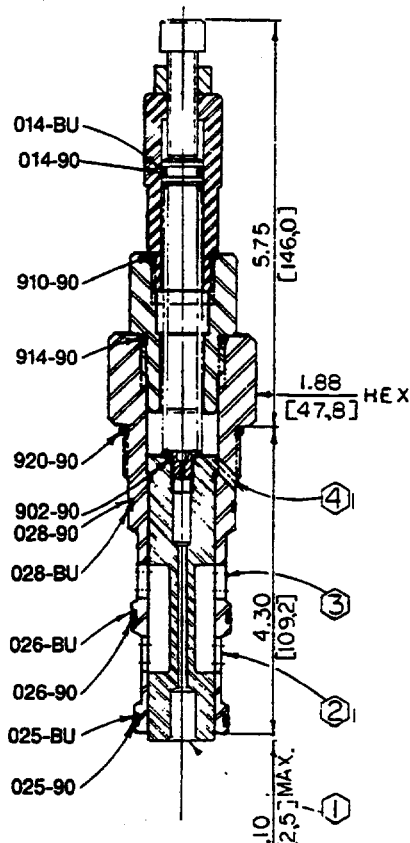

Form Tool Cavity  
HS-1600-4

Line Mount Block  
3000 psi (207 bar) = EW1-24-C  
5000 psi (345 bar) = EW1-66-C

#### Application

When operated by a HSLR pilot operator, the HSUO sequence valve disconnects primary and secondary system branches after the pressure requirement in third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings or vented to close it.

#### Operation

A HSLR pilot relief valve must be connected via port 4 to top (spring side) of the main spool and pressure must be connected to port 1 to operate the relief valve which pilots the sequence valve to block flow between ports 2 and 3. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to block flow between ports 2 and 3.

#### Features

Several pressure ranges are available to choose from. The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or repair.

#### Specifications

Rated flow to- 119 USgpm  $\Delta$  2000 psi  
(450,5 lpm  $\Delta$  13,8 bar)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range— See HSLR  
Pilot Valve DS 82550-B2.1A

Viscosity range - 27-30 SSU at 100°F


35 - 2000 SSU at 100°F

Seals—Viton


Operating temperature- -40°F to 350°F  
(-39,6°C to 175°C)

Filtration— Maintain SAE Class 6, ISO 18/15  
Seal kit- HSSK-1600D

#### Performance Curve

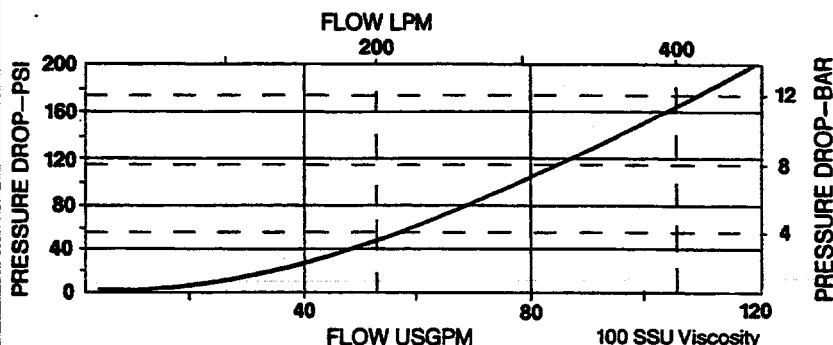


## HSUO1600



### Data Sheet

### Normally Open Sequence Valve for Pilot Operation

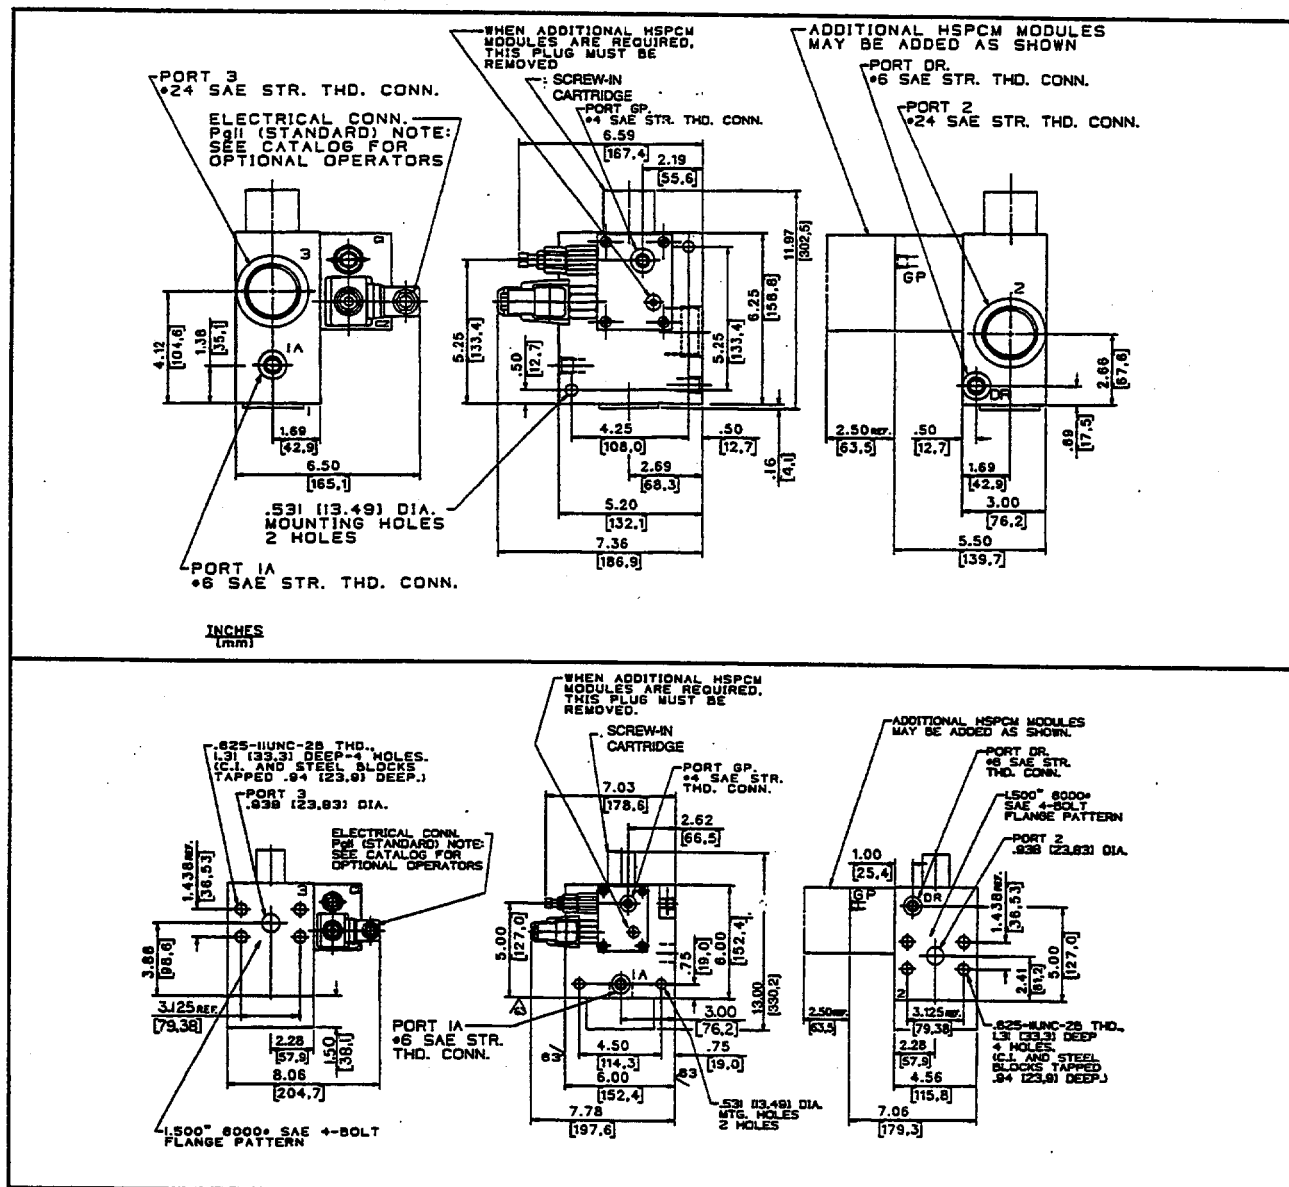

## How To Order

### Screw-In Cartridge Only

HSUO1600

### Cartridge With Line Mount Block


3000 psi (207 bar) service pressure  
HSUO1600/EW1-24-C •

5000 psi (345 bar) service pressure  
HSUO1600/EW1-66-C •

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for How To Order Line Mount Blocks with Pilot Control Modules.

84 USGPM  $\Delta$  100 PSI  
(318,4 LPM  $\Delta$  6,9 Bar)

### HSUO1600



#### Data Sheet


#### Normally Open Sequence Valve for Pilot Operation


#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

#### Typical HSUO1600 How To Order Example

HSUO1600 / EW1-24-C / 1-35-4-C / Optional

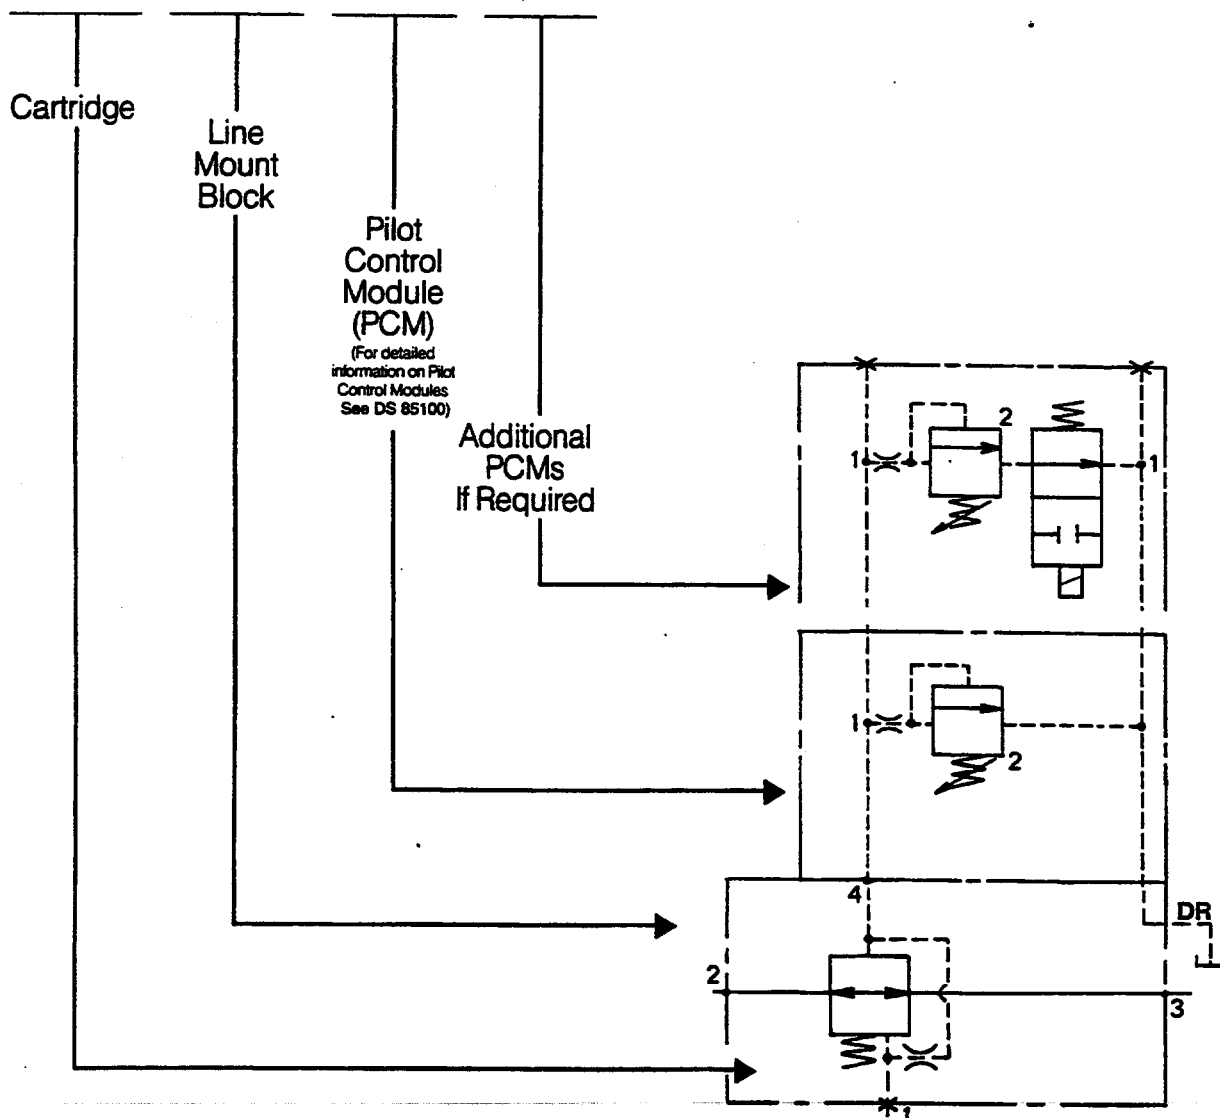



### Data Sheet


### Normally Open Sequence Valve for Pilot Operation

## How To Order


### Typical PCM How To Order Example:

/30 - 35 - 4 - 0W - C


### PCM Code

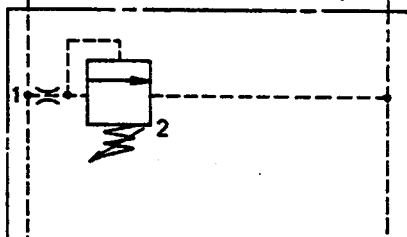


PCM Code 1

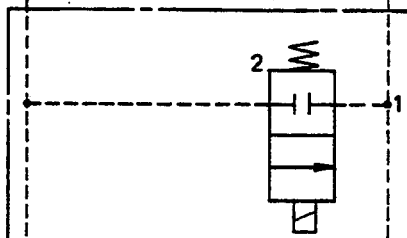


PCM Code 2

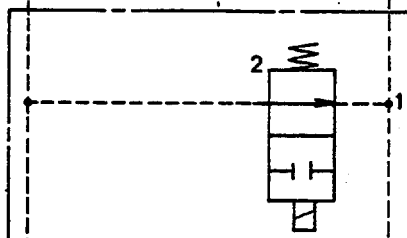

PCM Code 20

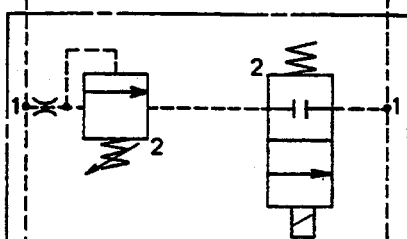

PCM Code 3

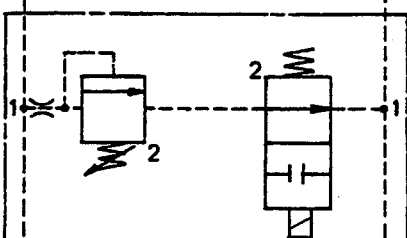

PCM Code 30

### Pressure Range

07 = 50 - 700 psi (3,4 - 48,0 bar)  
20 = 50 - 2000 psi (3,4 - 138,0 bar)  
35 = 50 - 3500 psi (3,4 - 241,0 bar)  
50 = 50 - 5000 psi (3,4 - 345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

41 USGPM  $\Delta$  100 PSI  
(155,4 LPM  $\Delta$  6,9 Bar)


### HSS801-P



#### Data Sheet

#### Piloted Sequence Valve

400824HS

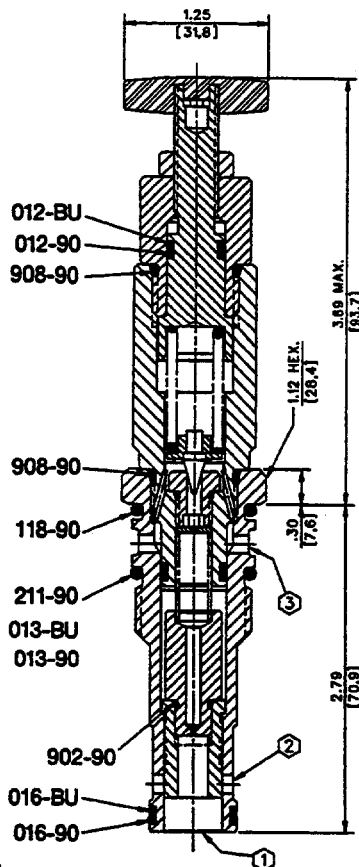

Form Tool Cavity  
HSPR-800-3

Line Mount Block  
CJ1-10-C

#### Application

The HSS pilot operated sequence valve is used for very precise sequential (pressure) operation in systems where amount of flow may vary. It can also be used as a relief valve where back pressure exists in exhaust line (provided port 3 is connected directly to reservoir).

#### Operation

Inlet pressure is ported thru orifices in the center of the valve spool to the pilot relief valve (in upper portion of the body). When inlet pressure exceeds this valve's setting pressure on top side of the main spool is relieved (thru port 3), a pressure imbalance then exists across the main spool and port 1 pressure raises the main spool to allow flow to port 2, allowing operation of a secondary system or flow to drain. Because port 2 is separate from port 3, any back pressure at port 2 does not add to the setting of the pilot valve spring and alter pressure setting.

#### Features

HSS cartridge valve is constructed of steel parts all operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair. Several ranges of adjustable pressure are offered.

#### Specifications

Rated flow to—41 USgpm (155,4 lpm)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—See "How To Order"

Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F


Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15

Seal kit—HSSK-800-C

#### Performance Curve

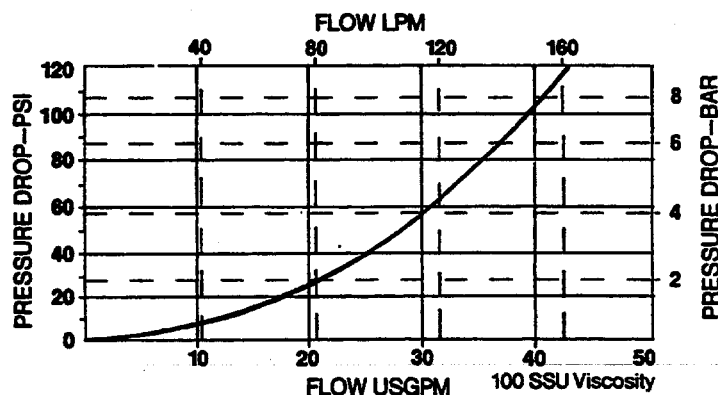






# VALVE, SCREW-IN CARTRIDGE

41 USGPM  $\Delta$  100 PSI  
(155,4 LPM  $\Delta$  6,9 Bar)

## HSS801-P

ENGINEERING

2




Data Sheet

Piloted Sequence Valve

### Line Mount Specifications

HSS801-P/CJ1-10-C

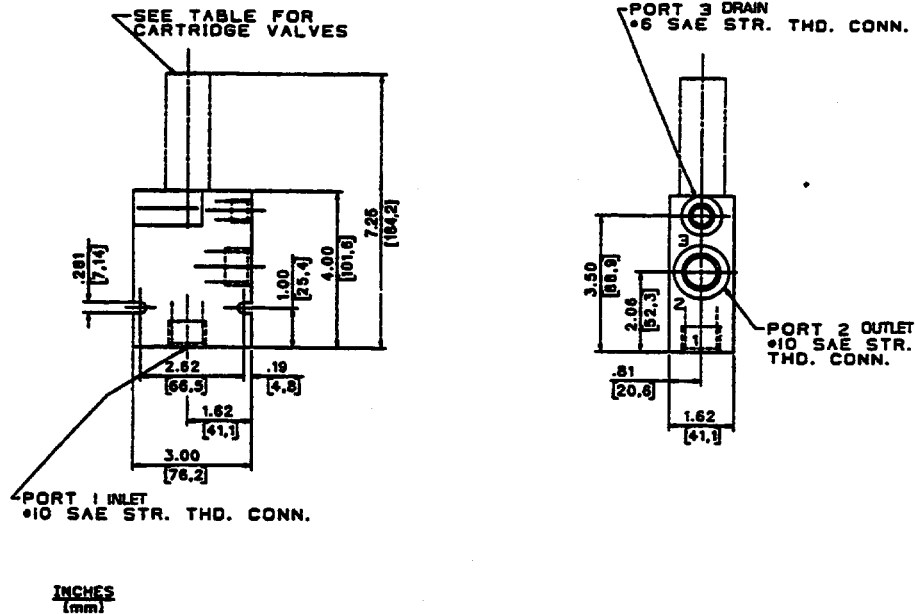

### How To Order

#### Screw-In Cartridge Only

HSS801-P-\_\_\_

	Pressure Range	
	psi	bar
07	50- 700	3,4- 48
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345


Note: All adjusting screw options on DS 82550-1B are available for this valve.

#### Cartridge With Line Mount Block

HSS801-P-\_\_\_/CJ1-10-C

17.5 USGPM  $\Delta$  100 PSI  
(66,3 LPM  $\Delta$  6,9 Bar)


### HSUO801-P



#### Data Sheet

#### Normally Open External Pilot Sequence Valve

400823HS

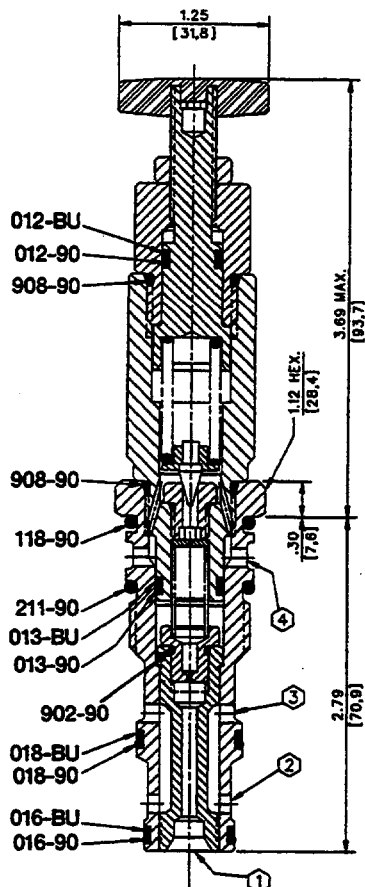

Form Tool Cavity  
HS-800-4

Line Mount Block  
CM1-10-C

#### Application

The HSUO sequence valve disconnects primary and secondary system branches after the pressure requirement in a third branch is satisfied.

#### Operation

Pilot pressure must be connected to port 1 to operate the integral relief valve which pilots the sequence valve to block port 2 from 3. Port 1 pressure is ported thru orifices in the center of the valve to the pilot relief valve (in upper portion of the body). When this pressure exceeds this valve setting, pressure on the side of the main spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the main spool to block flow between ports 2 and 3.

#### Features

Several pressure ranges are available to choose from. The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

#### Specifications

Rated flow to—17.5 USgpm (66,3 lpm)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—See "How To Order"

Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F


Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15


Seal kit—HSSK-800-D

#### Performance Curve

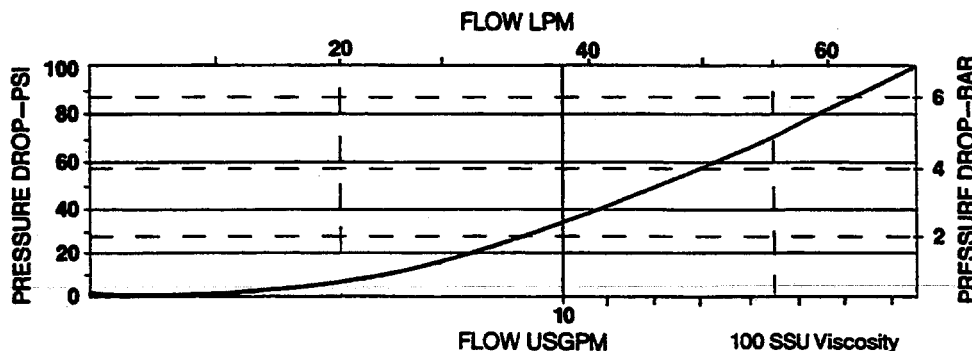

17.5 USGPM  $\Delta$  100 PSI  
(66,3 LPM  $\Delta$  6,9 Bar)

### HSUO801-P




Data Sheet

Normally Open External Pilot Sequence Valve

### Line Mount Specifications

HSUO801-P/CM1-10-C

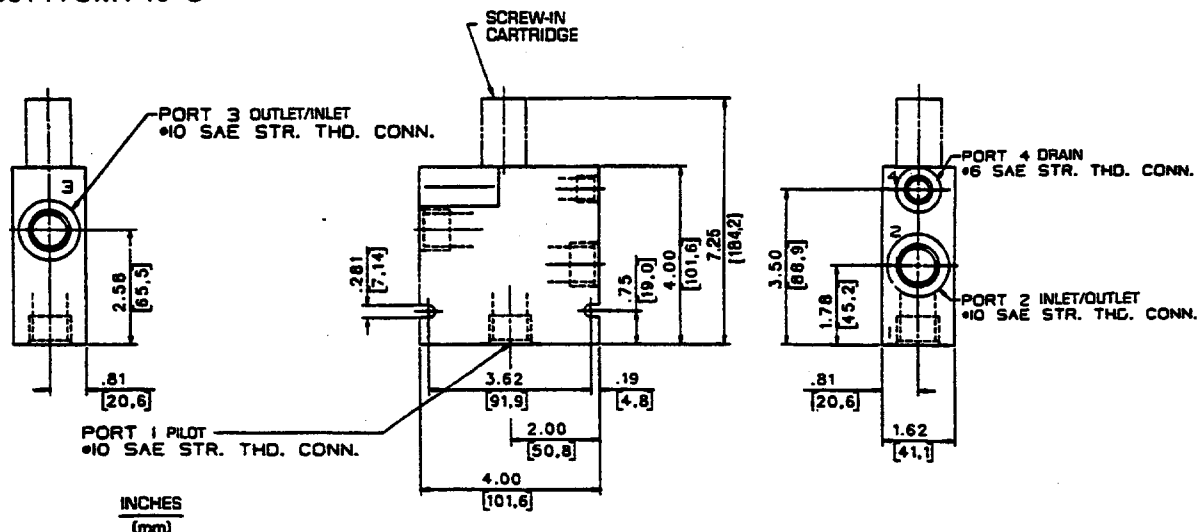

## How To Order


### Screw-In Cartridge Only

HSUO801-P-\_\_\_\_\_

	Pressure Range	
	psi	bar
07	50- 700	3,4- 48
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345


### Cartridge With Line Mount Block

HSUO801-P-\_\_\_/CM1-10-C



### Data Sheet

### Sequence Valve for Pilot Operation

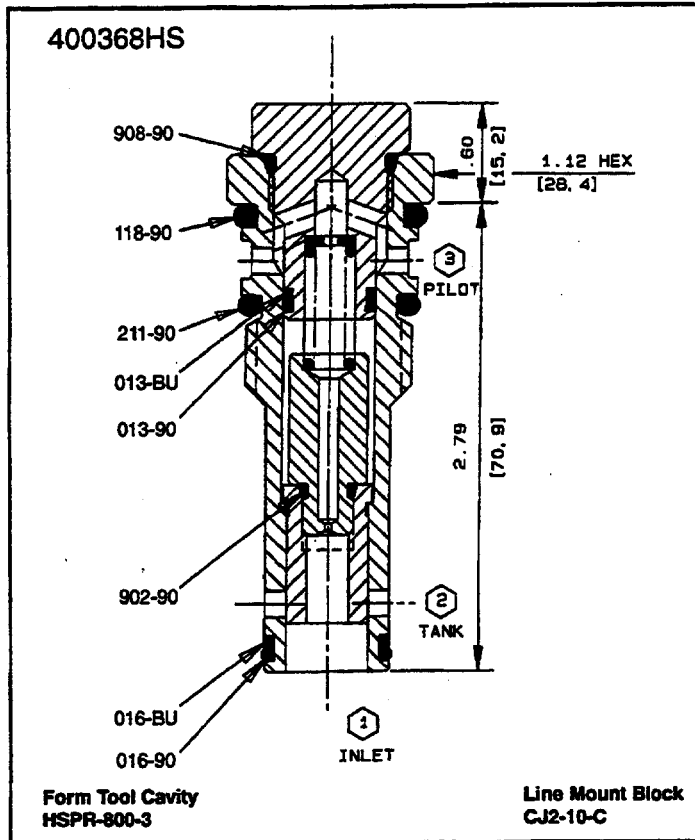

### Application

This HSS cartridge is a precise sequence valve, when operated by a HSLR pilot operator, for sequential (pressure) control in systems where amount of flow may vary. It can also be used as a relief valve where back pressure exists in exhaust line (provided port 2 of HSLR pilot valve is connected directly to reservoir).

### Operation


A HSLR pilot relief valve must be connected via port 3 to the top (spring side) of the main spool. When inlet pressure (ported thru the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2 allowing operation of a secondary system or flow to drain. Because port 2 of the HSLR pilot valve is not connected to port 2 of the sequence valve, back pressure at sequence valve port 2 does not add to the resistance valve of the pilot valve spring and alter the pressure opening valve.

### Features

Thru use of standard pilot (HLSR) relief valves, this valve can provide numerous pre-selected or infinitely variable settings. A trim adjustment is provided to vary the cracking and re-seat pressure.

The HSS cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

### Performance Curves

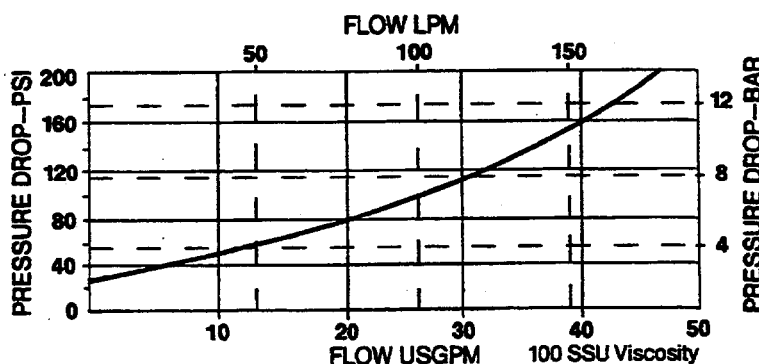

### Specifications

Rated flow to— 35 USgpm 132,7 lpm)  
Maximum operating pressure—  
5000 psi (345 bar)  
Adjustable pressure range— See HSLR  
Pilot Valve, DS 82550-B2.1A  
Viscosity range— 27-30 SSU at 100°F  
35-2000 SSU at 100°F  
Seals—Viton  
Operating temperature— -40°F to 350°F  
(-39,6°C to 175°C)  
Filtration— Maintain SAE Class 6, ISO 18/15  
Seal Kit HSSK-800-C




## VALVE, SCREW-IN CARTRIDGE

35 USGPM 100 PSI  
(132,7 LPM 6,9 Bar)

### HSS8801-RP

ENGINEERING


2



#### Data Sheet

#### Sequence Valve for Pilot Operation

### Line Mount Specification

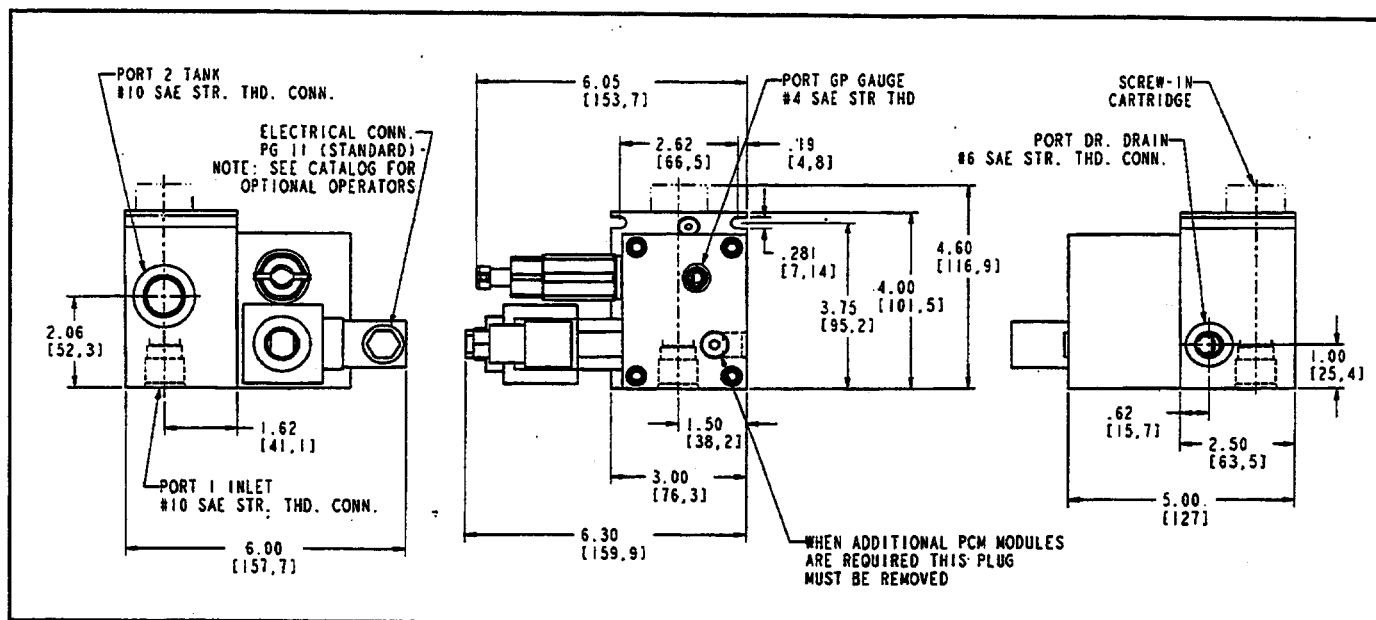

## How To Order

**Screw-In Cartridge Only**  
HSS801-RP

**Cartridge With Line Mount Block**  
HSS801-RP/CJ2-10-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.




# VALVE, SCREW-IN CARTRIDGE

35 USGPM 100 PSI  
(132,7 LPM 6,9 Bar)

## HSS8801-RP

ENGINEERING

3



Data Sheet

Sequence Valve for Pilot Operation

### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

### Typical HSS801-RP How To Order Example


HSS801-RP / CJ2-10-C / 1-35-4-C / Optional

Cartridge

Line  
Mount  
Block

Pilot  
Control  
Module  
(PCM)  
(For detailed  
information on Pilot  
Control Modules  
See Section D)


Additional  
PCMs  
If Required

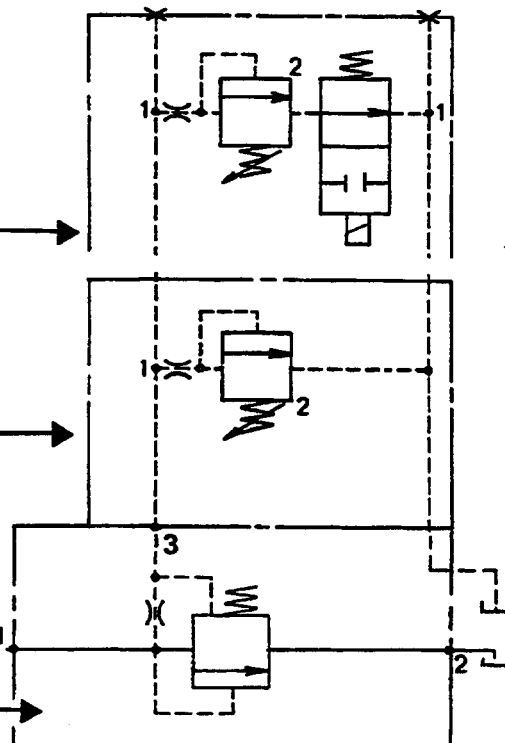

Telephone: (414) 327-1700  
Fax: (414) 327-0532

OILGEAR  
2300 So. 51st. Street  
Milwaukee, WI USA 53219

Reissued: Dec., 1997  
DS 82670-B7.4



### HSS8801-RP


Data Sheet

Sequence Valve for Pilot Operation


## How To Order

Typical PCM How To Order Example: / 1 - 35 - 4 - 0W - C


### PCM Code

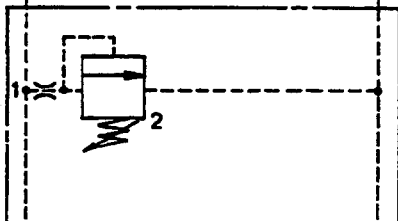


PCM Code 1

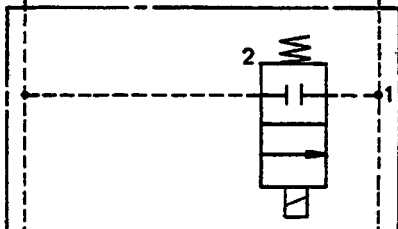


PCM Code 2

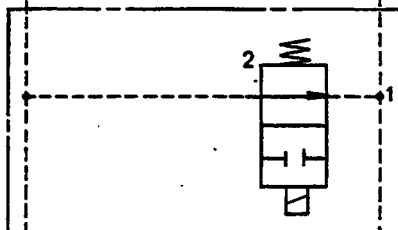

PCM Code 20

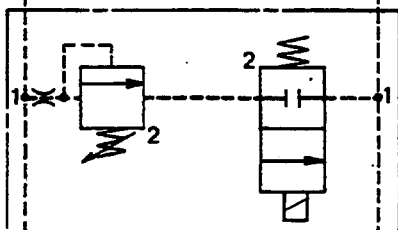

PCM Code 3

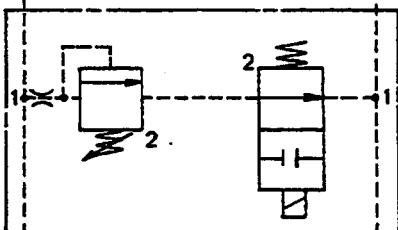

PCM Code 30

### Pressure Range

07 = 50 - 700 psi (3,4 - 48,0 bar)  
20 = 50 - 2000 psi (3,4 - 138,0 bar)  
35 = 50 - 3500 psi (3,4 - 241,0 bar)  
50 = 50 - 5000 psi (3,4 - 345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light (115 V.A.C. only)  
R = .5 NPTF connector w/o indicator light  
W = .5 NPTF connector with indicator light


### Block Material

C = Cast Iron (Standard)

See DS 85100 for additional information on pilot controls.

60 USGPM  $\Delta$  100 PSI  
(227,4 LPM  $\Delta$  6,9 Bar)


### HSS1201



#### Data Sheet

#### Sequence Valve for Pilot Operation

400349HS

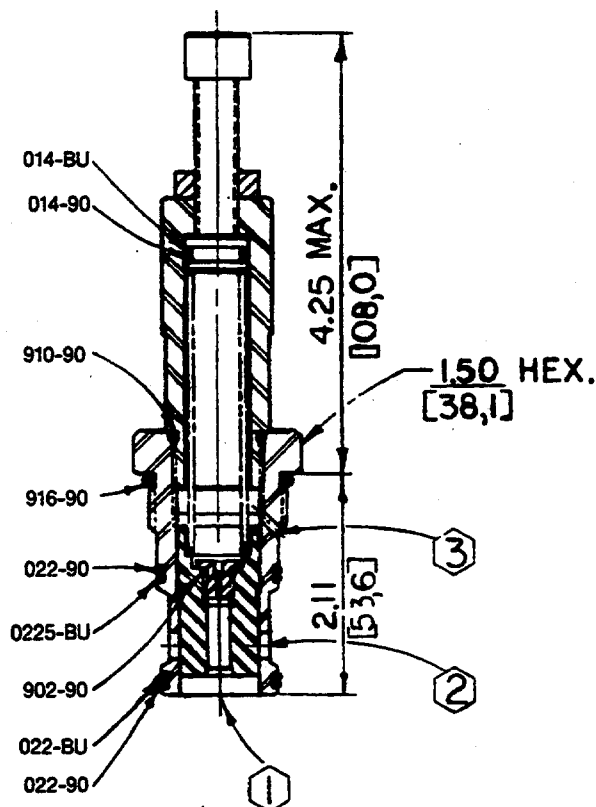

Form Tool Cavity  
HS-1200-3

Line Mount Block  
DR2-16-C

#### Application

This HSS cartridge is a precise sequence valve, when operated by a HSLR pilot operator, for sequential (pressure) control in systems where amount of flow may vary. It can also be used as a relief valve where back pressure exists in exhaust line (provided port 2 of HSLR pilot valve is connected directly to reservoir).

#### Operation

A HSLR pilot relief valve must be connected via port 3 to the top (spring side) of the main spool. When inlet pressure (ported thru the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2 allowing operation of a secondary system or flow to drain. Because port 2 of the HSLR pilot valve is not connected to port 2 of the sequence valve, back pressure at sequence valve port 2 does not add to the resistance valve of the pilot valve spring and alter the pressure opening valve.

#### Features


Thru use of standard pilot (HSLR) relief valves, this valve can provide numerous pre-selected or infinitely variable settings. A trim adjustment is provided to vary the cracking and re-seat pressure.

The HSS cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.


#### Specifications

- Rated flow to—60 USgpm (227,4 lpm)
- Maximum operating pressure—5000 psi (345 bar)
- Adjustable pressure range—See HSLR Pilot Valve, DS 82550-B2.1A
- Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F
- Seals—Viton
- Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)
- Filtration—Maintain SAE Class 6, ISO 18/15
- Seal Kit HSSK-1200-C

#### Performance Curve

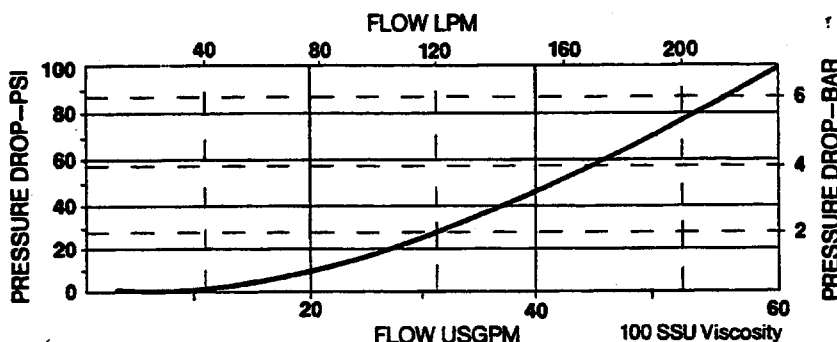






### Data Sheet

### Sequence Valve for Pilot Operation

### Line Mount Specifications

#### HSS1201/DR2-16-C

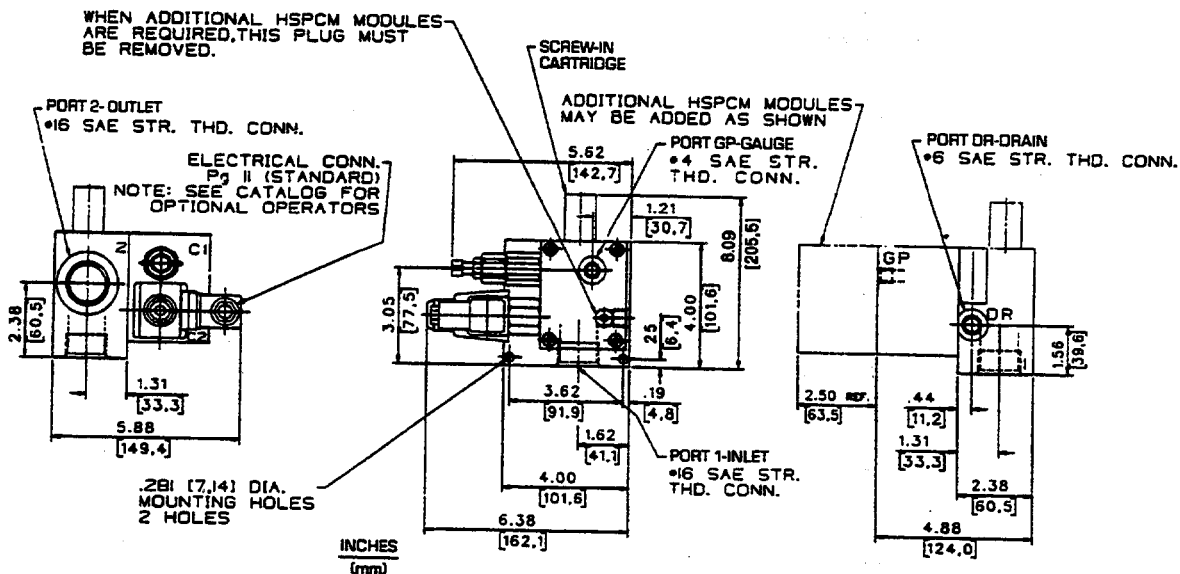

## How To Order

### Screw-In Cartridge Only

HSS1201


### Cartridge With Line Mount Block

HSS1201/DR2-16-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

60 USGPM  $\Delta$  100 PSI  
(227,4 LPM  $\Delta$  6,9 Bar)

### HSS1201



#### Data Sheet

#### Sequence Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

#### Typical HSS1201 How To Order Example

HSS1201 / DR2-16-C / 1-35-4-C / Optional


Cartridge

Line  
Mount  
Block

Pilot  
Control  
Module  
(PCM)


(For detailed  
information on Pilot  
Control Modules  
See DS 85100)

Additional  
PCMs  
If Required

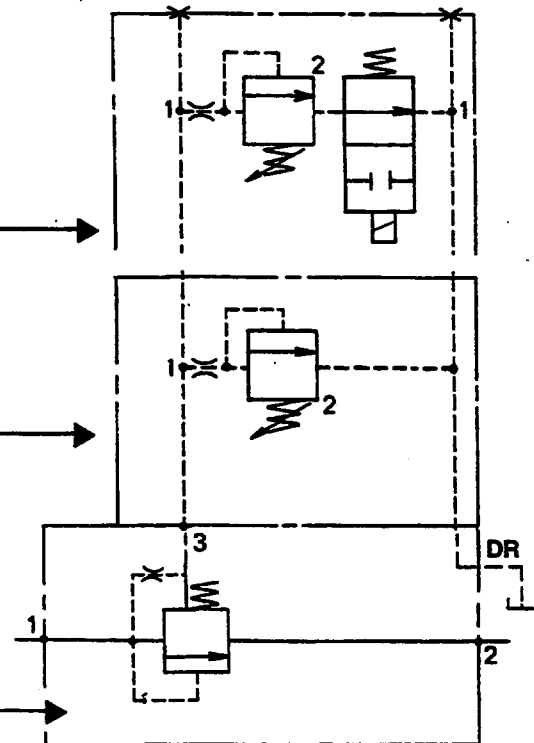

60 USGPM  $\Delta$  100 PSI  
(227,4 LPM  $\Delta$  6,9 Bar)

### HSS1201




Data Sheet

Sequence Valve for Pilot Operation

## How To Order

Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C

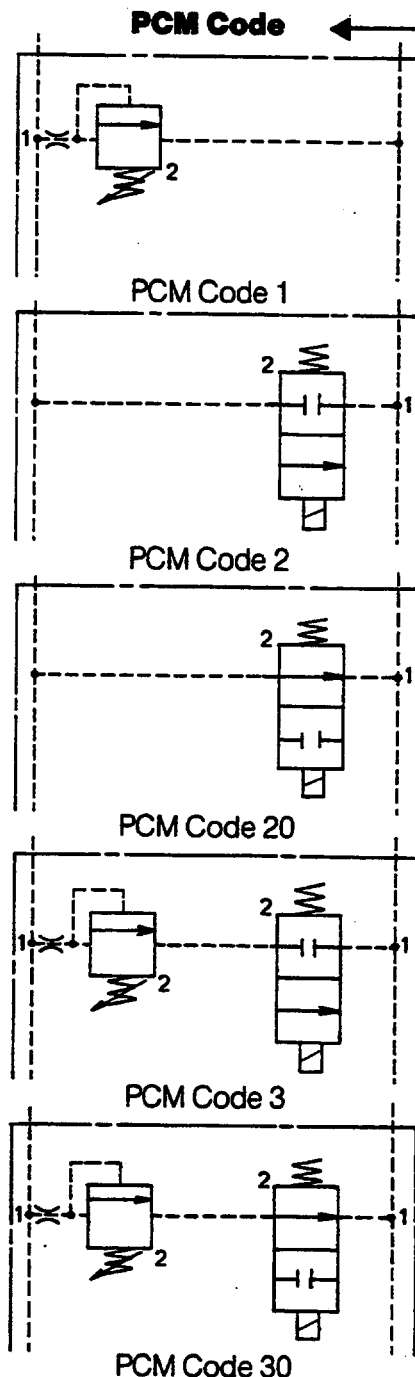

### Pressure Range

07 = 50 - 700 psi (3,4 - 48,0 bar)  
20 = 50 - 2000 psi (3,4 - 138,0 bar)  
35 = 50 - 3500 psi (3,4 - 241,0 bar)  
50 = 50 - 5000 psi (3,4 - 345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

108 USGPM  $\Delta$  100 PSI  
(409,3 LPM  $\Delta$  6,9 Bar)


### HSS1600



#### Data Sheet

#### Sequence Valve for Pilot Operation

400282HS

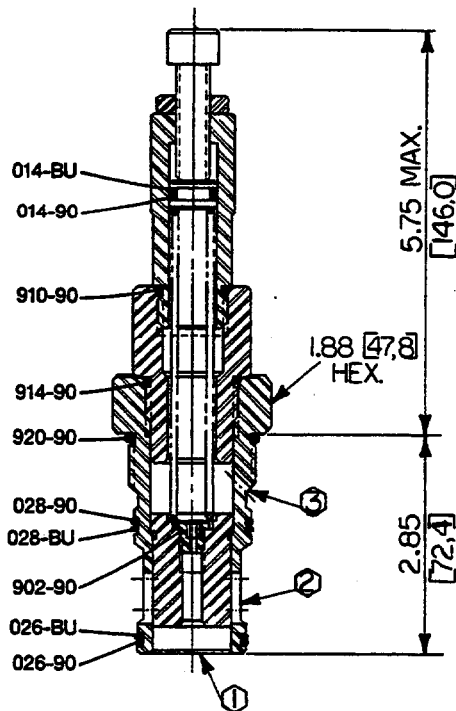

Form Tool Cavity  
HS-1600-3

Line Mount Block  
3000 psi (207 bar) = EV1-24-C  
5000 psi (345 bar) = EV1-66-C

### Application

This HSS cartridge is a precise sequence valve, when operated by a HSLR pilot operator, for sequential (pressure) control in systems where amount of flow may vary. It can also be used as a relief valve where back pressure exists in exhaust line (provided port 2 of HSLR pilot valve is connected directly to reservoir).

### Operation


A HSLR pilot relief valve must be connected via port 3 to the top (spring side of the main spool). When inlet pressure (ported thru the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2 allowing operation of a secondary system or flow to drain. Because port 2 of the HSLR pilot valve is not connected to port 2 of the sequence valve, back pressure at sequence valve port 2 does not add to the resistance value of the pilot valve spring and alter the pressure opening valve.

### Features

Thru use of standard pilot (HSLR) relief valves, this valve can provide numerous pre-selected or infinitely variable settings. A trim adjustment is provided to vary the cracking and re-seat pressure.

The HSS cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

### Performance Curve

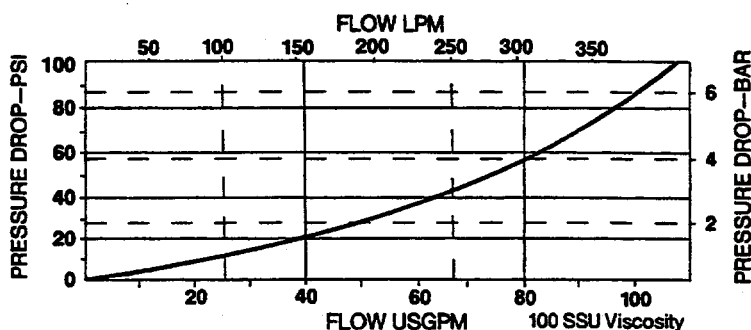

### Specifications

Rated flow to—108 USgpm (409,3 lpm)

Maximum operating pressure—

5000 psi (345 bar)

Adjustable pressure range—See HSLR

Pilot Valve, DS 82550-B2.1A

Viscosity range—27-30 SSU at 100°F

35-2000 SSU at 100°F

Seals—Viton

Operating temperature—-40°F to 350°F


(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15

Seal kit-HSSK-1600-C

108 USGPM  $\Delta$  100 PSI  
(409,3 LPM  $\Delta$  6,9 Bar)



### HSS1600



#### Data Sheet

#### Sequence Valve for Pilot Operation

### Line Mount Specifications

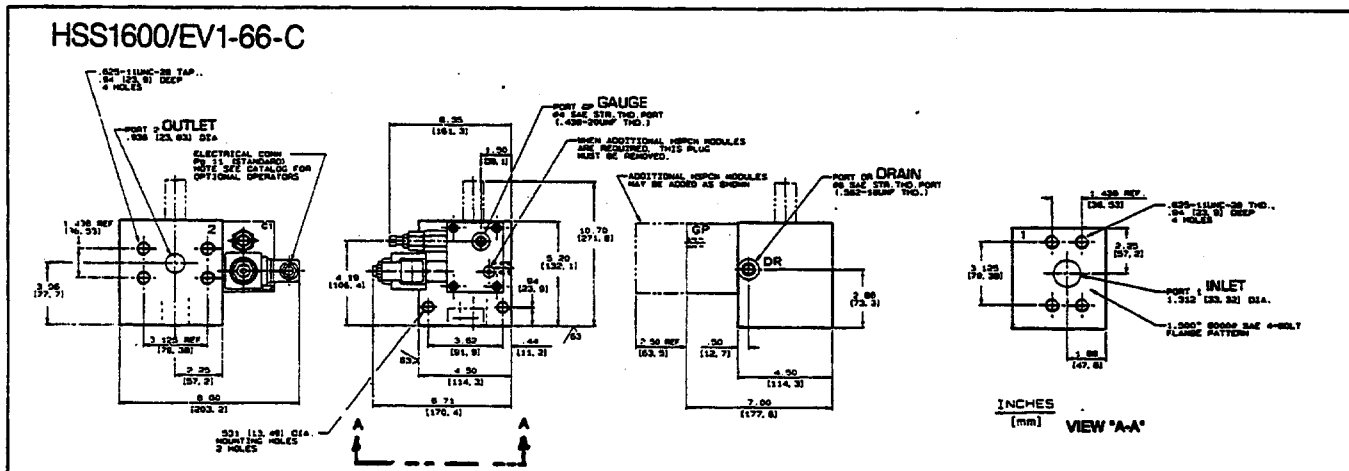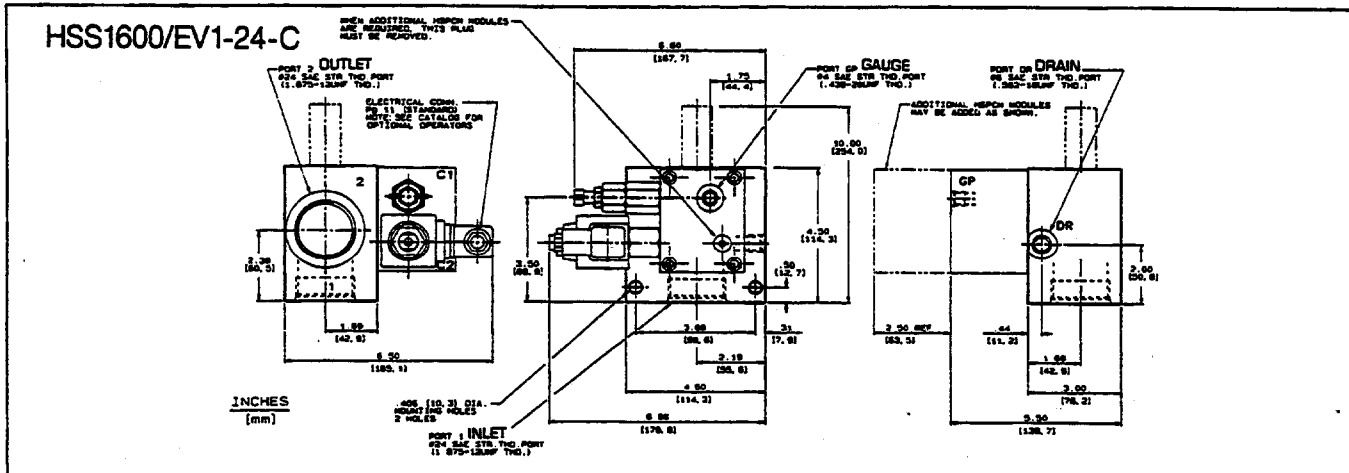

## How To Order

### Screw-In Cartridge Only

HSS1600

### Cartridge With Line Mount Block


3000 psi (207 bar) service pressure  
HSS1600/EV1-24-C\*

5000 psi (345 bar) service pressure  
HSS1600/EV1-66-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

108 USGPM  $\Delta$  100 PSI  
(409,3 LPM  $\Delta$  6,9 Bar)

### HSS1600



#### Data Sheet


#### Sequence Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.


#### Typical HSS1600 How To Order Example

HSS1600 / EV1-24-C / 1-35-4-C / Optional

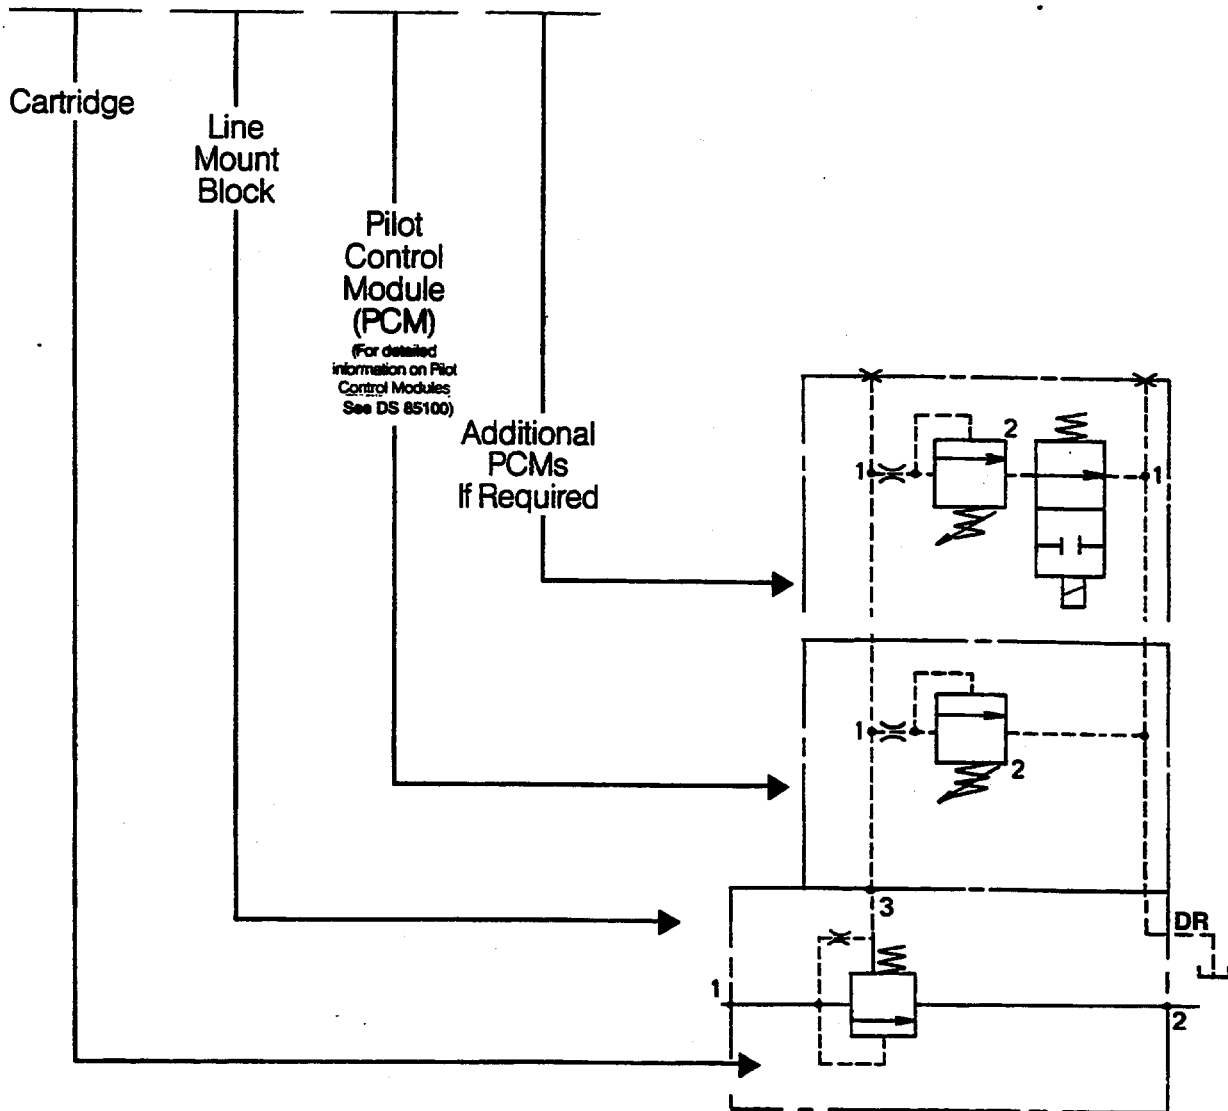

108 USGPM  $\Delta$  100 PSI  
(409,3 LPM  $\Delta$  6,9 Bar)

### HSS1600




#### Data Sheet

#### Sequence Valve for Pilot Operation

## How To Order

### Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C

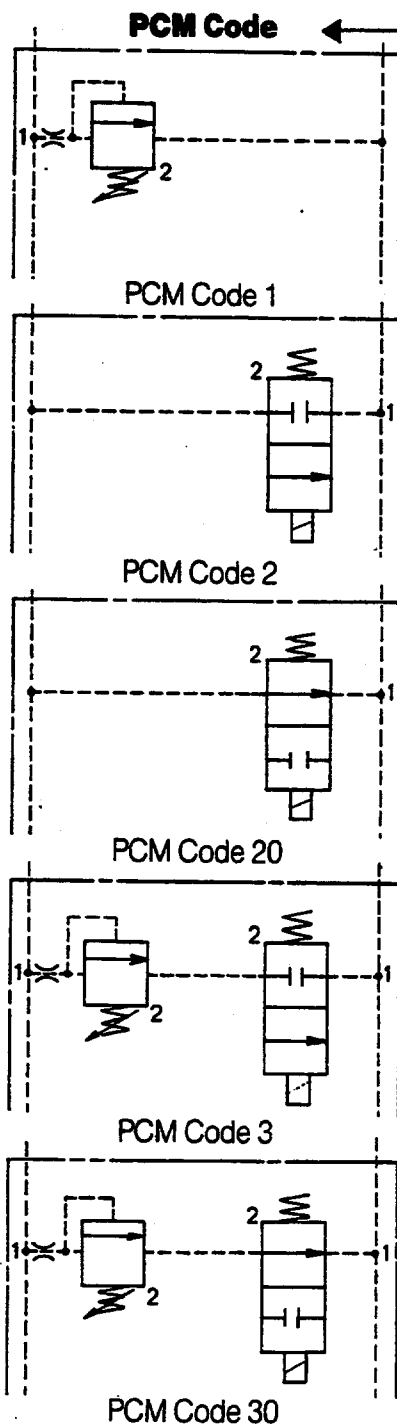

#### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

#### Orifice Diameter

4 = .040 Diameter (Standard)  
See Section "D" for special applications

#### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid  
Other voltages are available, consult factory

#### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


#### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

230 USGPM  $\Delta$  100 PSI  
(871,7 LPM  $\Delta$  6,9 Bar)


## HSS2000



### Data Sheet

### Sequence Valve for Pilot Operation

400296HS

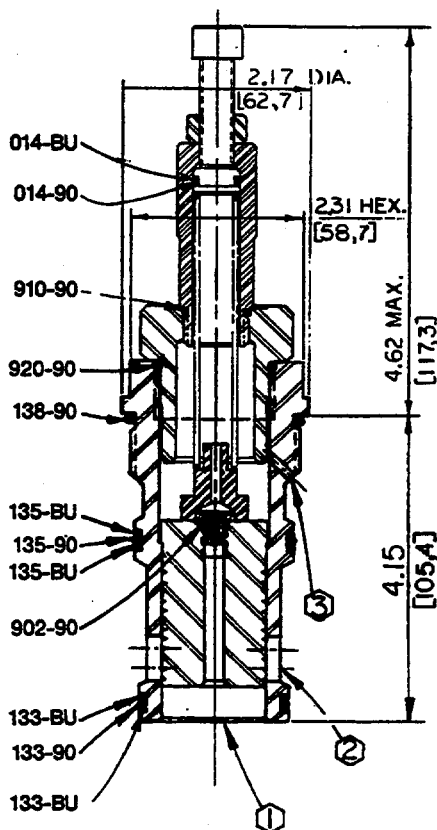

Form Tool Cavity  
HS-2000-3

Line Mount Block  
3000 psi (207 bar) = FY2-38-C  
5000 psi (345 bar) = FY1-68-C

### Application

This HSS cartridge is a precise sequence valve, when operated by a HSLR pilot operator, for sequential (pressure) control in systems where amount of flow may vary. It can also be used as a relief valve where back pressure exists in exhaust line (provided port 2 of HSLR pilot valve is connected directly to reservoir).

### Operation

A HSLR pilot relief valve must be connected via port 3 to the top (spring side) of the main spool. When inlet pressure (ported thru the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow to port 2 allowing operation of a secondary system or flow to drain. Because port 2 of the HSLR pilot valve is not connected to port 2 of the sequence valve, back pressure at sequence valve port 2 does not add to the resistance value of the pilot valve spring and alter the pressure opening valve.

### Features

Thru use of standard pilot (HSLR) relief valves, this valve can provide numerous pre-selected or infinitely variable settings. A trim adjustment is provided to vary the cracking and re-seat pressure.

The HSS cartridge valve is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

### Specifications

Rated flow to— 230 USgpm (871,7 lpm)

Maximum operating pressure—

5000 psi (345 bar)

Adjustable pressure range—See HSLR Pilot Valve, DS 82550-B2.1A

Viscosity range—27-30 SSU at 100°F

35-2000 SSU at 100°F


Seals—Viton

Operating temperature— -40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15

Seal kit-HSSK-2000-C

### Performance Curve

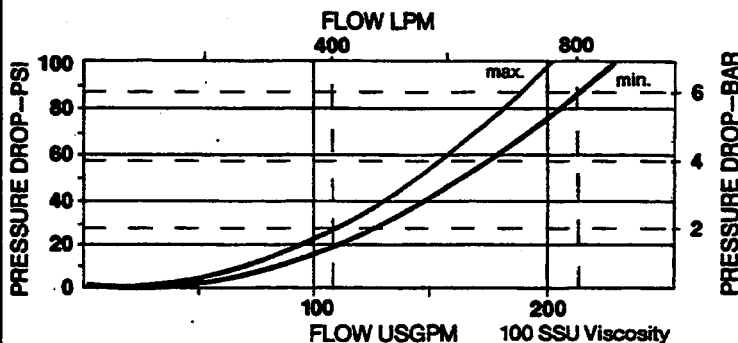




### Sequence Valve for Pilot Operation

**Telephone:** (414) 327-1700  
**Fax:** (414) 327-0532

230 USGPM  $\Delta$  100 PSI  
(871,7 LPM  $\Delta$  6,9 Bar)

## HSS2000



### Data Sheet

### Sequence Valve for Pilot Operation

### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

### Typical HSS2000 How To Order Example


HSS2000 / FY2-38-C / 1-35-4-C / Optional

Cartridge

Line  
Mount  
Block


Pilot  
Control  
Module  
(PCM)  
(For detailed  
information on Pilot  
Control Modules  
See DS 85100)

Additional  
PCMs  
If Required

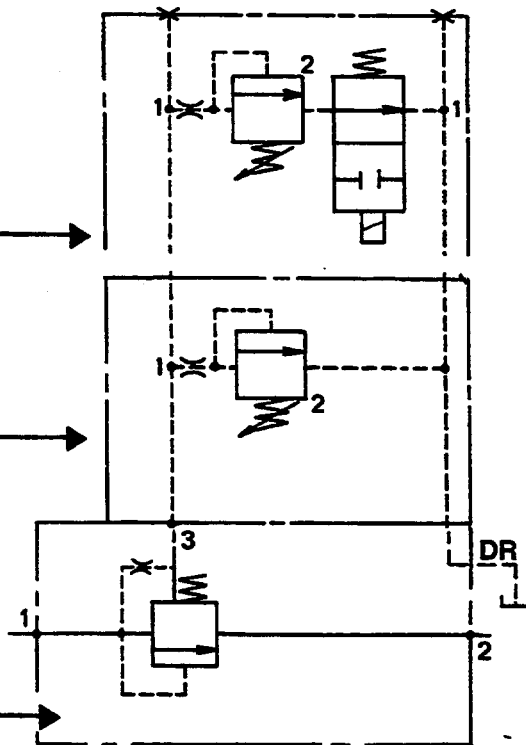

230 USGPM  $\Delta$  100 PSI  
(871,7 LPM  $\Delta$  6,9 Bar)

### HSS2000



Data Sheet


Sequence Valve for Pilot Operation

## How To Order


Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C


### PCM Code

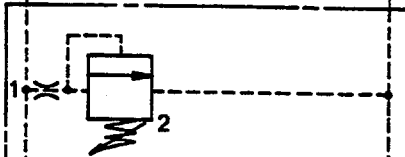


PCM Code 1

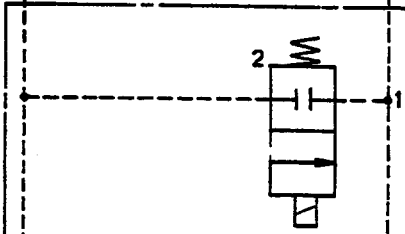


PCM Code 2

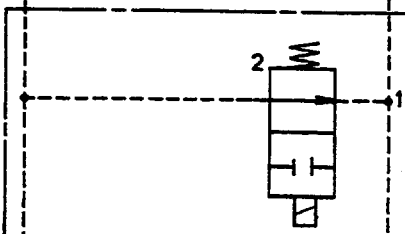

PCM Code 20

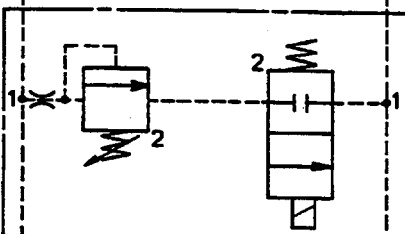

PCM Code 3

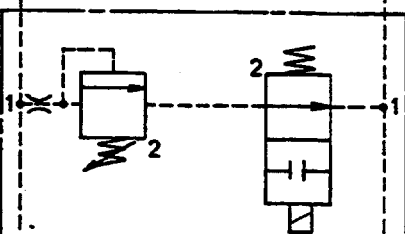

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4-138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid  
Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

39 USGPM  $\Delta$  100 PSI  
(147,8 LPM  $\Delta$  6,9 Bar)


### HSU1201



Data Sheet

Normally Closed Sequence Valve for Pilot Operation

400319HS

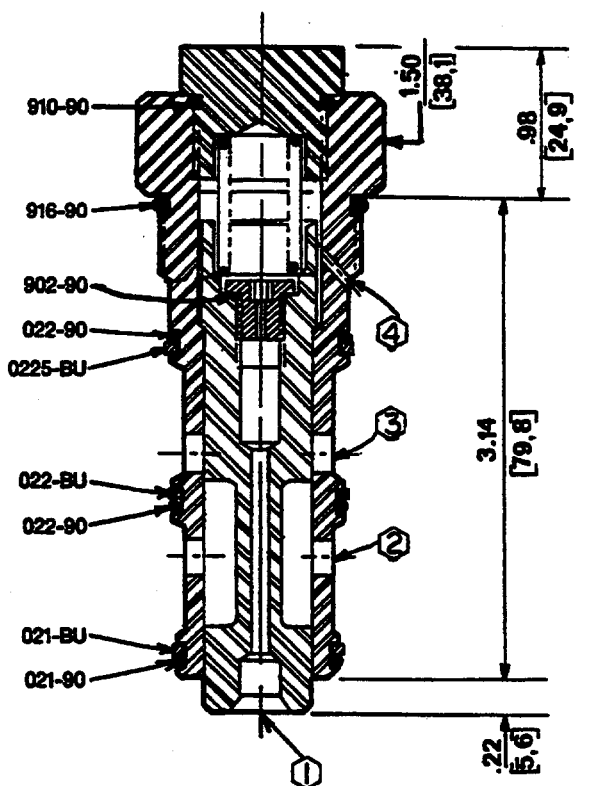

Form Tool Cavity  
HB-1200-4

Line Mount Block  
DT1-16-C

### Application

When operated by a HSLR pilot operator the HSU sequence valve connects primary and secondary system branches after the pressure requirement in a third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings.

### Operation

A HSLR pilot relief valve must be connected via port 4 to the top (spring side) of the main spool and pressure must be connected to port 1 to operate the relief valve which pilots the sequence valve to connect ports 2 and 3. When inlet pressure (ported through the valve) exceeds the pilot relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow between ports 2 and 3.


### Features

The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

### Specifications


- Rated flow to 39 USgpm (147,8 lpm)
- Maximum operating pressure- 5000 psi (345 bar)
- Adjustable pressure range- See HSLR Pilot Valve (Section 5, page B1.1 and B2.1)
- Viscosity range- 27-30 SSU at 100°F
- 35- 2000 SSU at 100°F
- Seals- Viton
- Operating temperature- -40°F to 350°F (-39,6°C to 175°C)
- Filtration- Maintain SAE Class, 6, ISO 18/15
- Seal kit - HSSK-1200-D

### Performance Curve

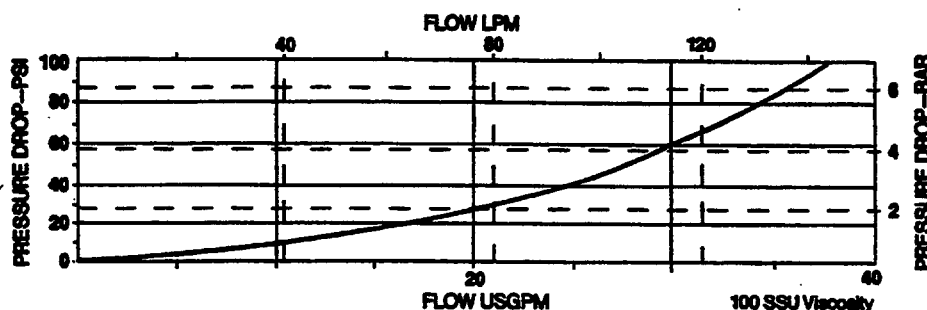

39 USGPM  $\Delta$  100 PSI  
(147,8 LPM  $\Delta$  6,9 Bar)

## HSU1201




### Data Sheet

### Normally Closed Sequence Valve for Pilot Operation

### Line Mount Specifications

HSU1201/DT1-16-C

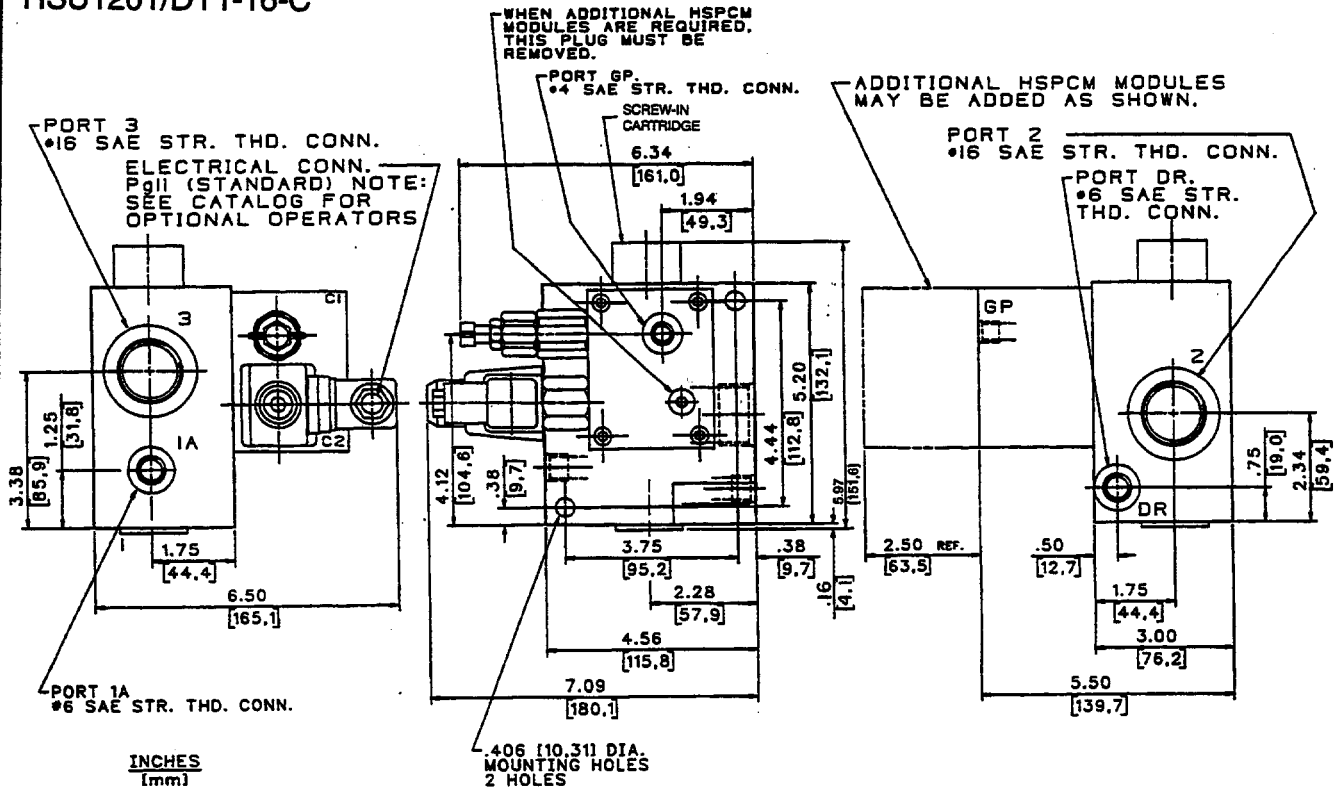

## How To Order

### Screw-In Cartridge Only

HSU1201


### Cartridge With Line Mount Block

HSU1201/DT1-16-C \*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for How To Order Line Mount Blocks with Pilot Control Modules.

39 USGPM  $\Delta$  100 PSI  
(147,8 LPM  $\Delta$  6,9 Bar)

### HSU1201



#### Data Sheet


#### Normally Closed Sequence Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.


#### Typical HSU1201 How To Order Example

HSU1201 / DT1-16-C / 1-35-4-C / Optional

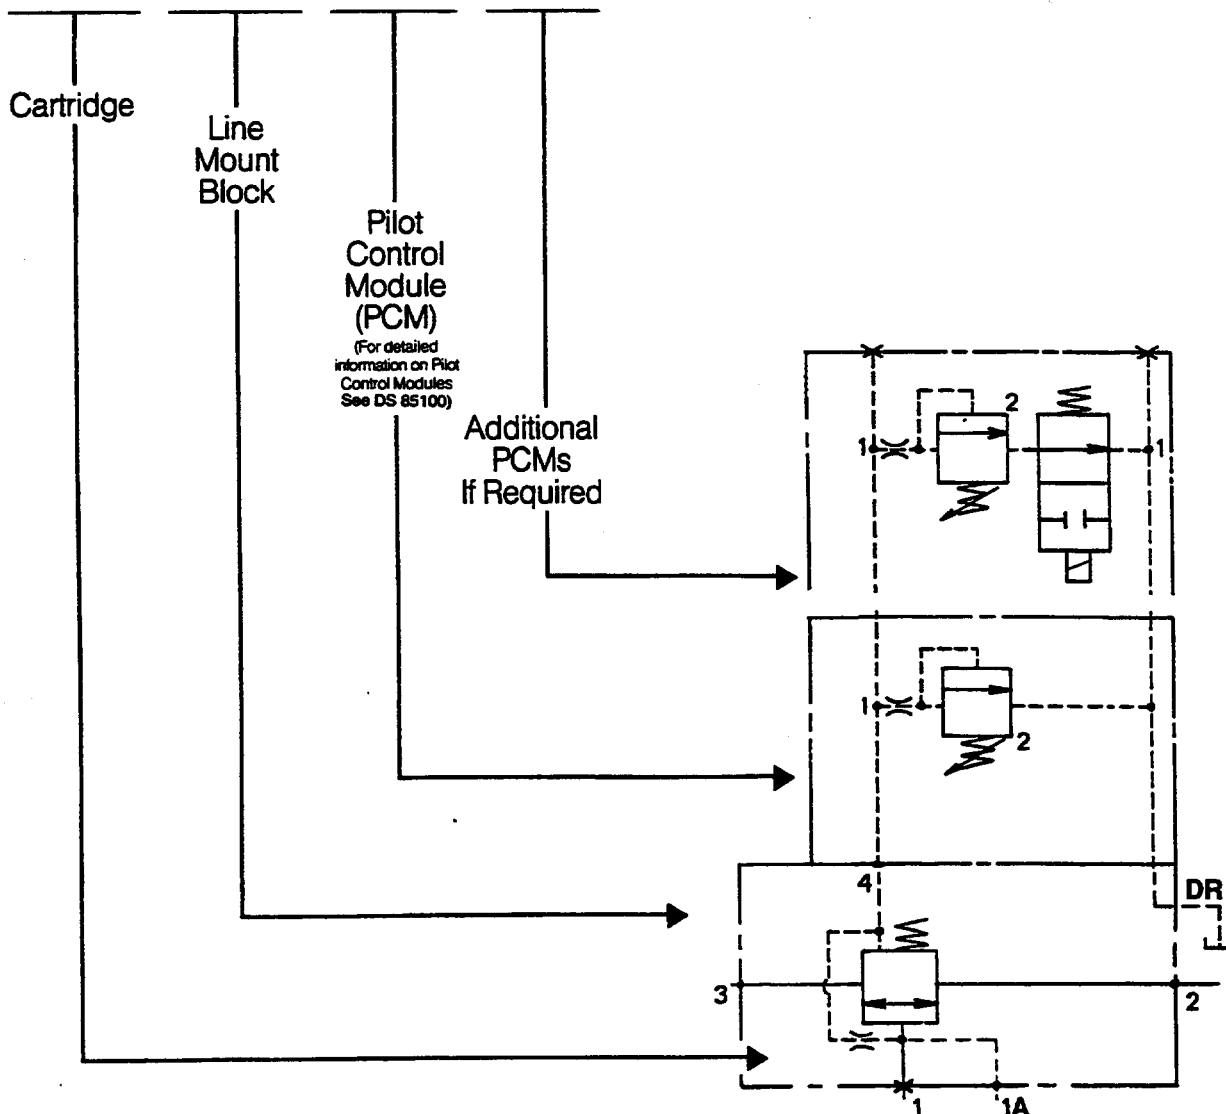

39 USGPM  $\Delta$  100 PSI  
(147,8 LPM  $\Delta$  6,9 Bar)

## HSU1201




Data Sheet

Normally Closed Sequence Valve for Pilot Operation

## How To Order


Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C

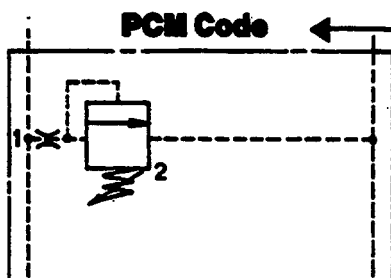


PCM Code


PCM Code 1

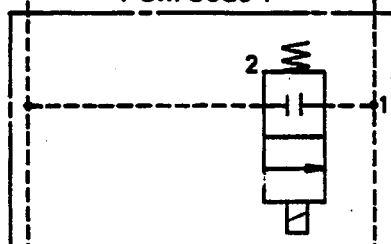


PCM Code 2

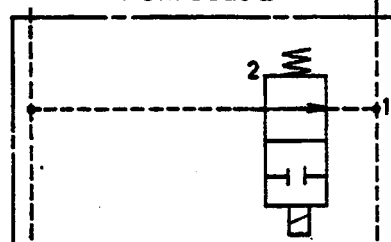

PCM Code 20

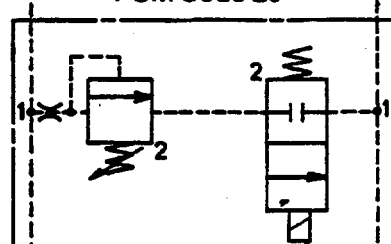

PCM Code 3

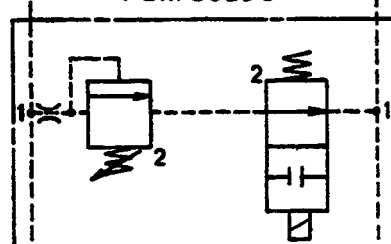

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)


### HSU2000



#### Data Sheet

#### Normally Closed Sequence Valve, for Pilot Operation

500016HS

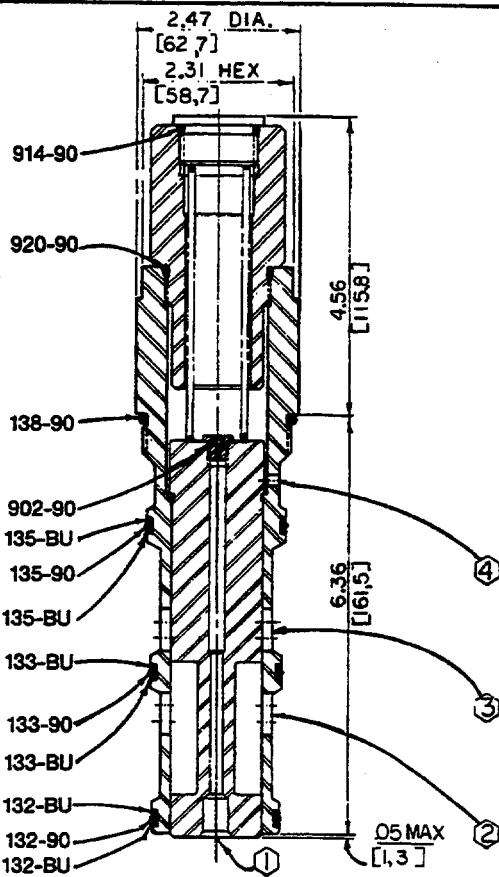

Form Tool Cavity  
HS-2000-4

Line Mount Block  
3000 psi (207 bar) = FZ1-38-C  
5000 psi (345 bar) = FZ1-68-C

#### Application

When operated by a HSLR pilot operator, the HSU sequence valve connects primary and secondary system branches after the pressure requirement in a third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings

#### Operation

A HSLR pilot relief valve must be connected via port 4 to top (spring side) of the main spool and pressure must be connected to port 1 to operate the relief valve which pilots the sequence valve to connect ports 2 and 3. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to allow flow between ports 2 and 3.

#### Features

The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

#### Specifications

Rated flow to- 170 USgpm (644,3 lpm)

Maximum operating pressure—

5000 psi (345 bar)

Adjustable pressure range— See HSLR

Pilot Valve DS 82550- B1.1A & B2.1A

Viscosity range - 27- 30 SSU at 100°F

35 - 2000 SSU at 100°F

Seals—Viton


Operating temperature- -40°F to 350°F

(-39,6°C to 175°C)

Filtration— Maintain SAE Class 6, ISO 18/15

Seal kit- HSSK-2000D


#### Performance Curve

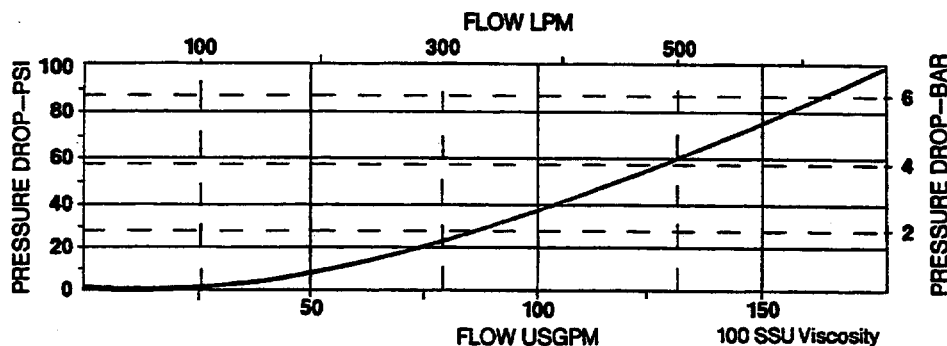



170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)



### HSU2000



#### Data Sheet

#### Normally Closed Sequence Valve, for Pilot Operation

#### Line Mount Specifications

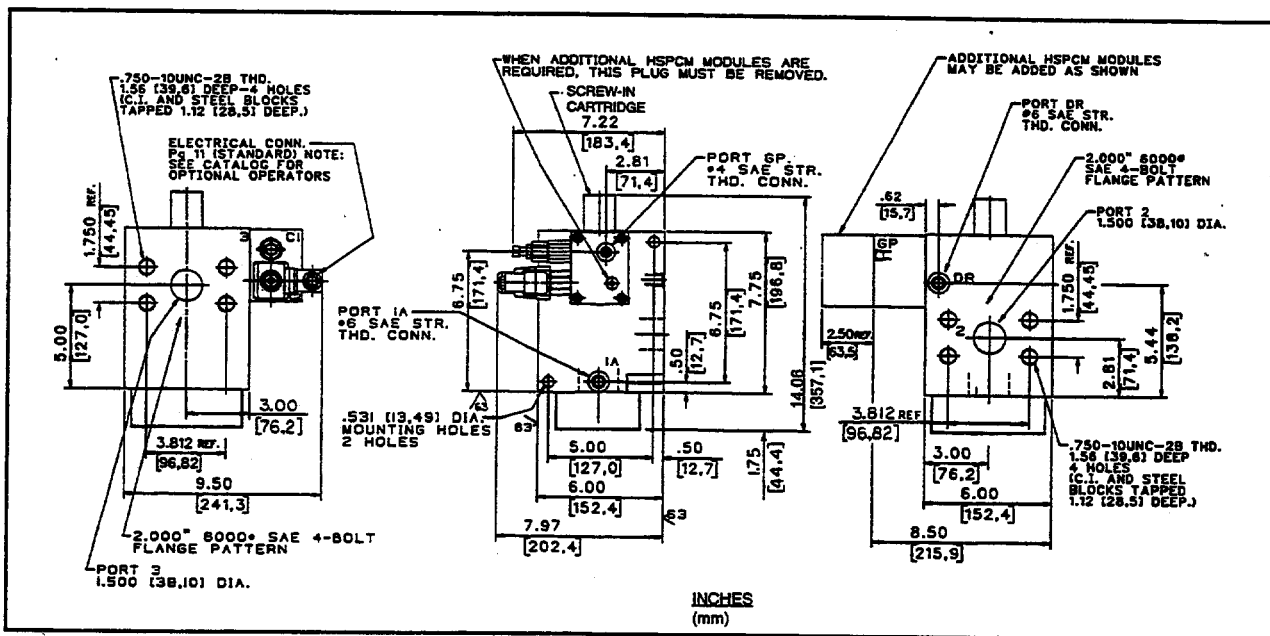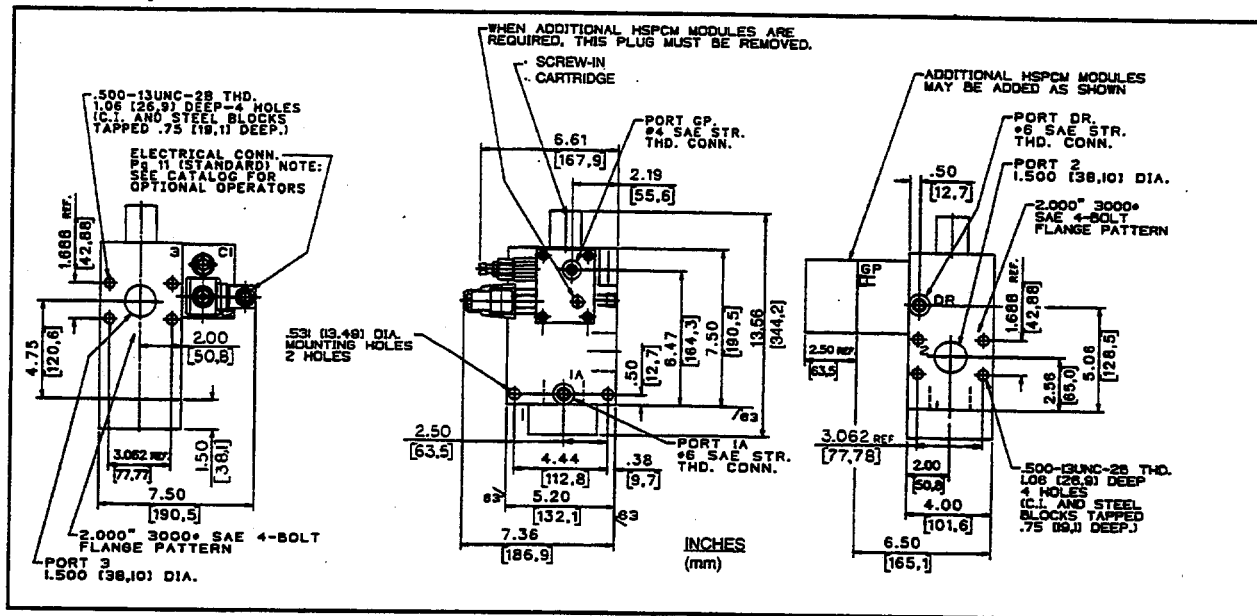

#### How To Order

##### Screw-In Cartridge Only

HSU2000

##### Cartridge With Line Mount Block

HSU2000/FZ1-38-C\*

3000 psi (207 bar) service pressure


HSU2000/FZ1-68-C\*

5000 psi (345 bar) service pressure

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

**170 USGPM  $\Delta$  100 PSI**  
**(644,3 LPM  $\Delta$  6,9 Bar)**

# HSU2000



## Data Sheet


### Normally Closed Sequence Valve, for Pilot Operation

## Cartridge Must Have Pilot Control Module

**This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.**


### Typical HSU2000 How To Order Example

HSU2000 / FZ1-38-C / 1-35-4-C / Optional

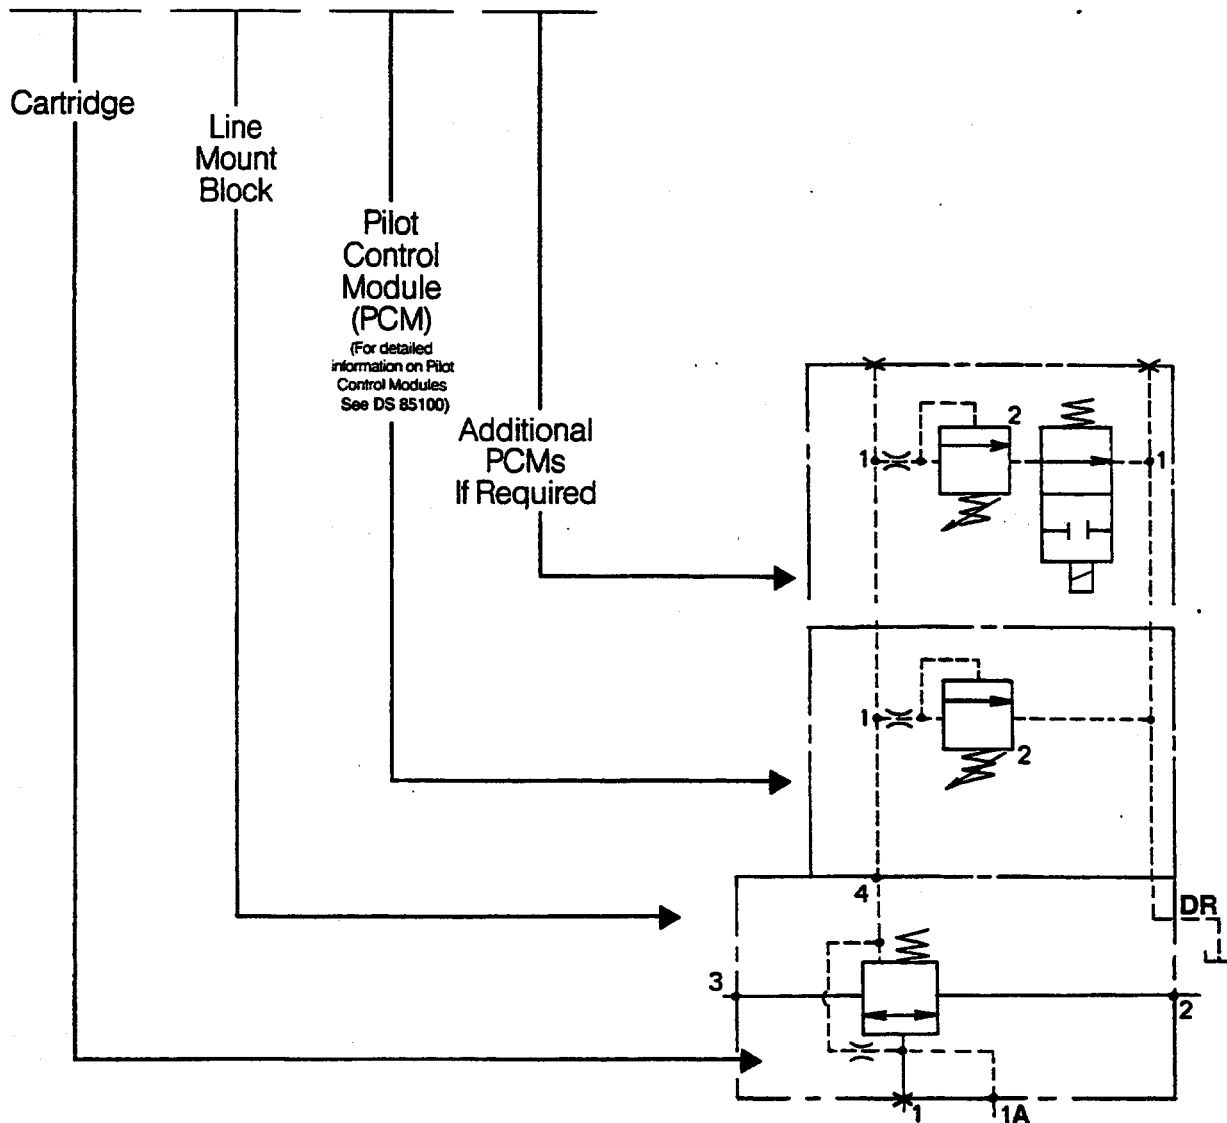

170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)

### HSU2000



Data Sheet


Normally Closed Sequence Valve, for Pilot Operation

## How To Order


Typical PCM How To Order Example:

/ 1 - 35 - 4 - 0W - C


### PCM Code

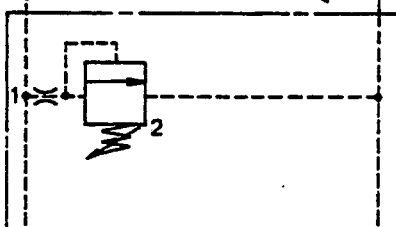


PCM Code 1

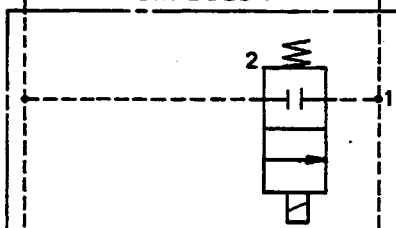


PCM Code 2

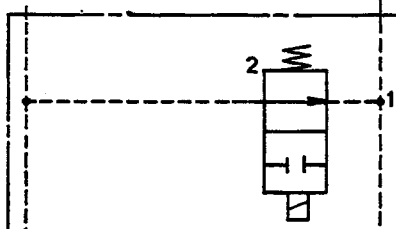

PCM Code 20

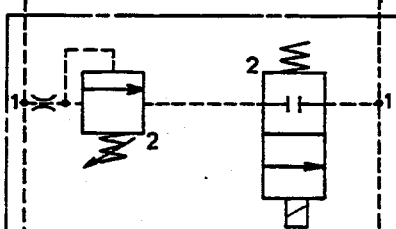

PCM Code 3

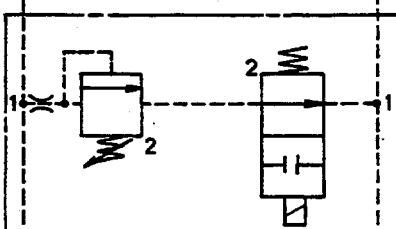

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4-138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid  
Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

37 USGPM  $\Delta$  100 PSI  
(140,2 LPM  $\Delta$  6,9 Bar)


### HSUO1201



#### Data Sheet

#### Normally Open Sequence Valve for Pilot Operation

400320HS

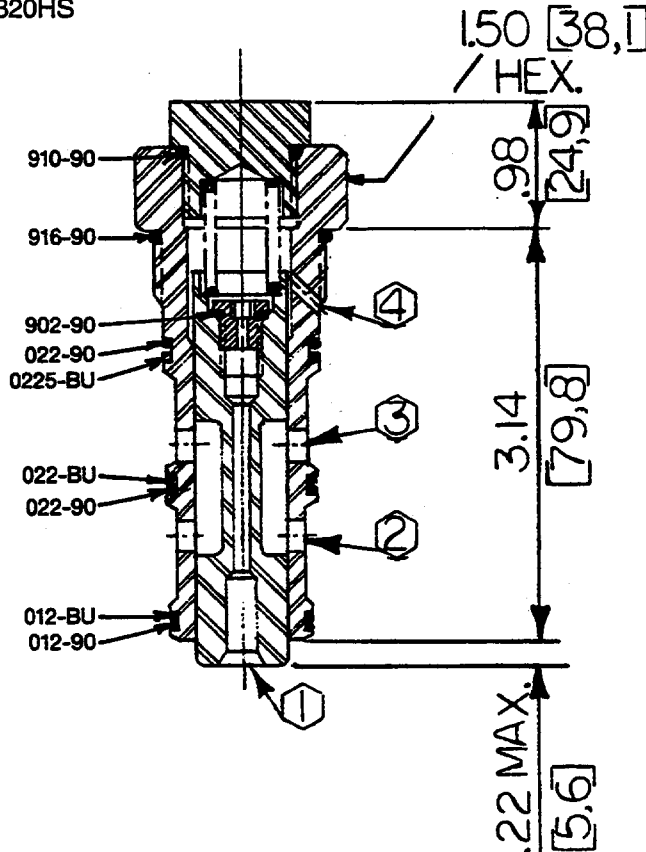

Form Tool Cavity  
HS-1200-4

Line Mount Block  
DT1-16-C

#### Application

When operated by a HSLR pilot operator, the HSUO sequence valve disconnects primary and secondary system branches after the pressure requirement in third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings or vented to close it.

#### Operation

A HSLR pilot relief valve must be connected via port 4 to top (spring side) of the main spool and pressure must be connected to port 1 to operate the relief valve which pilots the sequence valve to block flow between pods 2 and 3. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to block flow between ports 2 and 3.

#### Features

Several pressure ranges are available to choose from. The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or repair.

#### Specifications

Rated flow to-51 USgpm 200 psi  
(193,1 lpm 13,8 bar)

Maximum operating pressure-  
5000 psi (345 bar)

Adjustable pressure range-See HSLR602  
Pilot Valve (Section 5, page B2.1)


Viscosity range-27 to 30 SSU at 100°F  
35 to 2000 SSU at 100°F

Seals-Viton

Operating temperature- -40°F to 350°F  
(-39,6°C to 175°C)


Filtration-Maintain SAE Class 6, ISO 18/15  
Seal kit-HSSK-1200-D

#### Performance Curve

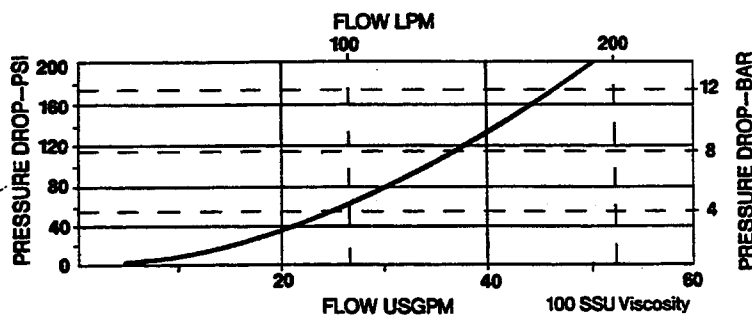

37 USGPM  $\Delta$  100 PSI  
(140,2 LPM  $\Delta$  6,9 Bar)

### HSU01201




### Data Sheet

### Normally Open Sequence Valve for Pilot Operation

### Line Mount Specifications

#### HSU01201/DT1-16-C

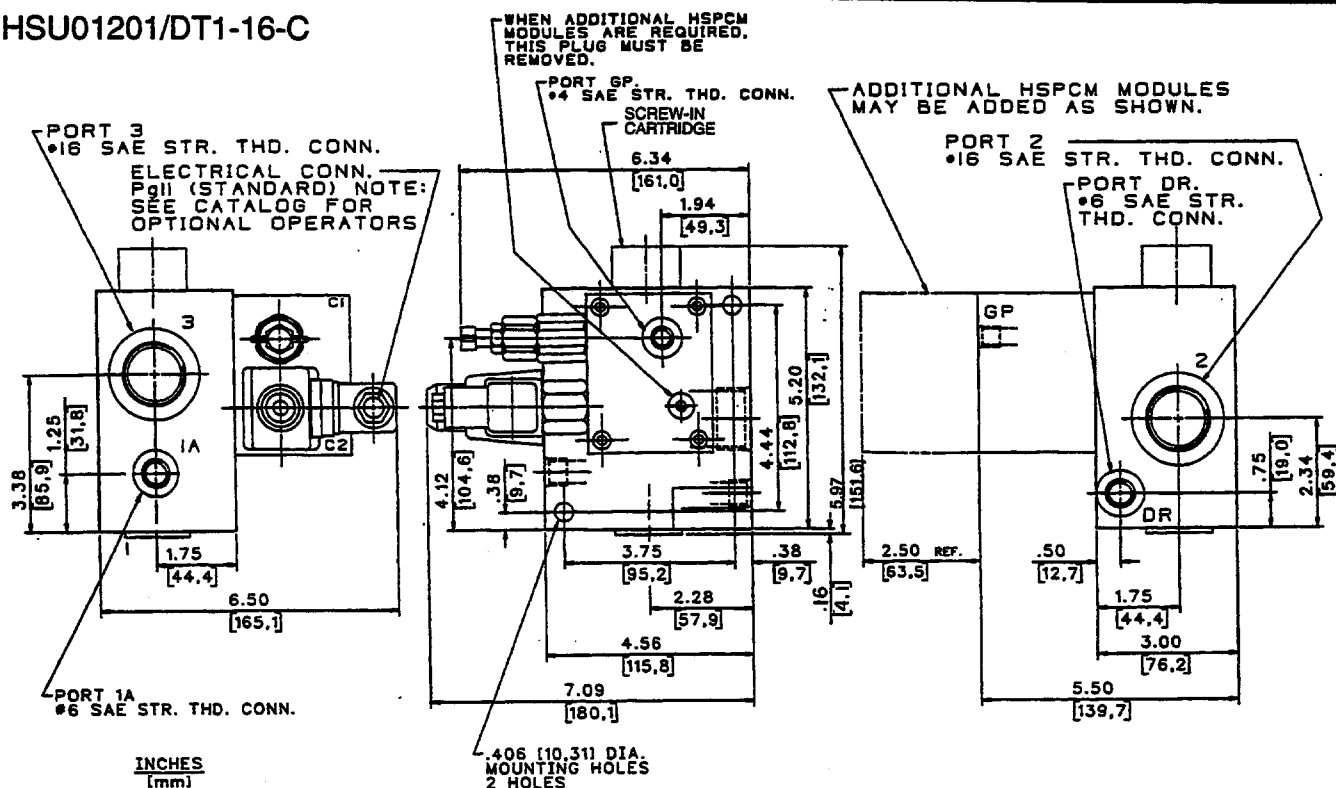

## How To Order

### Screw-In Cartridge Only

HSU01201


### Cartridge With Line Mount Block

HSU01201/DT1-16-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM).  
See pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

37 USGPM  $\Delta$  100 PSI  
(140,2 LPM  $\Delta$  6,9 Bar)

### HSUO1201



#### Data Sheet


#### Normally Open Sequence Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.


#### Typical HSUO1201 How To Order Example

HSUO1201 / DT1-16-C / 1-35-4-C / Optional

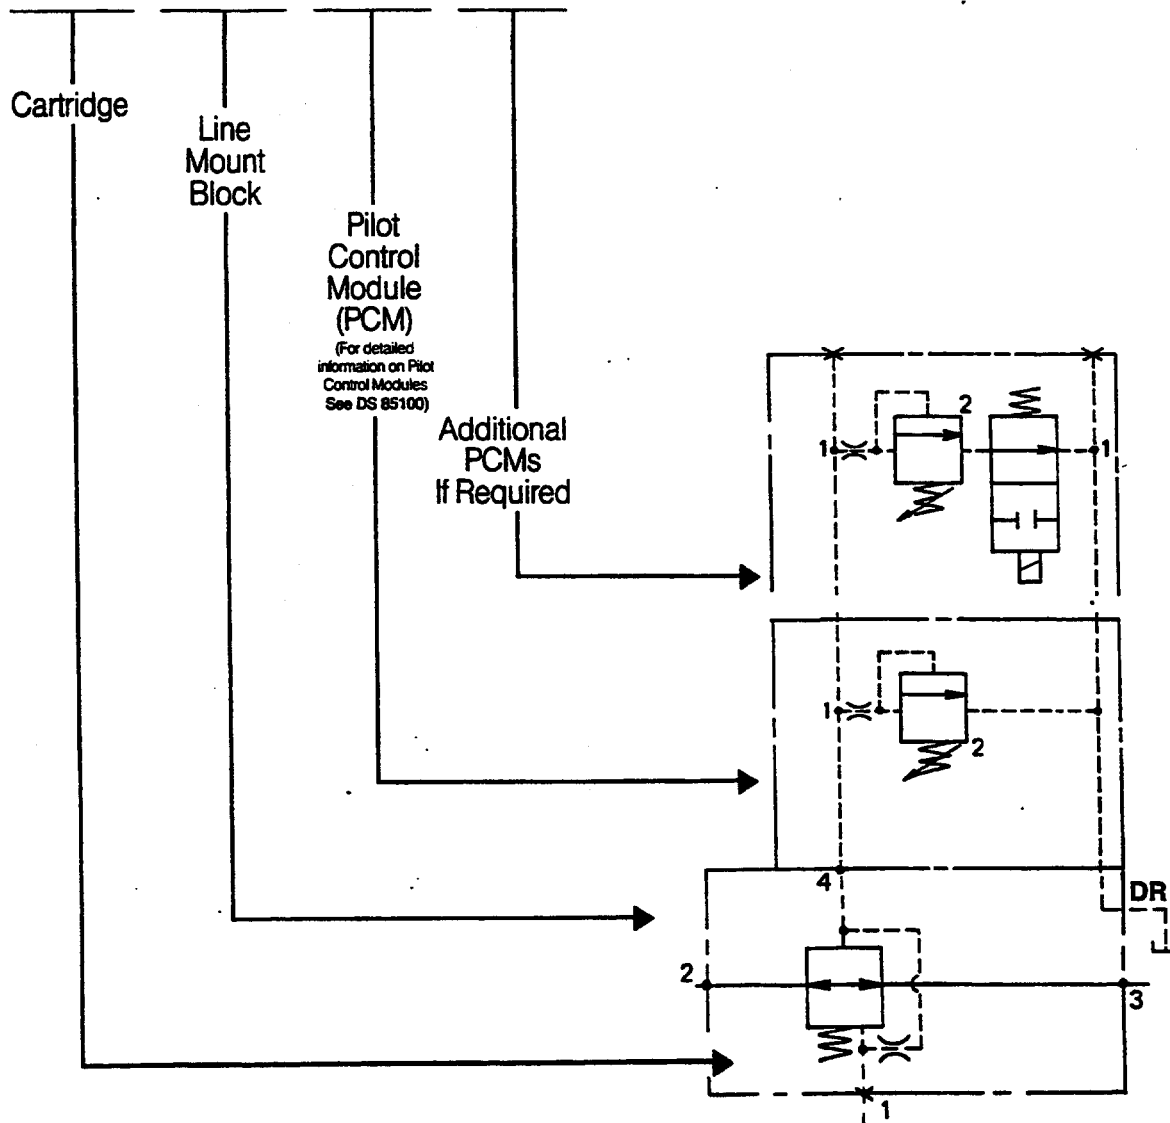

37 USGPM  $\Delta$  100 PSI  
(140,2 LPM  $\Delta$  6,9 Bar)

### HSUO1201



#### Data Sheet


#### Normally Open Sequence Valve for Pilot Operation

## How To Order


### Typical PCM How To Order Example:

/30 - 35 - 4 - 0W - C


#### PCM Code

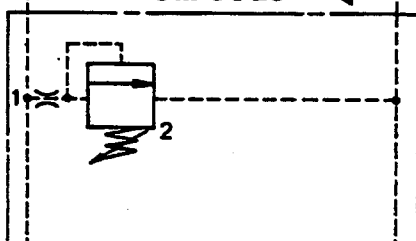


PCM Code 1

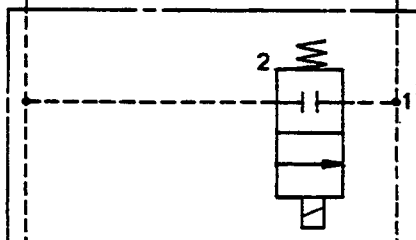


PCM Code 2

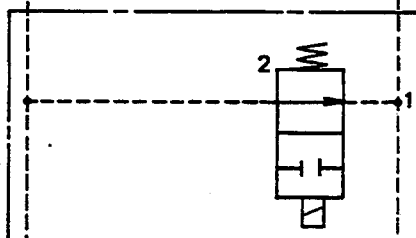

PCM Code 20

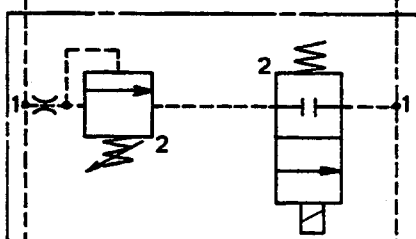

PCM Code 3

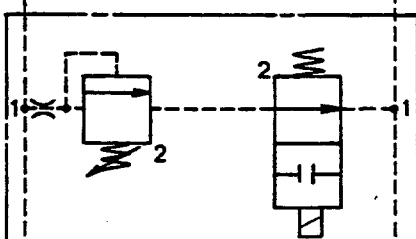

PCM Code 30

#### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

#### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for special applications

#### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

#### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


#### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)


### HSUO2000



#### Data Sheet

#### Normally Open Sequence Valve for Pilot Operation

500017HS

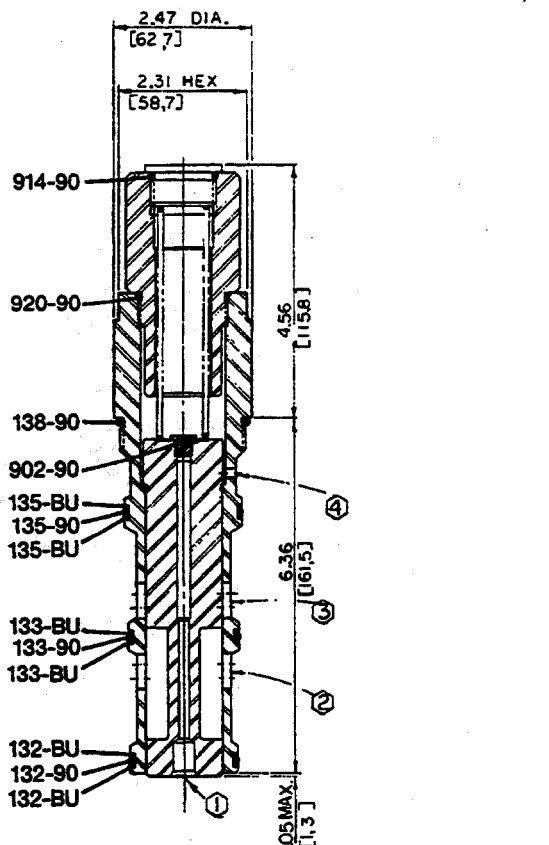

Form Tool Cavity  
HS-2000-4

Line Mount Block  
3000 psi (207 bar) = FZ1-38-C  
5000 psi (345 bar) = FZ1-68-C

#### Application

When operated by a HSLR pilot operator, the HSUO sequence valve disconnects primary and secondary system branches after the pressure requirement in third branch has been satisfied. This valve can be circuited to be operated by multiple pressure settings or vented to close it.

#### Operation

A HSLR pilot relief valve must be connected via port 4 to top (spring side) of the main spool and pressure must be connected to port 1 to operate the relief valve which pilots the sequence valve to block flow between ports 2 and 3. When inlet pressure (ported through the valve) exceeds the pilot setting, pressure on top side of the spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the spool to block flow between ports 2 and 3.

#### Features


Several pressure ranges are available to choose from. The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or repair.

#### Specifications

Rated flow to- 240 USgpm  $\Delta$  2000 psi  
(908,6 lpm  $\Delta$  13,8 bar)  
Maximum operating pressure—  
5000 psi (345 bar)  
Adjustable pressure range— See HSLR  
Pilot Valve DS 82550-B2.1A  
Viscosity range - 27- 30 SSU at 100°F  
35 - 2000 SSU at 100°F

Seals—Viton  
Operating temperature- -40°F to 350°F  
(-39,6°C to 175°C)  
Filtration— Maintain SAE Class 6, ISO 18/15  
Seal kit- HSSK-2000D


#### Performance Curve

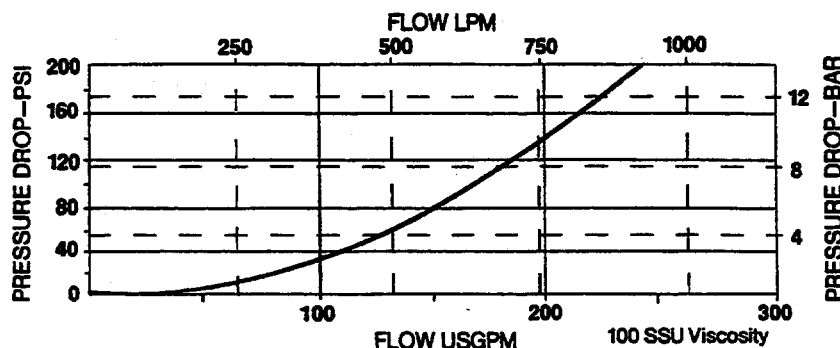



170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)



### HSUO2000



#### Data Sheet

#### Normally Open Sequence Valve for Pilot Operation

#### Line Mount Specifications

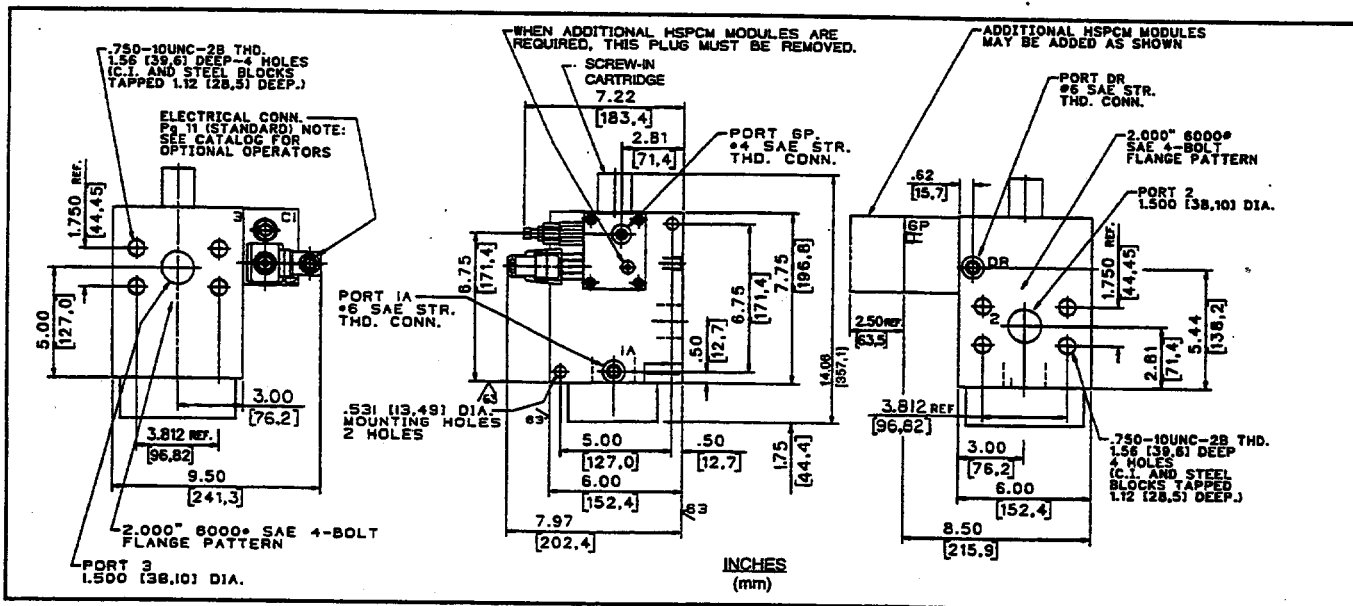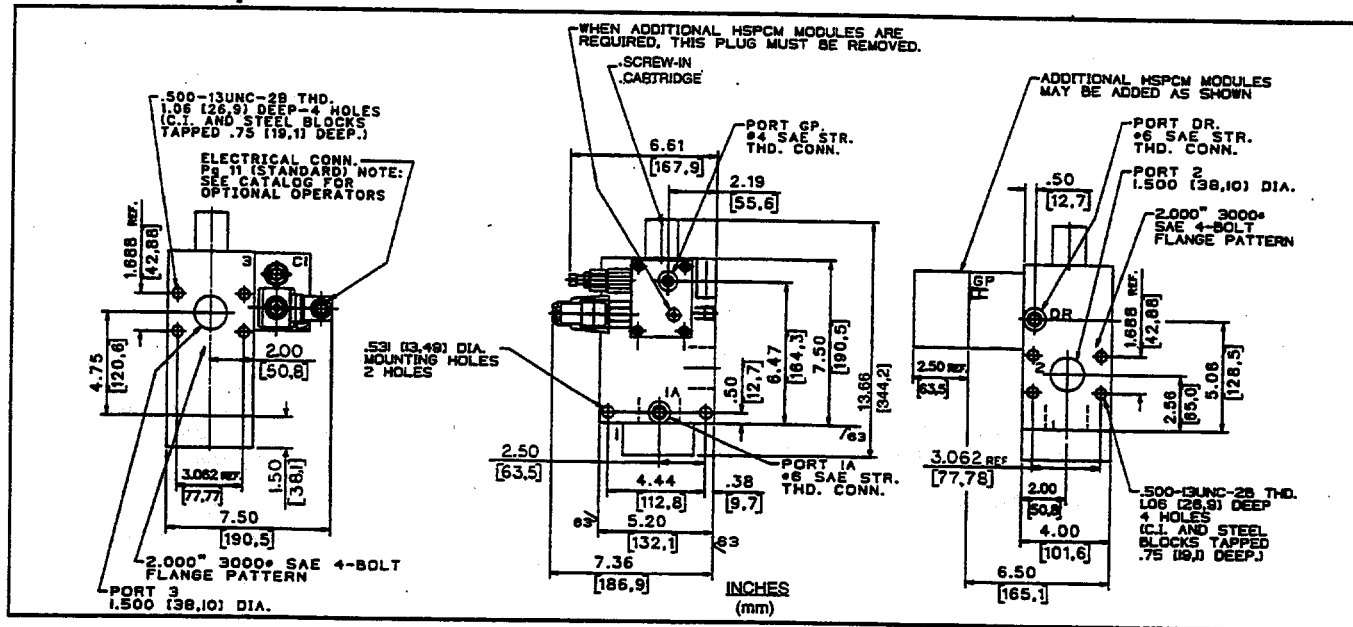

#### How To Order

#### Screw-In Cartridge Only

HSUO2000

#### Cartridge With Line Mount Block


3000 psi (207 bar) service pressure  
HSUO2000/FZ1-38-C\*

5000 psi (345 bar) service pressure  
HSUO2000/FZ1-68-C\*

\*Line Mount Blocks shown include Pilot Control Modules (PCM). See Pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)

### HSUO2000



#### Data Sheet

#### Normally Open Sequence Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

#### Typical HSUO2000 How To Order Example


HSUO2000 / FZ1-38-C / 1-35-4-C / Optional

Cartridge

Line  
Mount  
Block


Pilot  
Control  
Module  
(PCM)  
(For detailed  
information on Pilot  
Control Modules  
See DS 85100)

Additional  
PCMs  
If Required

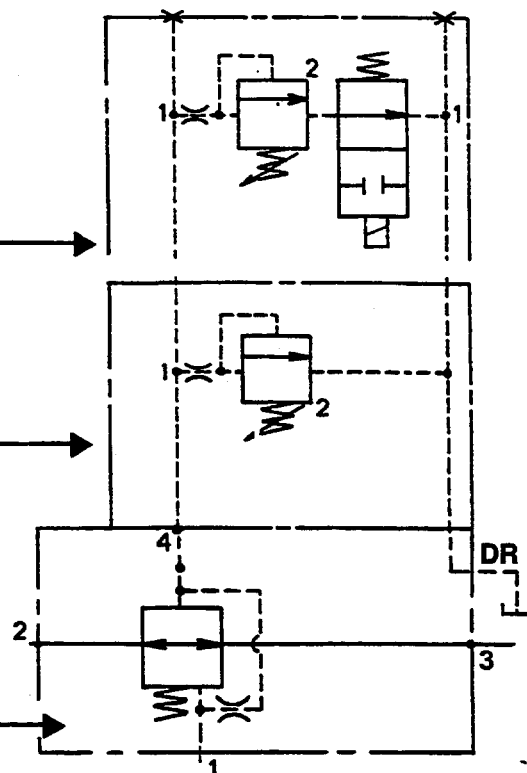

170 USGPM  $\Delta$  100 PSI  
(644,3 LPM  $\Delta$  6,9 Bar)

### HSUO2000



Data Sheet


Normally Open Sequence Valve for Pilot Operation

## How To Order


Typical PCM How To Order Example:

/30 - 35 - 4 - 0W - C


### PCM Code

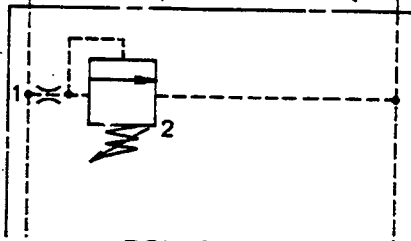


PCM Code 1

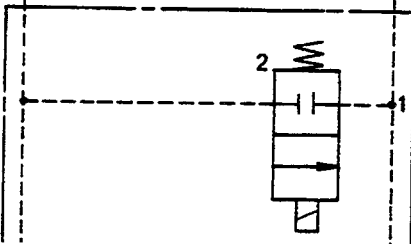


PCM Code 2

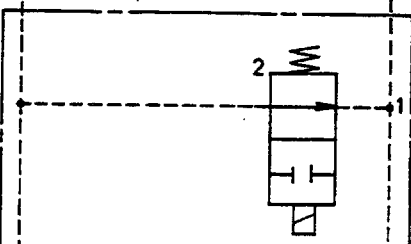

PCM Code 20

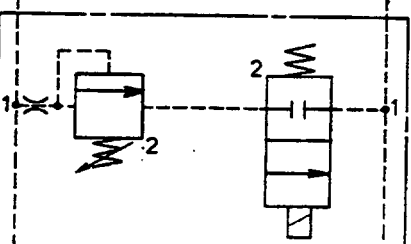

PCM Code 3

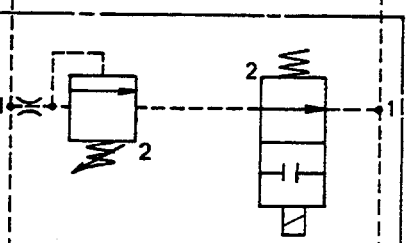

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4- 138,0 bar)  
35 = 50-3500 psi (3,4- 241,0 bar)  
50 = 50-5000 psi (3,4- 345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for special applications

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid

Other voltages are available, consult factory

### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

16 USGPM  $\Delta$  100 PSI  
(60,6 LPM  $\Delta$  6,9 Bar)


### HSU801-P



Data Sheet

Normally Closed External Pilot Sequence Valve

400822HS

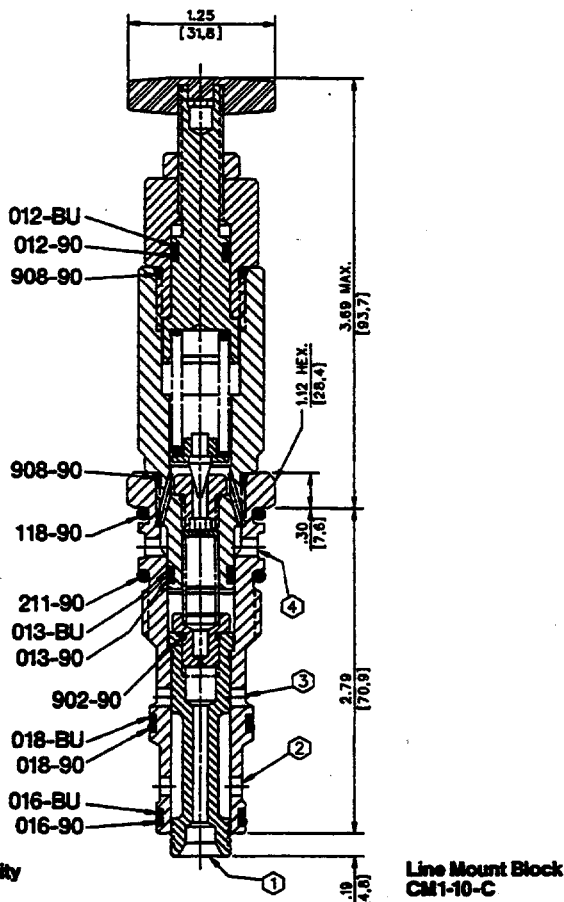

### Application

The HSU sequence valve connects primary and secondary system branches after the pressure requirement in a third branch is satisfied.

### Operation

Pressure must be connected to port 1 to operate the integral relief valve which pilots the sequence valve to connect ports 2 and 3. Port 1 pressure is ported thru orifices in the center of the valve to the pilot relief valve (in upper portion of the body). When this pressure exceeds the valve setting, pressure on the top side of the main spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the main spool allowing flow between ports 2 and 3.

### Features


Several pressure ranges are available to choose from. The cartridge is constructed of steel parts and all operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

### Specifications

Rated flow to—16 USgpm (60,6 lpm)  
Maximum operating pressure—  
5000 psi (345 bar)  
Adjustable pressure range—See "How To Order"  
Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F


Seals—Viton  
Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)  
Filtration—Maintain SAE Class 6, ISO 18/15  
Seal kit—HSSK-800-D

### Performance Curve

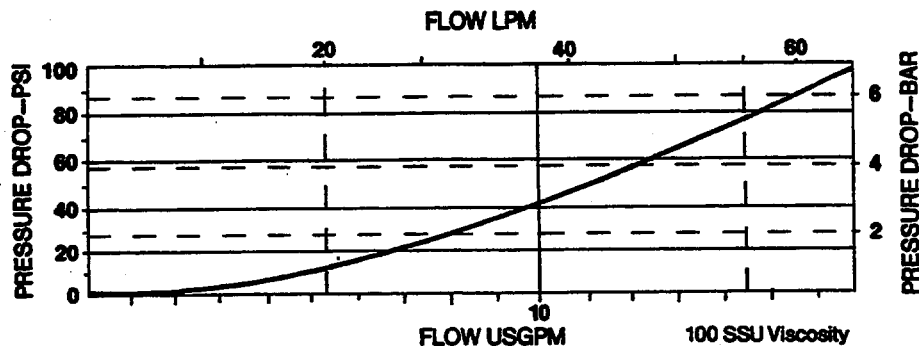

16 USGPM  $\Delta$  100 PSI  
(60,6 LPM  $\Delta$  6,9 Bar)

### HSU801-P




Data Sheet

Normally Closed External Pilot Sequence Valve

### Line Mount Specifications

HSU801-P/CM1-10-C

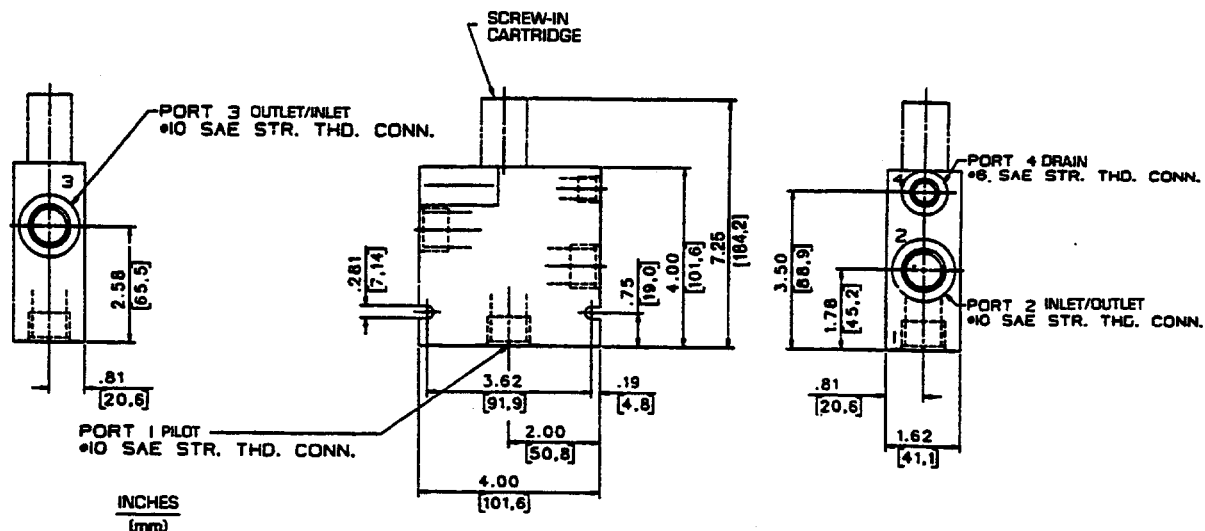

### How To Order

#### Screw-In Cartridge Only


HSU801-P-

	Pressure Range	
	psi	bar
07	50- 700	3,4- 48
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345

Note: All adjusting screw options on DS 82550-1B are available for this valve.

#### Cartridge With Line Mount Block


HSU801-P-\_\_\_/CM1-10-C

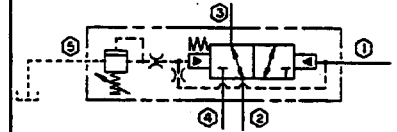

### Data Sheet

### Three Way External Piloted Sequence Valve

400861HS

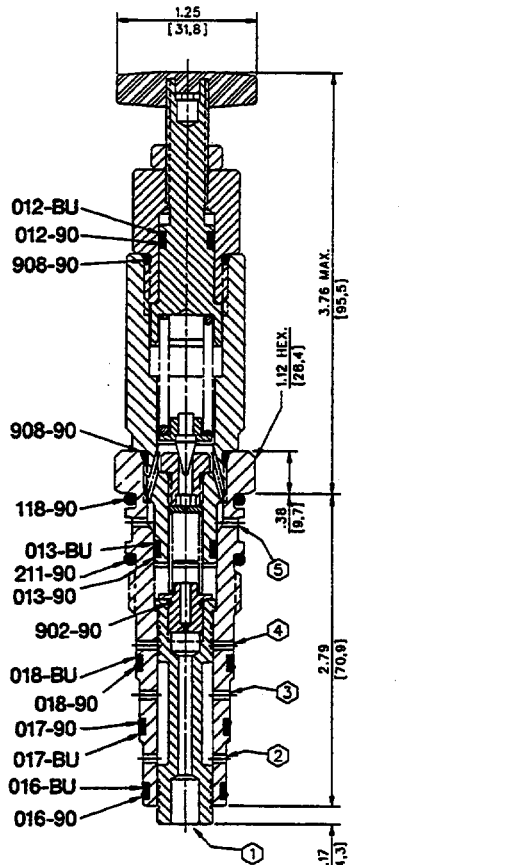

Form Tool Cavity  
HS-800-5

Line Mount Block  
CN1-10-C

### Application

The HSUCO valve is primarily a pilot valve used to control large flow HSU, HSUO or HSP valves.

### Operation

Pilot pressure must be connected to port 1 to operate the integral relief valve which pilots the sequence valve to connect port 2 to port 3 or port 4 to port 3. Port 1 pressure is ported thru orifices in the center of the valve to the pilot relief valve (in upper portion of the body). When the pressure exceeds this valve setting, pressure on the top side of the main spool is relieved, a pressure imbalance then exists across the main spool and port 1 pressure raises the main spool blocking port 2 and allowing flow from port 4 to port 3. When pilot pressure (at port 1) decreases, the pilot relief valve blocks flow. Pressure across the main spool is balanced and spring returns main spool to block port 4 and connect 2 to 3 once again.

### Features

Several pressure ranges are available to choose from. The cartridge is constructed of steel parts and operating parts are hardened and ground as required. Cartridge is designed for easy service or field repair.

### Specifications

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—See "How To Order"


Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F

Seals—Viton

Operating temperature—-40°F to 350°F  
(-39.6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15

Seal kit—HSSK-800-O

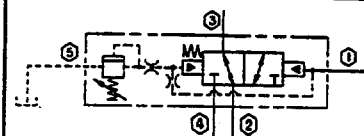


#### Data Sheet

#### Three Way External Piloted Sequence Valve

### Line Mount Specifications

HSUCO800/CN -10-C

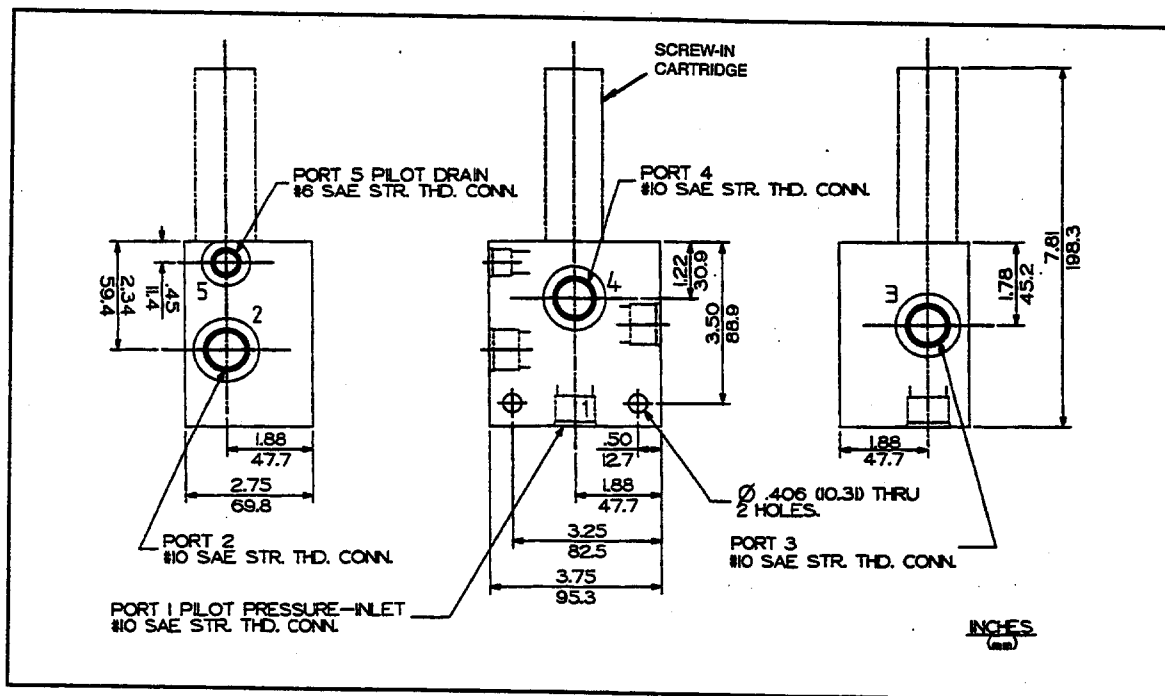

### How To Order

#### Screw-In Cartridge Only

HSUCO800-P-


	Pressure Range	
	psi	bar
07	50- 700	3,4- 48
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345

#### Cartridge With Line Mount Block

HSUCO800-P-\_\_ /CN1-10-C

22 USGPM  $\Delta$  100 PSI  
(83,4 LPM  $\Delta$  6,9 Bar)


### HSPR801-P



#### Data Sheet

#### Piloted Sleeve Pressure Reducing Valve

400826HS

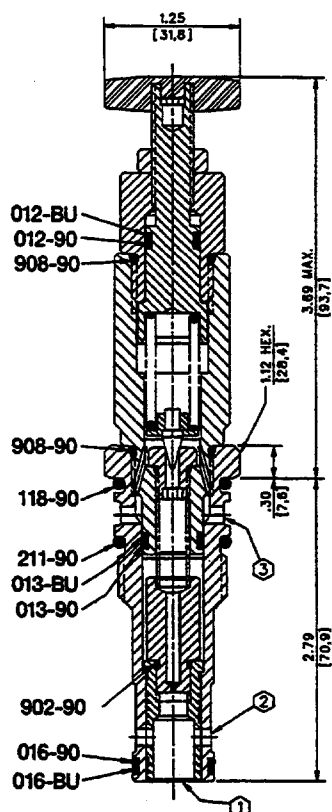

Form Tool Cavity  
HSPR-800-3

Line Mount Block  
CJ1-10-C

#### Application

The HSPR valve regulates and maintains reduced pressure (from the main hydraulic system) in a secondary circuit.

#### Operation

Outlet (port 1) pressure is transmitted thru an orifice in the center of the valve to the pilot relief valve (in upper portion of the body). When outlet pressure exceeds this valve setting, pressure on top side of the spool is relieved (thru port 3), a pressure imbalance then exists across the main spool. The main spool and sleeve tend to move and throttle or shut off flow between ports 2 and 1. If pressure in the secondary system drops, the pilot valve reseats, the main spool is again balanced and spring forces main spool and sleeve downward and allows flow again from port 2 to port 1.

#### Features

Several pressure ranges are available for this high accuracy pilot operated design. HSPR cartridge valve is constructed of steel parts and all operating parts are hardened as required. Cartridge is designed for easy service or field repair.

#### Specifications

Rated flow to—36 USgpm  $\Delta$  280 psi  
(1364 lpm  $\Delta$  19,3 bar)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—See "How To Order"


Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F

Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)

Filtration—Maintain SAE Class 6, ISO 18/15  
Seal kit—HSSK-800-C


#### Performance Curve

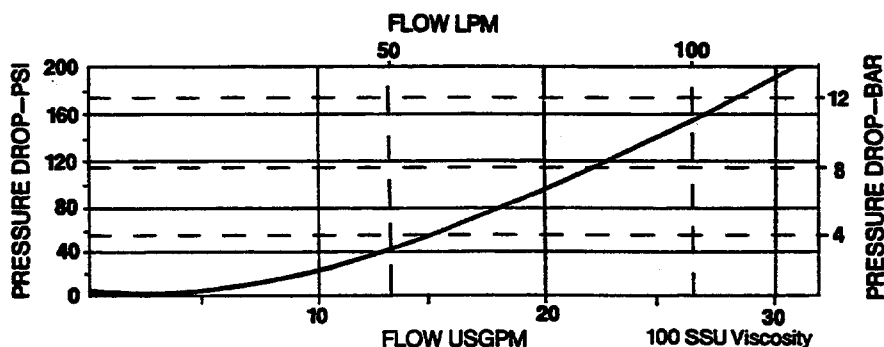



22 USGPM  $\Delta$  100 PSI  
(83,4 LPM  $\Delta$  6,9 Bar)

### HSPR801-P




Data Sheet

Piloted Sleeve Pressure Reducing Valve

### Line Mount Specifications

HSPR801-P/CJ1-10-C

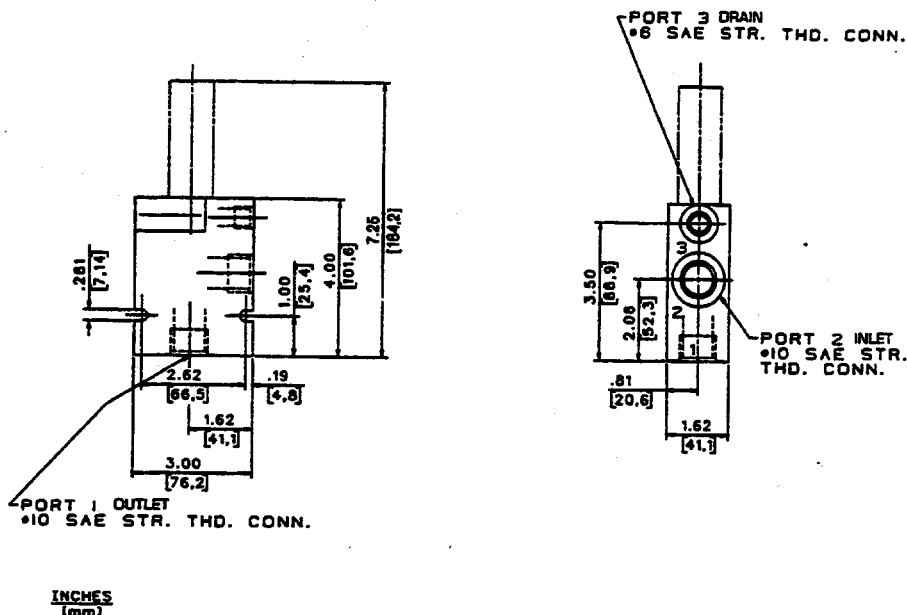

## How To Order

### Screw-In Cartridge Only

HSPR801-P-


	Pressure Range	
	psi	bar
07	50- 700	3,4- 48
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345

### Cartridge With Line Mount Block

HSPR801-P-\_/CJ1-10-C

25 USGPM  $\Delta$  100 PSI  
(106,1 LPM  $\Delta$  6,9 Bar)


### HSPRB1201



#### Data Sheet

#### Spool Pressure Reducing Valve for Pilot Operation

400969HS

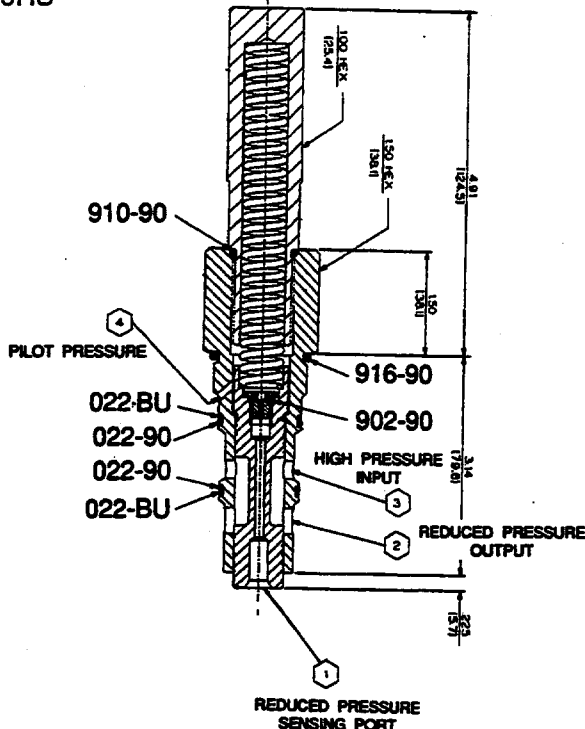

Form Tool  
HS-1200-3B

Line Mount Block  
DT1-16-C

#### Application

This HSPRB cartridge is designed to be piloted by one or more HSLR relief valves and can be used to provide multiple pressure settings and/or blocking.

#### Operation

When cartridge is installed in it's cavity, port 1 is connected to port 2. A HSLR pilot relief valve must be connected via port 4 to top (spring side) of the spool. Outlet (port 2) pressure is transmitted thru an orifice in the center of the spool and port 4 to the pilot valve. When outlet pressure exceeds the pilot valve setting, pressure on the top side of the spool is releived and a pressure imbalance exists across the spool. The spool tends to rise in its bore and throttle or shut-off flow between ports 3 and 2. If pressure in the secondary system drops below the relief valve setting, the pilot valve reseats, spool is again balanced and spring forces spool downward to allow flow from port 3 to 2.


#### Features

Used with one or more HSLR pilot valves, several repeatable high hysteresis pressure ranges are available. Alternative orifice sizes and spring forces are available to further control sensitivity and speed of operation. Cartridge is constructed of steel parts and all operating parts are hardened as required. Cartridge is designed for easy service or field repair.

#### Specifications


Rated flow to - 43US gpm  $\Delta$  260 psi  
(163,0 lpm  $\Delta$  17,9 Bar)  
Maximum operating pressure - 5000 psi (345 Bar)  
Adjustable pressure range - See HSLR Pilot Valve  
(Section 5, Page B1.1 & B2.1)  
Viscosity range - 27-2000 SSU at 100°F  
Seal Vition  
Operating temperature - -40°F to 350°F  
(-39,6°C to 175°C)  
Filtration - Maintain SAE Class 6, ISO 18/15  
Seal Kit - HSSK-1200-D

#### Performance Curve

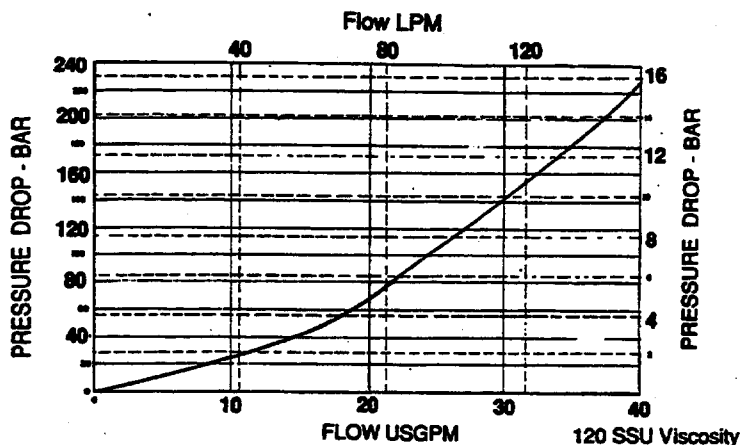

25 USGPM  $\Delta$  100 PSI  
(106,1 LPM  $\Delta$  6,9 Bar)


### HSPRB1201



#### Data Sheet

#### Spool Pressure Reducing Valve for Pilot Operation

#### Line Mount Specification

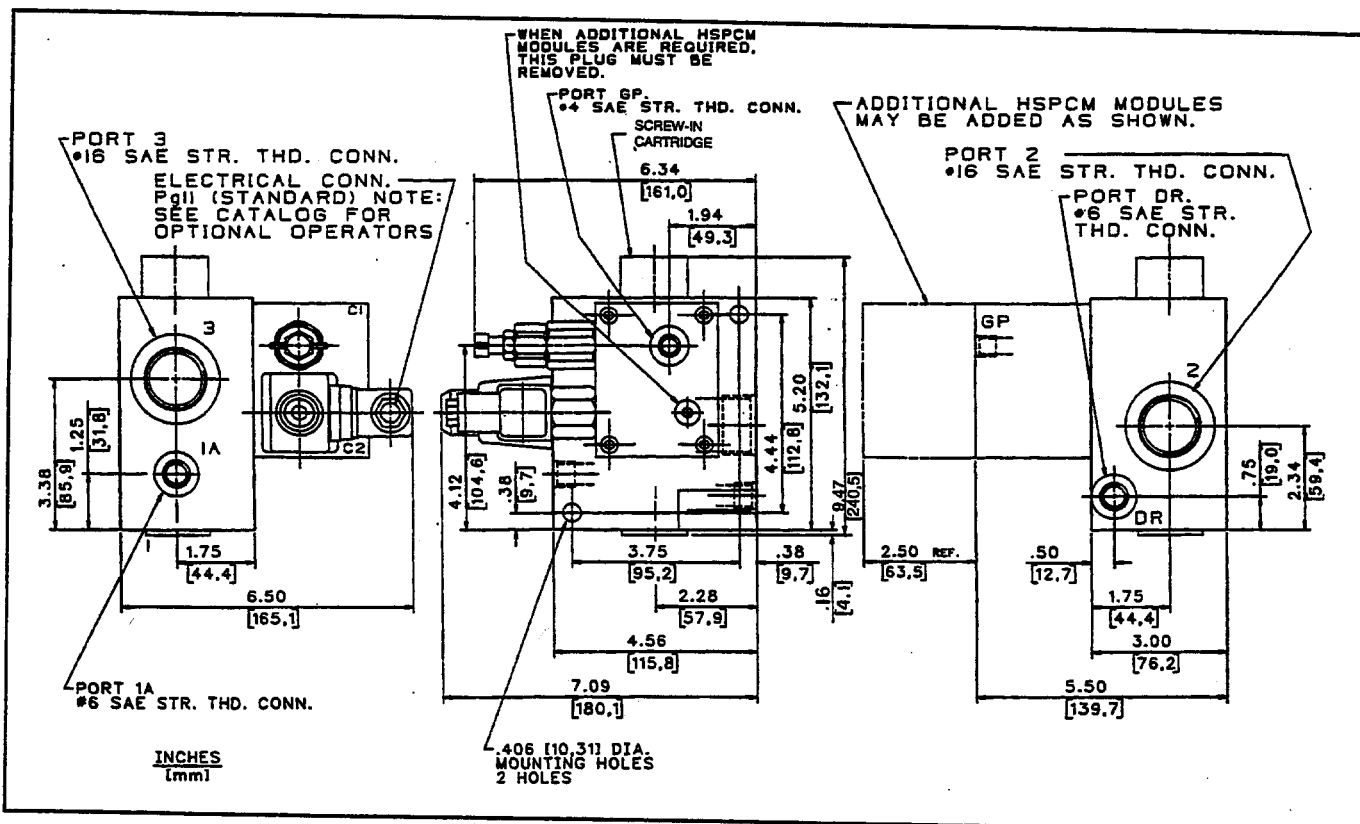

## How To Order

### Screw-In Cartridge Only

HSPRB1201-

	Spring
H =	Heavy
L =	Light

	Orifice Plug
2 =	0.026"
3 =	0.030"


### Cartridge With Line Mounted Block

HSPRB1201-\_\_\_/DT1-16-C\*

\* Line Mount Block shown includes Pilot Control Modules (PCM). See pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

25 USGPM  $\Delta$  100 PSI  
(106,1 LPM  $\Delta$  6,9 Bar)

### HSPRB1201



#### Data Sheet


#### Spool Pressure Reducing Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.


#### Typical HSPRB1201 How To Order Example

HSPRB1201 \_\_ - \_\_ /DT1-16-C/1-35-4-C/Optional

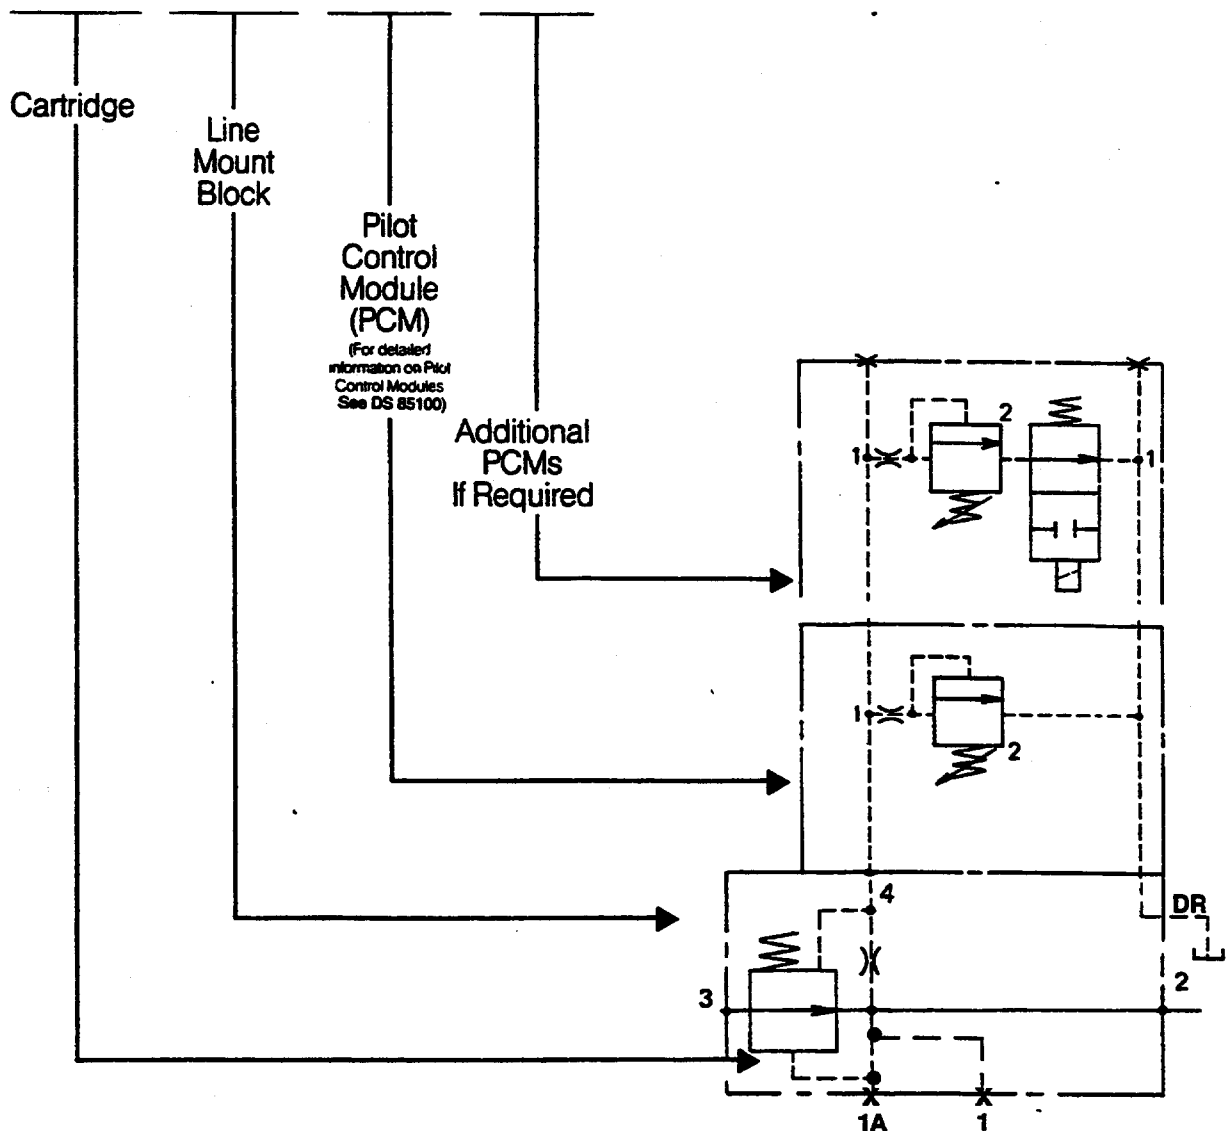

25 USGPM  $\Delta$  100 PSI  
(106,1 LPM  $\Delta$  6,9 Bar)

### HSPRB1201



#### Data Sheet


#### Spool Pressure Reducing Valve for Pilot Operation

### How To Order


Typical PCM How To Order Example:

/30 - 35 - 4 - 0W - C


#### PCM Code

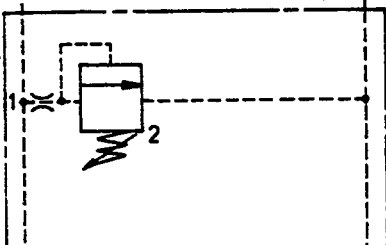


PCM Code 1

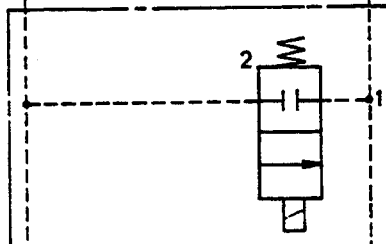


PCM Code 2

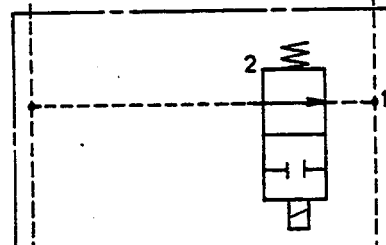

PCM Code 20

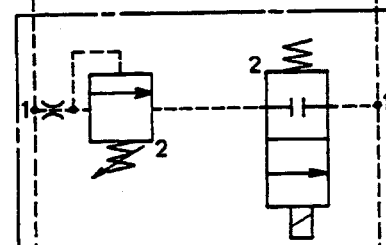

PCM Code 3

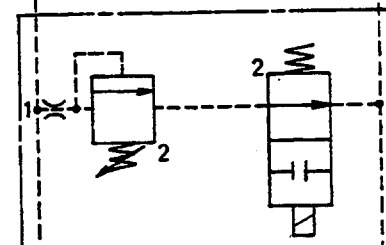

PCM Code 30

#### Pressure Range

07 = 50 - 700 psi (3,4 - 48,0 bar)  
20 = 50 - 2000 psi (3,4 - 138,0 bar)  
35 = 50 - 3500 psi (3,4 - 241,0 bar)  
50 = 50 - 5000 psi (3,4 - 345,0 bar)

#### Orifice Diameter

4 = .040 Diameter (Standard)  
See DS 85100 for special applications

#### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid  
Other voltages are available, consult factory

#### Electrical Connector (if required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650 connector w/mating plug


#### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information on pilot controls.

43USGPM  $\Delta$  100 PSI  
(163,0 LPM  $\Delta$  6,9 Bar)


### HSPRB1601



### Data Sheet

### Spool Pressure Reducing Valve for Pilot Operation

400970HS

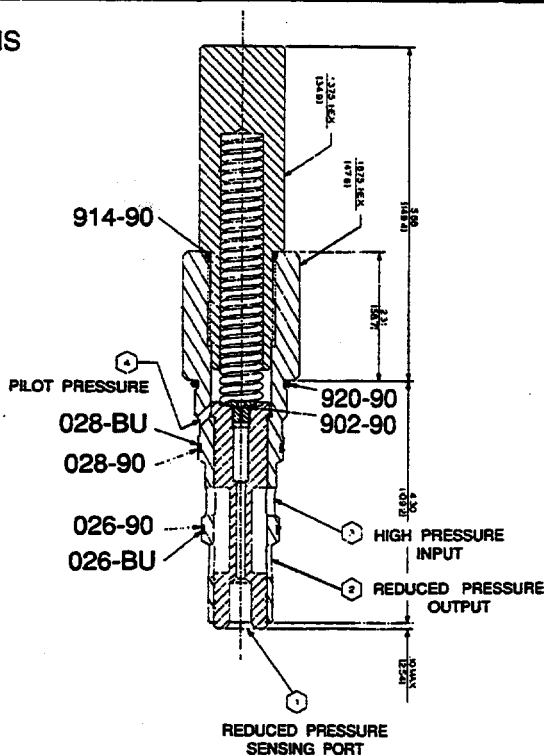

Form Tool Cavity  
HS-1600-3B

Line Mount Block  
EW1-24-C  
EW1-66-C

### Application

This HSPRB cartridge is designed to be piloted by one or more HSLR relief valves and can be used to provide multiple pressure settings and/or blocking.

### Operation

When cartridge is installed in its cavity, port 1 is connected to port 2. A HSLR pilot relief valve must be connected via port 4 to the top (spring side) of the spool. Outlet (port 2) pressure is transmitted thru an orifice in the center of the spool and port 4 to the pilot valve. When outlet pressure exceeds the pilot valve setting, pressure exceeds the pilot valve setting, pressure on the top side of the spool is relieved and a pressure imbalance exists across the spool. The spool tends to rise in its bore and throttle or shut-off flow between ports 3 and 2. If pressure in the secondary system drops below the relief valve setting, the pilot valve re-seats, spool is again balanced and spring forces spool downward to allow flow from port 3 to 2.


### Features

Used with one or more HSLR pilot valves, several repeatable high hysteresis pressure ranges are available. Alternative orifice sizes and spring forces are available to further control sensitivity and speed of operation. Cartridge is constructed of steel parts and all operating parts are hardened as required. Cartridge is designed for easy service or field repair.

### Specifications


Rated flow to - 85US gpm  $\Delta$  260 psi  
(322,2 lpm  $\Delta$  17,9 Bar)  
Maximum operating pressure - 5000 psi (345 Bar)  
Adjustable pressure range - See HSLR Pilot Valve DS 82550-B2.1A  
Viscosity range - 27-30 SSU at 100°F  
35-2000 SSU at 100°F  
Seals - Viton  
Operating temperature - -40°F to 350°F  
(-39,6°C to 175°C)  
Filtration - Maintain SAE class 6, ISO 18/15  
Seal Kit - HSSK-1600-C

### Performance Curve

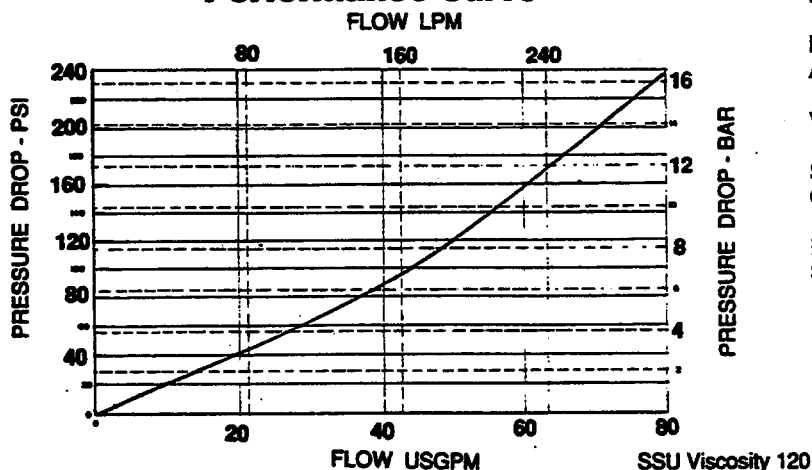

43USGPM  $\Delta$ 100 PSI  
(163,0 LPM  $\Delta$  6,9 Bar)



## HSPRB1601



### Data Sheet

### Spool Pressure Reducing Valve for Pilot Operation

### Line Mount Specifications

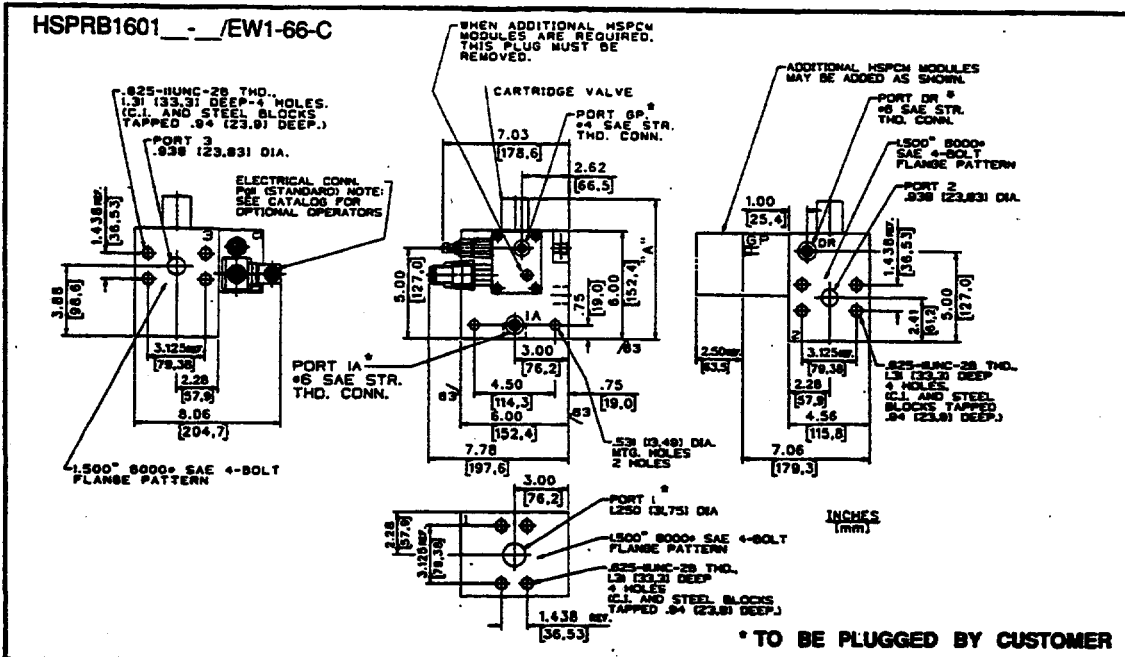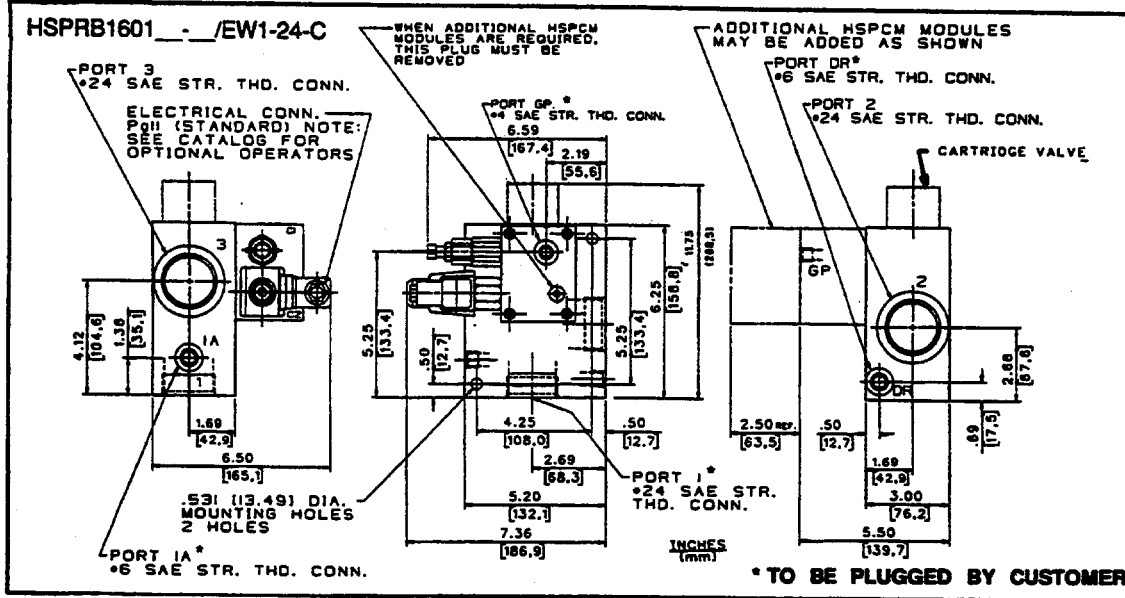

### How To Order Screw-In Cartridge Only HSPRB1601-

	Spring
H =	Heavy
L =	Light
	Orifice Plug
2 =	0.026"
3 =	0.030"

### Cartridge With Line Mount Block


3000 psi (207 Bar) service pressure  
HSPRB1601- - /EW1-24-C\*

5000 psi (345 Bar) service pressure  
HSPRB1601- - /EW1-66-C\*

\* Line Mount Block shown includes Pilot Control Modules (PCM). See pages 3 and 4 for "How To Order" Line Mount Blocks with Pilot Control Modules.

43USGPM  $\Delta$ 100 PSI  
(163,0 LPM  $\Delta$  6,9 Bar)

### HSPRB1601



#### Data Sheet


#### Spool Pressure Reducing Valve for Pilot Operation

#### Cartridge Must Have Pilot Control Module

This cartridge valve requires pilot logic to offer added flexibility in providing maximum pressure consistently and smoothly. At least one pilot control module must be added to the valve.

#### Typical HSPRB1601 How To Order Example


HSPRB1601 - - /EW1-24-C/1-35-4-C/Optional

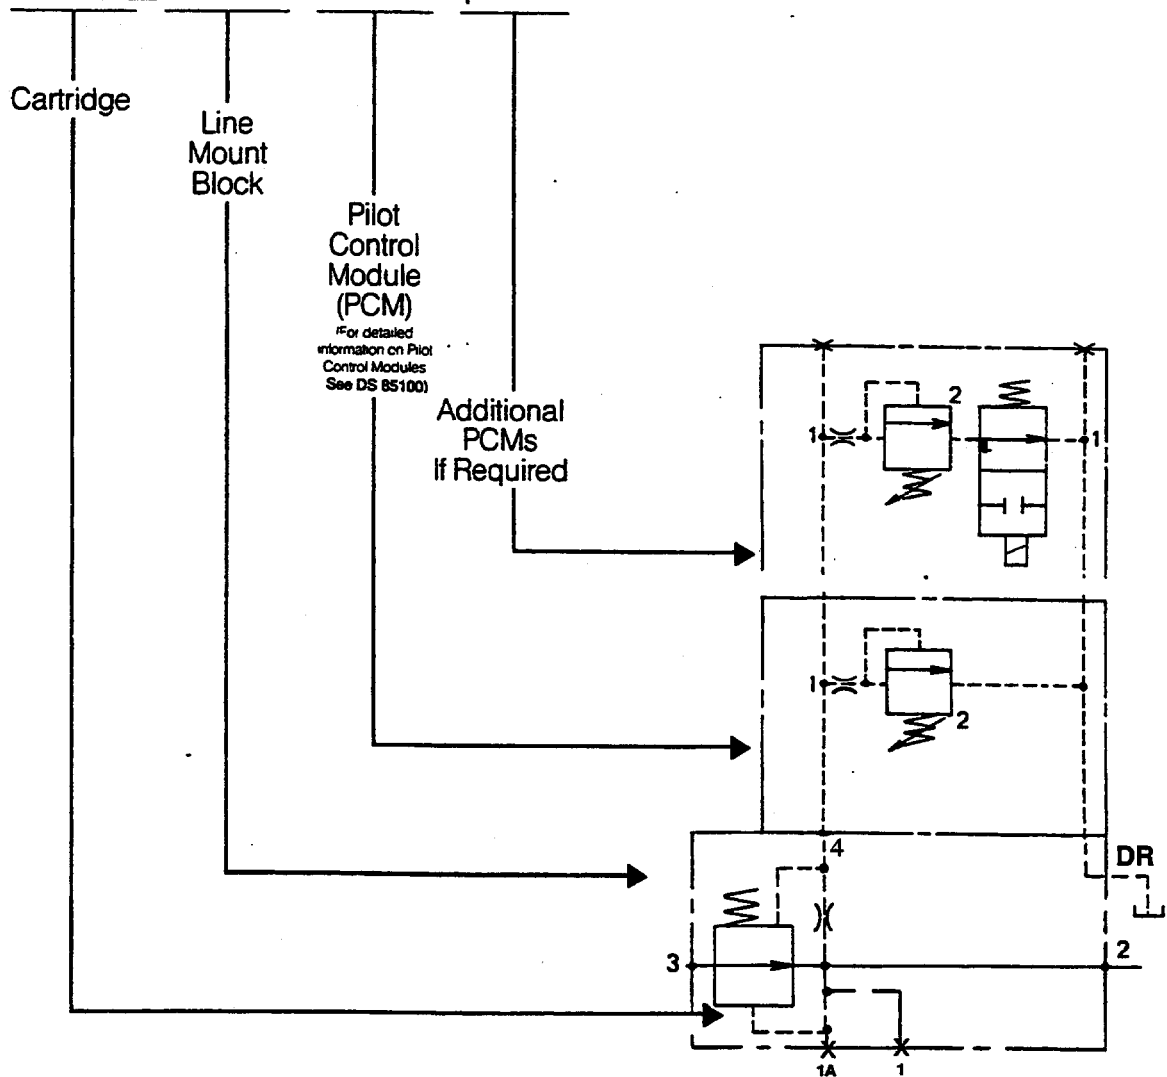



43USGPM  $\Delta$  100 PSI  
(163,0 LPM  $\Delta$  6,9 Bar)

### HSPRB1601



Data Sheet


Spool Pressure Reducing Valve for Pilot Operation

## How To Order


Typical PCM How To Order Example:

/30 - 35 - 4 - 0W - C


### PCM Code

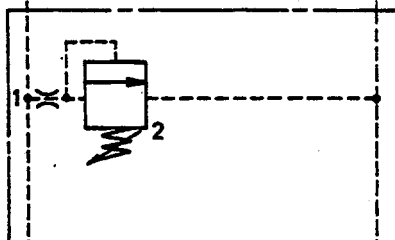


PCM Code 1

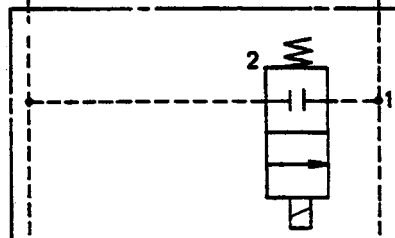


PCM Code 2

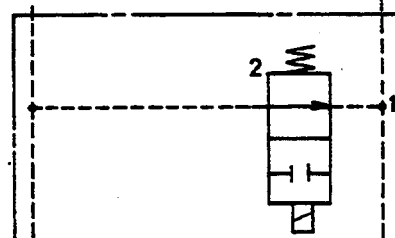

PCM Code 20

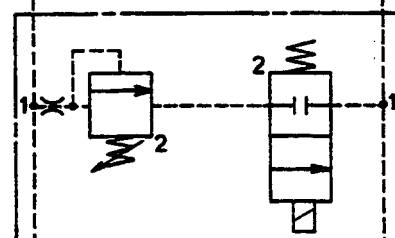

PCM Code 3

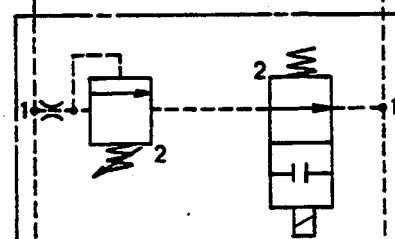

PCM Code 30

### Pressure Range

07 = 50- 700 psi (3,4- 48,0 bar)  
20 = 50-2000 psi (3,4-138,0 bar)  
35 = 50-3500 psi (3,4-241,0 bar)  
50 = 50-5000 psi (3,4-345,0 bar)

### Orifice Diameter

4 = .040 Diameter (Standard)

See DS 85100 for  
special applications ;

### Solenoid Voltage (if required)

0 = 115 V.A.C./60 HZ. or 110 V.A.C./50 HZ. Solenoid  
1 = 230 V.A.C./60 HZ. or 220 V.A.C./50 HZ. Solenoid  
2 = 12 V.D.C. Solenoid  
3 = 24 V.D.C. Solenoid  
Other voltages are available, consult factory

### Electrical Connector (If required)

S = Cable connector w/o indicator light (standard)  
L = Cable connector with indicator light  
R = .500 NPTF connector w/o indicator light  
W = .500 NPTF connector w/indicator light  
C = Three pin Brad Harrison/DIN 43650  
connector w/mating plug


### Block Material

C = Nodular Iron (standard)

See DS 85100 for additional information  
on pilot controls.

19 USGPM  $\Delta$  100 PSI  
(72,0 LPM  $\Delta$  6,9 Bar)


### HSPRR801-P



#### Data Sheet

#### Pressure Reducing & Relieving Valve

400825HS

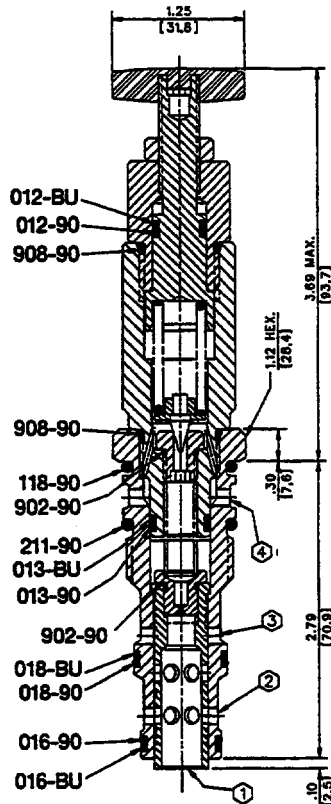

Form Tool Cavity  
HS-800-4

Line Mount Block  
CM1-10-C

#### Application

The HSPRR valve is used to provide and maintain a regulated pressure (to a secondary circuit) that is lower than the supply pressure. The valve also provides a relief function for the regulated circuit at a pressure slightly (approximately 3%) above the reduced pressure setting.

#### Operation

Outlet (port 1) pressure is transmitted thru an orifice in the center of the spool to the pilot relief valve (in upper portion of the body). When outlet pressure exceeds this valve setting, pressure on the top side of the main spool and sleeve is relieved (thru port 4), a pressure imbalance then exists across the main spool. The main spool and sleeve tend to rise and throttle or shut-off flow between ports 2 and 1. If pressure in secondary circuit (port 1) which is now shut-off from main circuit (port 2), rises above the relief valve setting, the pressure on the top side of the spool is relieved again (thru port 4) again creating a pressure imbalance across the main spool and pressure at port 1 pushes the main spool and sleeve higher in the body until port 1 is connected thru the sleeve to (tank) port 3. Note: that in this position port 2 remains blocked.

#### Features

Two valve function from one low cost cartridge. Several pressure ranges available with this high accuracy pilot operated design. Constructed of steel parts and operating parts are hardened as required. Cartridge is designed for easy service or field repair.

#### Specifications

Rated flow to—33 USgpm  $\Delta$  300 psi  
(125 lpm  $\Delta$  20,7 bar)

Maximum operating pressure—  
5000 psi (345 bar)

Adjustable pressure range—Depends on pressure range selected. See "How To Order"


Viscosity range—27-30 SSU at 100°F  
35-2000 SSU at 100°F

Seals—Viton

Operating temperature—-40°F to 350°F  
(-39,6°C to 175°C)


Filtration—Maintain SAE Class 6, ISO 18/15  
Seal kit—HSSK-800-D

#### Performance Curve

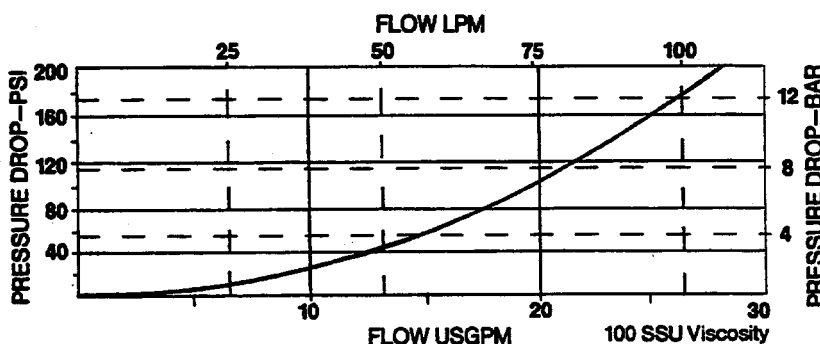

19 USGPM  $\Delta$  100 PSI  
(72,0 LPM  $\Delta$  6,9 Bar)

### HSPRR801-P




Data Sheet

Pressure Reducing & Relieving Valve

### Line Mount Specifications

HSPRR801-P/CM1-10-C

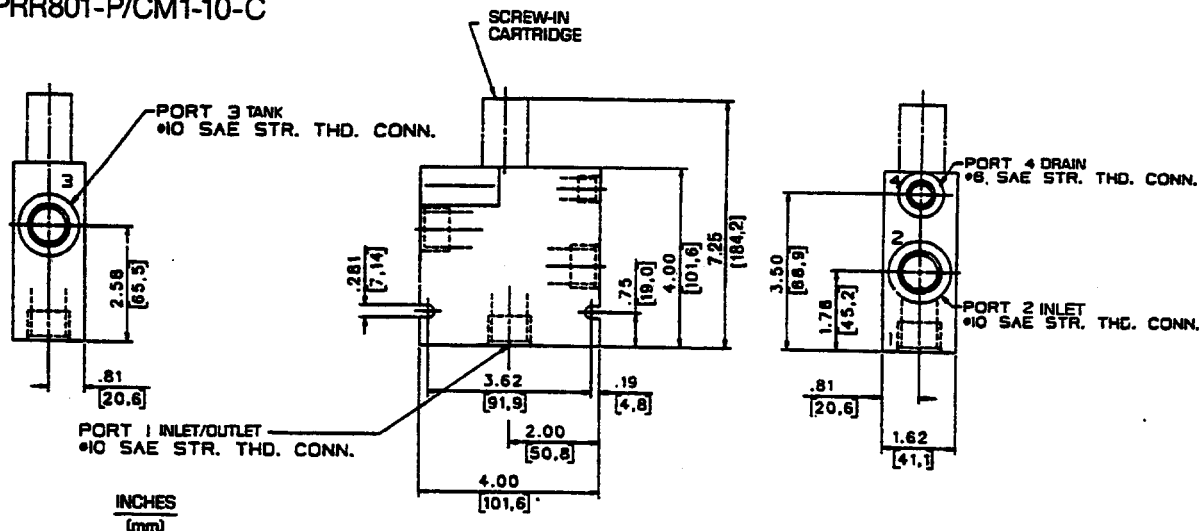

### How To Order

#### Screw-In Cartridge Only

HSPRR801-P-

	Pressure Range	
	psi	bar
07	50- 700	3,4- 48
20	50-2000	3,4-138
35	50-3500	3,4-241
50	50-5000	3,4-345

#### Cartridge With Line Mount Block

HSPRR801-P-\_/CM1-10-C